

## TurboChill™

200kW to 1700kW

Air Cooled (TCC) and FreeCool (TCF) Chiller  
R134a



## Technical Manual



ISO 14001  
EMSS2086



ISO 9001  
FM00542

### Warranty, Commissioning & Maintenance

As standard, Airedale guarantees all non consumable parts only for a period of 12 months, variations tailored to suit product and application are also available; please contact Airedale for full terms and details.

To further protect your investment in Airedale products, Airedale can provide full commissioning services, comprehensive maintenance packages and service cover 24 hours a day, 365 days a year (UK mainland).

For a free quotation contact Airedale or your local Sales Engineer.

All Airedale products are designed in accordance with EU Directives regarding prevention of build up of water, associated with the risk of contaminants such as Legionella.

For effective prevention of such risk it is necessary that the equipment is maintained in accordance with Airedale recommendations.

#### ChillerGuard™

In addition to commissioning, a 24 hour, 7 days a week on-call service is available throughout the year to UK mainland sites. This service will enable customers to contact a duty engineer outside normal working hours and receive assistance over the telephone. The duty engineer can, if necessary, attend site, usually within 24 hours or less.

Full details will be forwarded on acceptance of the maintenance agreement.

#### CAUTION

Warranty cover is not a substitute for maintenance. Warranty cover is conditional to maintenance being carried out in accordance with the recommendations provided during the warranty period. Failure to have the maintenance procedures carried out will invalidate the warranty and any liabilities by Airedale International Air Conditioning Ltd.

#### Spares

A spares list for 1, 3 and 5 years will be supplied with every unit and is also available from our Spares department on request.

#### Training

As well as our comprehensive range of products, Airedale offers a modular range of Refrigeration and Air Conditioning Training courses, for further information please contact Airedale.

#### Customer Services

For further assistance, please e-mail: [enquiries@airedale.com](mailto:enquiries@airedale.com) or telephone:

UK Sales Enquiries	+ 44 (0) 113 239 1000	<a href="mailto:enquiries@airedale.com">enquiries@airedale.com</a>
International Enquiries	+ 44 (0) 113 239 1000	<a href="mailto:enquiries@airedale.com">enquiries@airedale.com</a>
Spares Hot Line	+ 44 (0) 113 238 7878	<a href="mailto:spares@airedale.com">spares@airedale.com</a>
Airedale Service	+ 44 (0) 113 239 1000	<a href="mailto:service@airedale.com">service@airedale.com</a>
Technical Support	+ 44 (0) 113 239 1000	<a href="mailto:tech.support@airedale.com">tech.support@airedale.com</a>
Training Enquiries	+ 44 (0) 113 239 1000	<a href="mailto:marketing@airedale.com">marketing@airedale.com</a>

For information, visit us at our Web Site: [www.airedale.com](http://www.airedale.com)

Airedale Ltd endeavours to ensure that the information in this document is correct and fairly stated, but none of the statements are to be relied upon as a statement or representation of fact. Airedale Ltd does not accept liability for any error or omission, or for any reliance placed on the information contained in this document. The development of Airedale products and services is continuous and the information in this document may not be up to date. It is important to check the current position with Airedale Ltd at the address stated. This document is not part of a contract or licence unless expressly agreed. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or information storage and retrieval systems, for any purpose other than the purchaser's personal use, without the express written permission of Airedale Ltd.

© 2014 Airedale International Air Conditioning Limited. All rights reserved. Printed in the UK.

**Warranty**

All Airedale products or parts (non consumable) supplied for installation within the UK mainland and commissioned by an Airedale engineer, carry a full Parts & Labour warranty for a period of 12 months from the date of commissioning or 18 months from the date of despatch, whichever is the sooner.

Parts or Equipment supplied by Airedale for installation within the UK or for Export that are properly commissioned in accordance with Airedale standards and specification, not commissioned by an Airedale engineer; carry a 12 month warranty on non consumable Parts only from the date of commissioning or 18 months from the date of despatch, whichever is the sooner.

Parts or equipment installed or commissioned not to acceptable Airedale standards or specification invalidate all warranty.

**Warranty is only valid in the event that**

In the period between delivery and commissioning the equipment, is properly protected & serviced as per the Airedale installation & maintenance manual provided where applicable the glycol content is maintained to the correct level.

In the event of a problem being reported and once warranty is confirmed as valid under the given installation and operating conditions, the Company will provide the appropriate warranty coverage (as detailed above) attributable to the rectification of any affected Airedale equipment supplied (excluding costs for any specialist access or lifting equipment that must be ordered by the customer).

Any spare part supplied by Airedale under warranty shall be warranted for the unexpired period of the warranty or 3 months from delivery, whichever period is the longer.

To be read in conjunction with the Airedale Conditions of Sale - Warranty and Warranty Procedure, available upon request.

**Procedure**

When a component part fails, a replacement part should be obtained through our Spares department. If the part is considered to be under warranty, the following details are required to process this requirement. Full description of part required, including Airedale's part number, if known. The original equipment serial number. An appropriate purchase order number.

A spares order will be raised under our warranty system and the replacement part will be despatched, usually within 24 hours should they be in stock. When replaced, the faulty part must be returned to Airedale with a suitably completed and securely attached "Faulty Component Return" (FCR) tag. FCR tags are available from Airedale and supplied with each Warranty order.

On receipt of the faulty part, suitably tagged, Airedale will pass to its Warranty department, where it will be fully inspected and tested in order to identify the reason for failure, identifying at the same time whether warranty is justified or not.

On completion of the investigation of the returned part, a full "Report on Goods Returned" will be issued. On occasion the release of this complete report may be delayed as component manufacturers become involved in the investigation.

When warranty is allowed, a credit against the Warranty invoice will be raised. Should warranty be refused the Warranty invoice becomes payable on normal terms.

**Exclusions**

Warranty may be refused for the following reasons:

- Misapplication of product or component
- Incorrect site installation
- Incomplete commissioning documentation
- Inadequate site installation
- Inadequate site maintenance
- Damage caused by mishandling
- Replaced part being returned damaged without explanation
- Unnecessary delays incurred in return of defective component

**Returns Analysis**

All faulty components returned under warranty are analysed on a monthly basis as a means of verifying component and product reliability as well as supplier performance. It is important that all component failures are reported correctly.

**Health and Safety**

**IMPORTANT**

The information contained in this manual is critical to the correct operation and maintenance of the unit and should be read by all persons responsible for the installation, commissioning and maintenance of this Airedale unit.

**Safety**

The equipment has been designed and manufactured to meet international safety standards but, like any mechanical / electrical equipment, care must be taken if you are to obtain the best results.

**CAUTION**

When working with any air conditioning units ensure that the electrical isolator is switched off prior to servicing or repair work and that there is no power to any part of the equipment.

Also ensure that there are no other power feeds to the unit such as fire alarm circuits, BMS circuits, crankcase heater permanent supplies etc.

Electrical installation commissioning and maintenance work on this equipment should be undertaken by competent and trained personnel in accordance with local relevant standards and codes of practice.

**Refrigerant Warning**

These Airedale chillers use R134a refrigerant which requires careful attention to proper storage and handling procedures in accordance with EN 378.

Use only manifold gauge sets designed for use with refrigerants. Use only refrigerant recovery units and cylinders designed for the pressure category of the refrigerants.

The refrigerant used in this range of products is classified under the COSHH regulations as an irritant, with set Workplace Exposure Levels (WEL) for consideration if this plant is installed in confined or poorly ventilated areas.

A full hazard data sheet in accordance with COSHH regulations is available should this be required.

Refrigerants must only be charged in the liquid state.

The refrigerant must be stored in a clean, dry area away from sunlight. The refrigerant must never be stored above 50°C.

Global Warming Potential  
R134a = 1300

EN378-1 :2012 (100 year life)

**Maximum and Minimum Operation Temperature (TS) and Pressure (PS)**

Operating Temperature (TS),                      TS =    Min -20°C to Max 120°C \*

Maximum Operating Pressure (PS)              PS =    High Side 18.8 Barg

\*Based upon the maximum machine running temperatures.

**Protective Personal Equipment**

Airedale recommends that personal protective equipment is used whilst installing, maintaining and commissioning equipment.

**Manual Handling**

Some operations when servicing or maintaining the unit may require additional assistance with regards to manual handling. This requirement is down to the discretion of the engineer.

Remember do not perform a lift that exceeds your ability.



no access for people  
with active implanted  
cardiac devices

**CAUTION PACEMAKER WEARERS**

To avoid any risk of injury, any work to be carried out on or around the compressor and magnetic check valve should be done with personnel that don't have pacemakers fitted.

**CAUTION BURN HAZARDS**

Care must be taken when working around the discharge pipe work of the unit. High surface temperatures may exist during unit operation.

The refrigerant has a boiling point of -26°C.

**Environmental Considerations**

**Freeze Protection**

Airedale recommends the following actions to help protect the unit during low temperature operation. This also includes the units subject to low ambient temperatures.

**Units with supply water temperatures below +5°C**

Glycol is recommended when a supply water temperature of +5°C or below is required or when static water can be exposed to freezing temperatures.

**Units subject to ambient temperatures lower than 0°C, a minimum of 1 of the following is required:**

1. Glycol of an appropriate concentration <sup>(1)</sup> is used within the system to ensure adequate protection. Please ensure that the concentration is capable of protection at least 3°C lower than the minimum operating ambient.
2. Ensure water / glycol solution is constantly circulated through all waterside pipework and coils to avoid static water from freezing.
3. Ensure that pumps are started and running even during shut down periods, when the ambient is within 3°C of the solution freeze point <sup>(1)</sup> (i.e. if the solution freezes at 0°C, the pump must be operating at 3°C ambient).<sup>(2)</sup>
4. Additional trace heating is provided for interconnecting pipework.

(1) Refer to your glycol supplier for details.

(2) An actuated suction ball valve must be fitted to protect the compressor from liquid migration.

**Free Cooling Chillers**

A minimum of 20% glycol concentration must be applied to all free cooling chillers. Concentration should be increased so that its capable of protection at least 3°C lower than the minimum operating ambient.

**Environmental Policy**

It is our policy to:

- Take a proactive approach to resolve environmental issues and ensure compliance with regulatory requirements
- Train personnel in sound environmental practices
- Pursue opportunities to conserve resources, prevent pollution and eliminate waste
- Manufacture products in a responsible manner with minimum impact on the environment
- Reduce our use of chemicals and minimise their release to the environment
- Measure, control and verify environmental performance through internal and external audits
- Continually improve our environmental performance

**CE Directive**

Airedale certify that the equipment detailed in this manual conforms with the following EC Directives:

Electromagnetic Compatibility Directive (EMC)	2004/108/EC
Low Voltage Directive (LVD)	2006/95/EC
Machinery Directive (MD)	89/392/EEC version 2006/42/EC
Pressure Equipment Directive (PED)	97/23/EC

To comply with these directives appropriate national & harmonised standards have been applied. These are listed on the Declaration of Conformity, supplied with each product.

**Occupancy Note**

When placing a chiller the occupancy of the surrounding area needs to be classified in accordance with EN 378-1:2008+A2:2012 section 4.2. In most cases the level of occupancy for a chiller would be 'Authorised occupancy C' as described in EN 378-1:2008+A2:2012 section 4.2.5 Table 1. This level needs to be confirmed by the customer.

Given that an air-cooled chiller can be classified as an 'indirect system' in accordance with EN 378-1:2008+A2:2012 section 4.1.3 and the R134a refrigerant falls into refrigerant safety group A1, EN 378-1:2008+A2:2012 Table E.1, no charge limitations apply if the level of occupancy is 'C'.

Please refer to EN 378-1:2008+A2:2012 Table C.1 for further details.

## Contents

<b>Warranty, Commissioning &amp; Maintenance</b>	<b>2</b>
ChillerGuard™	2
Customer Services	2
Warranty	3
<b>Health and Safety</b>	<b>4</b>
Safety	4
Environmental Considerations	6
Environmental Policy	6
Occupancy Note	6
<b>Nomenclature</b>	<b>12</b>
<b>Range Layout</b>	<b>14</b>
<b>Unit Overview</b>	<b>18</b>
<b>Unit Components</b>	<b>20</b>
Refrigeration	20
TurboCor Compressor	22
Condenser	23
Electrical	24
Condenser Fans	26
Waterside	28
Controls	36
Mechanical	40
<b>Design Features &amp; Information</b>	<b>42</b>
Pipework Design	42
Refrigeration Schematic	42
Specific Heat Capacity (SHC)	43
Minimum System Water Volume Calculations	43
Typical Part Load Efficiencies	45
Water System	48
Grooved & Clamped Type Connection	48
Standard Recommended Installation	48
Water Systems and Recommended Flow Schemes	49

# Contents

<b>Technical Data - TCC (R)</b>	<b>52</b>
TCC11R04S-01, TCC11R06S-01, TCC11R08S-01	52
TCC11R06L-02, TCC11R08L-03, TCC11R10L-03	54
TCC12R08S-04, TCC12R10S-04, TCC12R12S-04	56
TCC12R14S-04, TCC12R10L-05, TCC12R12L-06	58
TCC12R14L-06, TCC12R16L-06, TCC12R18L-06, TCC12R20L-06	60
TCC22R08S-14, TCC22R10S-14, TCC22R12S-14, TCC22R14S-14	62
TCC22R10L-15, TCC22R12L-15, TCC22R14L-15	64
TCC22R16L-16, TCC22R18L-16, TCC22R20L-16	66
TCC23R12S-17, TCC23R14S-17, TCC23R16S-17, TCC23R18S-17	68
TCC23R16L-19, TCC23R18L-19	70
TCC23R20L-20, TCC23R22L-20, TCC23R24L-20	72
TCC24R16S-18, TCC24R18S-18	74
TCC24R20S-18, TCC24R22S-18, TCC24R24S-18	76
TCC24R20L-21, TCC24R22L-21, TCC24R24L-21	78
<b>Technical Data - TCC (X)</b>	<b>80</b>
TCC11X04S-01, TCC11X06S-01, TCC11X08S-01	80
TCC11X06L-02, TCC11X08L-03, TCC11X10L-03	82
TCC12X08S-04, TCC12X10S-04, TCC12X12S-04	84
TCC12X14S-04, TCC12X10L-05, TCC12X12L-06	86
TCC12X14L-06, TCC12X16L-06, TCC12X18L-06, TCC12X20L-06	88
TCC22X08S-14, TCC22X10S-14, TCC22X12S-14, TCC22X14S-14	90
TCC22X10L-15, TCC22X12L-15, TCC22X14L-15	92
TCC22X16L-16, TCC22X18L-16, TCC22X20L-16	94
TCC23X12S-17, TCC23X14S-17, TCC23X16S-17, TCC23X18S-17	96
TCC23X16L-19, TCC23X18L-19	98
TCC23X20L-20, TCC23X22L-20, TCC23X24L-20	100
TCC24X16S-18, TCC24X18S-18, TCC24X20S-18	102
TCC24X22S-18, TCC24X24S-18	104
TCC24X20L-21, TCC24X22L-21, TCC24X24L-21	106
<b>Sound Data - TCC</b>	<b>108</b>
TCC - AC Fans	108
TCC - EC Fans	114
TCC - High Airflow EC Fans	120



## Contents


<b>Technical Data - TCF (R)</b>	<b>124</b>
TCF11R06S-07, TCF11R08S-07, TCF11R06L-11	124
TCF11R08L-08, TCF11R10L-10, TCF12R08S-09	126
TCF12R10S-05, TCF12R12S-05, TCF12R14S-05	128
TCF12R12L-12, TCF12R14L-12, TCF12R16L-12	130
TCF12R18L-13, TCF12R20L-13	132
TCF22R10S-22, TCF22R12S-22, TCF22R14S-22	134
TCF22R12L-23, TCF22R14L-23, TCF22R16L-23	136
TCF22R18L-23, TCF22R20L-23	138
TCF23R12S-24, TCF23R14S-24, TCF23R16S-25, TCF23R18S-25	140
TCF24R16S-26, TCF24R18S-26, TCF24R20S-26	142
TCF24R22S-27, TCF24R24S-27	144
TCF24R22L-21, TCF24R24L-21	146
<b>Technical Data -TCF (X)</b>	<b>148</b>
TCF11X06S-07, TCF11X08S-07, TCF11X06L-11	148
TCF11X08L-08, TCF11X10L-10, TCF12X08S-09	150
TCF12X10S-05, TCF12X12S-05, TCF12X14S-05	152
TCF12X12L-12, TCF12X14L-12, TCF12X16L-12	154
TCF12X18L-13, TCF12X20L-13	156
TCF22X10S-22, TCF22X12S-22, TCF22X14S-22	158
TCF22X12L-23, TCF22X14L-23, TCF22X16L-23	160
TCF22X18L-23, TCF22X20L-23	162
TCC22X18L-23, TCF22X20L-23	164
TCF23X12S-24, TCF23X14S-24, TCF23X16S-25, TCF23X18S-25	166
TCF23X18L-28, TCF23X20L-28, TCF23X22L-28, TCF23X24L-28	168
TCF24X16S-26, TCF24X18S-26, TCF24X20S-26	170
TCF24X22S-27, TCF24X24S-27, TCF24X22L-21, TCF24X24L-21	172
<b>Sound Data - TCF</b>	<b>174</b>
TCF - AC Fans	174
TCF - EC Fans	179
TCF - High Airflow EC Fans	184

## Contents

<b>Hydronic Data</b>	<b>187</b>
TCC Waterside Pressure Drop kPa (100% Water)	187
TCF Waterside Pressure Drop kPa (20% Ethylene Glycol)	190
Evaporator Pressure Drop - 100% Water	192
Evaporator Pressure Drop - 20% Ethylene Glycol	193
Strainer Pressure Drop - 100% Water	194
Strainer Pressure Drop - 20% Ethylene Glycol	194
<b>Installation Data</b>	<b>195</b>
Air Cooled Masses & Centre of Gravity (C of G)	195
Point Loadings	199
Unit Lifting	207
Lifting Dimensions	207
General Arrangement	209
Positioning	225
Airflow & Maintenance Clearances	225
Anti Vibration Mounting (Optional)	226
Interconnecting Wiring	228
Power Quality & Harmonics	229
Liquid Level Sensor	230
<b>Pre Start Checks</b>	<b>231</b>
pCO <sub>2</sub> Built In Display and Keypad	232
<b>Unit Operation</b>	<b>233</b>
Restarting the Unit	233
Changing the Setpoint	234
Enabling Pumps	235
<b>Maintenance</b>	<b>236</b>
General Inspections	236
Electrical Inspection	237
Refrigeration	238
Waterside	239
Controls	241
System	242
<b>Troubleshooting</b>	<b>243</b>
<b>Alarms</b>	<b>245</b>
Alarm Menu Display	245
Pump Alarms	252

Intentionally Blank

**Nomenclature**

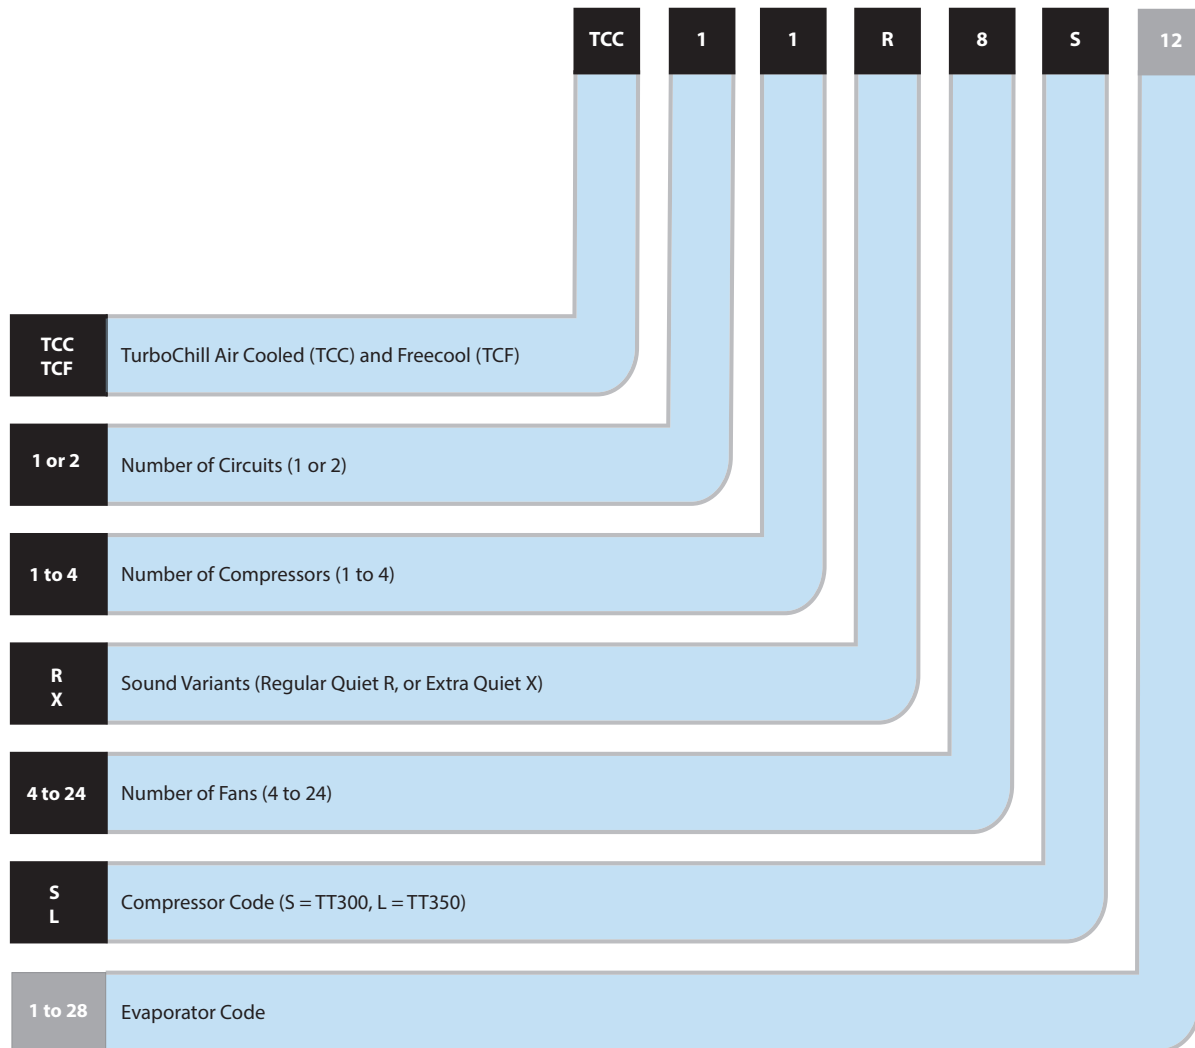

**Introduction**

The Airedale range of TurboChill air cooled and Freecool liquid chillers uses the technologically superior centrifugal Turbocor compressors. Designed to cover the high capacity range between 200kW and 1700kW.

Each model is individually selected to provide the optimum solution for each application by offering maximum flexibility and matching customer requirements in terms of:

- Capacity
- EER/ESEER (Energy Efficiency Ratio and European Seasonal Energy Efficiency ratio)
- Sound Levels - Quiet (R) and Extra Quiet (X)
- Footprint

For guidance the unit's information within this manual has been generated at nominal conditions, due to the unit's ability to modulate capacity individually tailored unit solutions are available.

Please contact Airedale with your specific requirements and we will be pleased to provide you with an individually tailored selection and technical detail.

**Refrigerants**

The range has been designed and optimised for operation with ozone benign R134a refrigerant.

**Construction**

The base shall be fabricated from galvanised steel to ensure a rigid, durable, weatherproof construction.

Unit panels shall be manufactured from galvanised sheet steel coated with epoxy baked powder paint to provide a durable and weatherproof finish.

Standard unit colour shall be Light Grey (RAL 7035).

**Free Cooling Operation**

The TurboChill Free Cool chiller has been designed to provide the cooling load required whilst optimising energy efficiency at all times and as such will take advantage of free cooling whenever available. If the free cooling available cannot satisfy the required full cooling load, direct expansion cooling is used to supplement the output.


In high ambients where free cooling is not available the fan speed modulates in the conventional manner to maintain an optimised head pressure. Free cooling is initiated wherever the outdoor ambient is 2°C less than the return water temperature.

During concurrent cooling mode condensing temperature is constantly monitored and intelligently kept within the compressor envelope to allow the fans to run as fast as possible and therefore achieve the most free-cooling without having a negative impact on compressor integrity.

In ambients where the free cooling coil is capable of satisfying the full cooling demand, the condenser fans are modulated to provide the desired duty. The condenser fans are capable of being modulated between 15-100% (EC) or 40% - 100% (AC) of airflow to maintain the supply water temperature.

During periods where the condenser fan speed has been reduced to a minimum, the supply water temperature will then be controlled by the 3 way valve.

**Free Cooling vs. Mechanical Cooling**

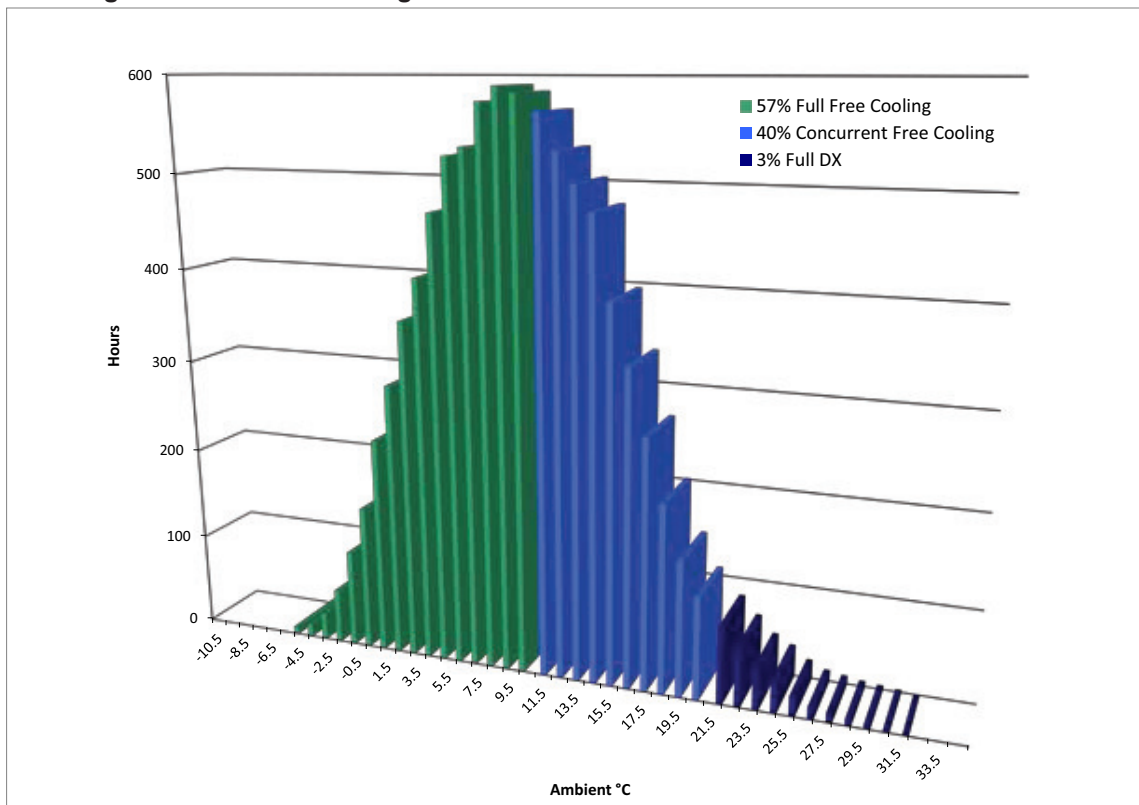

Range Layout

Regular Quiet - Single Circuit - Air Cooled

Model No	Nominal Cooling (kW)	EER	ESEER	Free-cooling (kW)	Free Cooling EER	Sound Pressure @ 10m (dBA)	Dimensions H x W x L (mm)
Regular Quiet - Single Circuit - Air Cooled							
TCC11R04S-01	240	3.50	4.93	-	-	54.8	2800 x 2200 x 2626
TCC11R06S-01	265	3.78	5.60	-	-	53.1	2800 x 2200 x 3758
TCC11R08S-01	275	3.97	5.93	-	-	52.3	2800 x 2200 x 4890
TCC11R06L-02	390	3.22	4.85	-	-	56.7	2800 x 2200 x 3758
TCC11R08L-03	425	3.36	5.29	-	-	56.1	2800 x 2200 x 4890
TCC11R10L-03	450	3.46	5.47	-	-	54.9	2800 x 2200 x 6022
TCC12R08S-04	470	3.51	5.41	-	-	57.2	2800 x 2200 x 4890
TCC12R10S-04	500	3.68	5.62	-	-	56.1	2800 x 2200 x 6022
TCC12R12S-04	530	3.77	5.73	-	-	55.4	2800 x 2200 x 7154
TCC12R14S-04	560	3.82	5.82	-	-	54.9	2800 x 2200 x 8286
TCC12R10L-05	600	3.32	5.24	-	-	58.8	2800 x 2200 x 6022
TCC12R12L-06	670	3.47	5.35	-	-	58.1	2800 x 2200 x 7154
TCC12R14L-06	750	3.50	5.49	-	-	57.9	2800 x 2200 x 8286
TCC12R16L-06	800	3.54	5.57	-	-	57.4	2800 x 2200 x 9418
TCC12R18L-06	850	3.49	5.62	-	-	57.3	2800 x 2200 x 10550
TCC12R20L-06	900	3.48	5.64	-	-	56.9	2800 x 2200 x 11682

Regular Quiet - Dual Circuit - Air Cooled

Model No	Nominal Cooling (kW)	EER	ESEER	Free-cooling (kW)	Free Cooling EER	Sound Pressure @ 10m (dBA)	Dimensions H x W x L (mm)
Regular Quiet - Dual Circuit - Air Cooled							
TCC22R08S-14	470	3.51	4.89	-	-	56.6	2800 x 2200 x 4890
TCC22R10S-14	500	3.68	5.17	-	-	55.4	2800 x 2200 x 6022
TCC22R12S-14	530	3.77	5.44	-	-	55.4	2800 x 2200 x 7154
TCC22R14S-14	560	3.82	5.58	-	-	54.9	2800 x 2200 x 8286
TCC22R10L-15	600	3.33	4.51	-	-	58.9	2800 x 2200 x 6022
TCC22R12L-15	670	3.47	4.79	-	-	58.3	2800 x 2200 x 7154
TCC22R14L-15	750	3.50	4.98	-	-	58.1	2800 x 2200 x 8286
TCC22R16L-16	800	3.54	5.16	-	-	57.6	2800 x 2200 x 9418
TCC22R18L-16	850	3.50	5.29	-	-	57.3	2800 x 2200 x 10550
TCC22R20L-16	900	3.48	5.39	-	-	56.9	2800 x 2200 x 11682
TCC23R12S-17	630	3.58	5.33	-	-	57.3	2800 x 2200 x 7154
TCC23R14S-17	680	3.69	5.48	-	-	56.8	2800 x 2200 x 8286
TCC23R16S-17	730	3.77	5.56	-	-	56.3	2800 x 2200 x 9418
TCC23R18S-17	780	3.80	5.66	-	-	56.5	2800 x 2200 x 10550
TCC23R16L-19	840	3.39	5.16	-	-	59.1	2800 x 2200 x 9418
TCC23R18L-19	900	3.51	5.30	-	-	58.7	2800 x 2200 x 10550
TCC23R20L-20	960	3.59	5.38	-	-	58.3	2800 x 2200 x 11682
TCC23R22L-20	1020	3.64	5.44	-	-	58.1	2800 x 2200 x 12814
TCC23R24L-20	1080	3.67	5.50	-	-	57.8	2800 x 2200 x 13946
TCC24R16S-18	820	3.58	5.54	-	-	57.8	2800 x 2200 x 9418
TCC24R18S-18	860	3.68	5.64	-	-	57.2	2800 x 2200 x 10550
TCC24R20S-18	900	3.75	5.73	-	-	56.8	2800 x 2200 x 11682
TCC24R22S-18	950	3.80	5.78	-	-	56.4	2800 x 2200 x 12814
TCC24R24S-18	1000	3.84	5.82	-	-	56.1	2800 x 2200 x 13946
TCC24R20L-21	1040	3.33	5.35	-	-	59.9	2800 x 2200 x 11682
TCC24R22L-21	1100	3.42	5.42	-	-	59.6	2800 x 2200 x 12814
TCC24R24L-21	1160	3.51	5.48	-	-	59.3	2800 x 2200 x 13946

## Range Layout

## Extra Quiet - Single Circuit - Air Cooled

Model No	Nominal Cooling (kW)	EER	ESEER	Free-cooling (kW)	Free Cooling EER	Sound Pressure @ 10m (dBA)	Dimensions H x W x L (mm)
Extra Quiet - Single Circuit - Air Cooled							
TCC11X04S-01	200	3.48	5.12	-	-	52.4	2800 x 2200 x 2626
TCC11X06S-01	225	3.92	5.59	-	-	52.5	2800 x 2200 x 3758
TCC11X08S-01	235	4.14	5.93	-	-	51.8	2800 x 2200 x 4890
TCC11X06L-02	350	3.16	4.80	-	-	53.4	2800 x 2200 x 3758
TCC11X08L-03	385	3.49	5.28	-	-	53.4	2800 x 2200 x 4890
TCC11X10L-03	410	3.65	5.54	-	-	53.4	2800 x 2200 x 6022
TCC12X08S-04	430	3.44	5.47	-	-	54.9	2800 x 2200 x 4890
TCC12X10S-04	460	3.70	5.68	-	-	54.9	2800 x 2200 x 6022
TCC12X12S-04	490	3.86	5.84	-	-	54.8	2800 x 2200 x 7154
TCC12X14S-04	520	3.93	5.92	-	-	54.8	2800 x 2200 x 8286
TCC12X10L-05	560	3.14	5.28	-	-	55.8	2800 x 2200 x 6022
TCC12X12L-06	630	3.37	5.38	-	-	55.7	2800 x 2200 x 7154
TCC12X14L-06	710	3.46	5.51	-	-	55.6	2800 x 2200 x 8286
TCC12X16L-06	760	3.53	5.63	-	-	55.5	2800 x 2200 x 9418
TCC12X18L-06	810	3.56	5.69	-	-	55.5	2800 x 2200 x 10550
TCC12X20L-06	860	3.52	5.71	-	-	55.4	2800 x 2200 x 11682

## Extra Quiet - Dual Circuit - Air Cooled

Model No	Nominal Cooling (kW)	EER	ESEER	Free-cooling (kW)	Free Cooling EER	Sound Pressure @ 10m (dBA)	Dimensions H x W x L (mm)
Extra Quiet - Dual Circuit - Air Cooled							
TCC22X08S-14	430	3.44	4.84	-	-	53.9	2800 x 2200 x 4890
TCC22X10S-14	460	3.70	5.27	-	-	53.9	2800 x 2200 x 6022
TCC22X12S-14	490	3.86	5.45	-	-	53.9	2800 x 2200 x 7154
TCC22X14S-14	520	3.93	5.62	-	-	54.8	2800 x 2200 x 8286
TCC22X10L-15	560	3.15	4.45	-	-	56.1	2800 x 2200 x 6022
TCC22X12L-15	630	3.36	4.79	-	-	56.0	2800 x 2200 x 7154
TCC22X14L-15	710	3.45	4.97	-	-	55.9	2800 x 2200 x 8286
TCC22X16L-16	760	3.53	5.15	-	-	55.8	2800 x 2200 x 9418
TCC22X18L-16	810	3.57	5.30	-	-	55.8	2800 x 2200 x 10550
TCC22X20L-16	860	3.52	5.42	-	-	55.4	2800 x 2200 x 11682
TCC23X12S-17	590	3.50	5.37	-	-	55.6	2800 x 2200 x 7154
TCC23X14S-17	640	3.67	5.50	-	-	55.5	2800 x 2200 x 8286
TCC23X16S-17	690	3.78	5.59	-	-	55.4	2800 x 2200 x 9418
TCC23X18S-17	740	3.86	5.69	-	-	55.4	2800 x 2200 x 10550
TCC23X16L-19	780	3.28	5.20	-	-	57.2	2800 x 2200 x 9418
TCC23X18L-19	840	3.43	5.30	-	-	57.1	2800 x 2200 x 10550
TCC23X20L-20	900	3.54	5.40	-	-	57.0	2800 x 2200 x 11682
TCC23X22L-20	960	3.64	5.46	-	-	56.9	2800 x 2200 x 12814
TCC23X24L-20	1020	3.69	5.55	-	-	56.8	2800 x 2200 x 13946
TCC24X16S-18	790	3.49	5.43	-	-	56.0	2800 x 2200 x 9418
TCC24X18S-18	820	3.65	5.65	-	-	56.0	2800 x 2200 x 10550
TCC24X20S-18	860	3.75	5.75	-	-	55.9	2800 x 2200 x 11682
TCC24X22S-18	910	3.82	5.82	-	-	55.8	2800 x 2200 x 12814
TCC24X24S-18	960	3.86	5.86	-	-	55.7	2800 x 2200 x 13946
TCC24X20L-21	1000	3.16	5.38	-	-	58.1	2800 x 2200 x 11682
TCC24X22L-21	1040	3.33	5.46	-	-	58.0	2800 x 2200 x 12814
TCC24X24L-21	1080	3.43	5.53	-	-	57.9	2800 x 2200 x 13946

Range Layout

Regular Quiet - Single Circuit - Free Cooled

Model No	Nominal Cooling (kW)	EER	ESEER	Free-cooling (kW)	Free Cooling EER	Sound Pressure @ 10m (dBA)	Dimensions H x W x L (mm)
Regular Quiet - Single Circuit - FreeCool							
TCF11R06S-07	290	3.64	5.40	279.8	20.01	53.9	2800 x 2200 x 3758
TCF11R08S-07	300	3.86	5.75	335.8	18.01	52.5	2800 x 2200 x 4890
TCF11R06L-11	390	3.26	4.77	308.7	22.08	56.7	2800 x 2200 x 3758
TCF11R08L-08	425	3.37	5.08	386.2	20.72	56.2	2800 x 2200 x 4890
TCF11R10L-10	450	3.61	5.36	453.4	19.46	54.8	2800 x 2200 x 6022
TCF12R08S-09	470	3.36	5.17	399.4	21.42	57.5	2800 x 2200 x 4890
TCF12R10S-05	500	3.65	5.48	472.3	20.27	56.3	2800 x 2200 x 6022
TCF12R12S-05	530	3.78	5.60	540.0	19.31	55.6	2800 x 2200 x 7154
TCF12R14S-05	560	3.86	5.70	604.5	18.53	55.0	2800 x 2200 x 8286
TCF12R12L-12	670	3.44	5.20	589.2	21.07	58.3	2800 x 2200 x 7154
TCF12R14L-12	750	3.52	5.34	677.8	20.78	58.0	2800 x 2200 x 8286
TCF12R16L-12	800	3.58	5.42	755.7	20.27	57.5	2800 x 2200 x 9418
TCF12R18L-13	850	3.56	5.46	831.9	19.83	57.3	2800 x 2200 x 10550
TCF12R20L-13	900	3.56	5.46	906.9	19.46	56.9	2800 x 2200 x 11682

Regular Quiet - Dual Circuit - Free Cooled

Model No	Nominal Cooling (kW)	EER	ESEER	Free-cooling (kW)	Free Cooling EER	Sound Pressure @ 10m (dBA)	Dimensions H x W x L (mm)
Regular Quiet - Dual Circuit - FreeCool							
TCF22R10S-22	500	3.65	4.95	472.3	20.27	55.7	2800 x 2200 x 6022
TCF22R12S-22	530	3.77	5.29	540.0	19.31	55.6	2800 x 2200 x 7154
TCF22R14S-22	560	3.85	5.43	604.5	18.53	55.0	2800 x 2200 x 8286
TCF22R12L-23	670	3.48	4.63	589.2	21.07	58.5	2800 x 2200 x 7154
TCF22R14L-23	750	3.53	4.82	677.8	20.78	58.2	2800 x 2200 x 8286
TCF22R16L-23	800	3.59	4.99	755.7	20.27	57.7	2800 x 2200 x 9418
TCF22R18L-23	850	3.62	5.13	831.9	19.83	57.2	2800 x 2200 x 10550
TCF22R20L-23	900	3.63	5.24	906.9	19.46	56.8	2800 x 2200 x 11682
TCF23R12S-24	630	3.51	5.16	576.9	20.63	57.6	2800 x 2200 x 7154
TCF23R14S-24	680	3.63	5.32	654.0	20.05	57.1	2800 x 2200 x 8286
TCF23R16S-25	730	3.73	5.42	729.5	19.57	56.5	2800 x 2200 x 9418
TCF23R18S-25	780	3.79	5.42	803.8	19.16	56.7	2800 x 2200 x 10550
TCF23R18L-28	900	3.47	5.13	850.1	20.27	58.9	2800 x 2200 x 10550
TCF23R20L-28	960	3.57	5.25	930.1	19.96	58.5	2800 x 2200 x 11682
TCF23R22L-28	1020	3.64	5.31	1009.5	19.69	58.2	2800 x 2200 x 12814
TCF23R24L-28	1080	3.70	5.37	1088.3	19.46	57.9	2800 x 2200 x 13946
TCF24R16S-26	820	3.52	5.38	762.5	20.45	58.0	2800 x 2200 x 9418
TCF24R18S-26	860	3.63	5.48	835.6	19.92	57.5	2800 x 2200 x 10550
TCF24R20S-26	900	3.72	5.57	906.9	19.46	57.0	2800 x 2200 x 11682
TCF24R22S-27	950	3.78	5.63	981.0	19.14	56.7	2800 x 2200 x 12814
TCF24R24S-27	1000	3.84	5.67	1054.4	18.85	56.3	2800 x 2200 x 13946
TCF24R22L-21	1100	3.34	5.26	1039.0	20.27	59.9	2800 x 2200 x 12814
TCF24R24L-21	1160	3.44	5.33	1119.1	20.01	59.5	2800 x 2200 x 13946



**Range Layout**

**Extra Quiet - Single Circuit - Free Cooled**

Model No	Nominal Cooling (kW)	EER	ESEER	Free-cooling (kW)	Free Cooling EER	Sound Pressure @ 10m (dBA)	Dimensions H x W x L (mm)
Extra Quiet - Single Circuit - FreeCool							
TCF11X06S-07	250	3.79	5.37	223.5	45.63	52.4	2800 x 2200 x 3758
TCF11X08S-07	260	4.06	5.79	274.8	42.07	52.3	2800 x 2200 x 4890
TCF11X06L-11	350	3.09	4.63	245.2	50.04	53.3	2800 x 2200 x 3758
TCF11X08L-08	385	3.41	5.06	311.0	47.62	53.2	2800 x 2200 x 4890
TCF11X10L-10	410	3.73	5.39	370.7	45.40	53.2	2800 x 2200 x 6022
TCF12X08S-09	430	3.23	5.19	324.1	49.61	54.8	2800 x 2200 x 4890
TCF12X10S-05	460	3.62	5.51	388.5	47.59	54.7	2800 x 2200 x 6022
TCF12X12S-05	490	3.82	5.64	449.8	45.91	54.7	2800 x 2200 x 7154
TCF12X14S-05	520	3.93	5.75	509.0	44.53	54.6	2800 x 2200 x 8286
TCF12X12L-12	630	3.25	5.22	477.7	48.76	55.6	2800 x 2200 x 7154
TCF12X14L-12	710	3.39	5.36	552.3	48.31	55.5	2800 x 2200 x 8286
TCF12X16L-12	760	3.53	5.48	619.8	47.44	55.4	2800 x 2200 x 9418
TCF12X18L-13	810	3.56	5.52	686.4	46.71	55.3	2800 x 2200 x 10550
TCF12X20L-13	860	3.57	5.55	752.3	46.07	55.2	2800 x 2200 x 11682

**Extra Quiet - Dual Circuit - Free Cooled**

Model No	Nominal Cooling (kW)	EER	ESEER	Free-cooling (kW)	Free Cooling EER	Sound Pressure @ 10m (dBA)	Dimensions H x W x L (mm)
Extra Quiet - Dual Circuit - FreeCool							
TCF22X10S-22	460	3.61	4.92	383.8	47.01	53.7	2800 x 2200 x 6022
TCF22X12S-22	490	3.81	5.28	444.2	45.34	53.7	2800 x 2200 x 7154
TCF22X14S-22	520	3.93	5.47	502.8	43.99	54.6	2800 x 2200 x 8286
TCF22X12L-23	630	3.29	4.62	477.7	48.76	55.9	2800 x 2200 x 7154
TCF22X14L-23	710	3.38	4.81	552.3	48.31	55.8	2800 x 2200 x 8286
TCF22X16L-23	760	3.54	4.99	619.8	47.44	55.7	2800 x 2200 x 9418
TCF22X18L-23	810	3.59	5.14	686.4	46.71	55.6	2800 x 2200 x 10550
TCF22X20L-23	860	3.53	5.26	752.3	46.07	55.2	2800 x 2200 x 11682
TCF23X12S-24	590	3.39	5.18	469.4	47.91	55.4	2800 x 2200 x 7154
TCF23X14S-24	640	3.57	5.33	536.4	46.92	55.4	2800 x 2200 x 8286
TCF23X16S-25	690	3.70	5.44	602.4	46.11	55.3	2800 x 2200 x 9418
TCF23X18S-25	740	3.81	5.54	667.8	45.44	55.2	2800 x 2200 x 10550
TCF23X18L-28	840	3.32	5.12	693.7	47.20	57.0	2800 x 2200 x 10550
TCF23X20L-28	900	3.46	5.25	762.7	46.71	56.8	2800 x 2200 x 11682
TCF23X22L-28	960	3.58	5.31	831.3	46.28	56.7	2800 x 2200 x 12814
TCF23X24L-28	1020	3.67	5.40	899.6	45.91	56.6	2800 x 2200 x 13946
TCF24X16S-26	790	3.38	5.29	626.6	47.96	55.9	2800 x 2200 x 9418
TCF24X18S-26	820	3.55	5.50	688.9	46.87	55.8	2800 x 2200 x 10550
TCF24X20S-26	860	3.67	5.59	752.3	46.07	55.7	2800 x 2200 x 11682
TCF24X22S-27	910	3.77	5.66	817.7	45.53	55.6	2800 x 2200 x 12814
TCF24X24S-27	960	3.83	5.71	882.7	45.05	55.5	2800 x 2200 x 13946
TCF24X22L-21	1040	3.19	5.29	851.1	47.38	57.9	2800 x 2200 x 12814
TCF24X24L-21	1080	3.31	5.37	915.2	46.71	57.8	2800 x 2200 x 13946

Unit Overview

**Air**

- AC Compressor
- EC Compressor
- High Air Flow EC Compressor
- Fan Discharge
- Exhaust Fan Discharge

**ETP**

- Signal Input
- Up Panel
- Control Panel
- Power
- Emergency Stop
- Power
- Rain Hood


**Ch**

- Microprocessor
- Leak Detection
- Intelligent Head Pressure Control



Coils

- Expansion Coils
- RTPF FreeCooling Coils

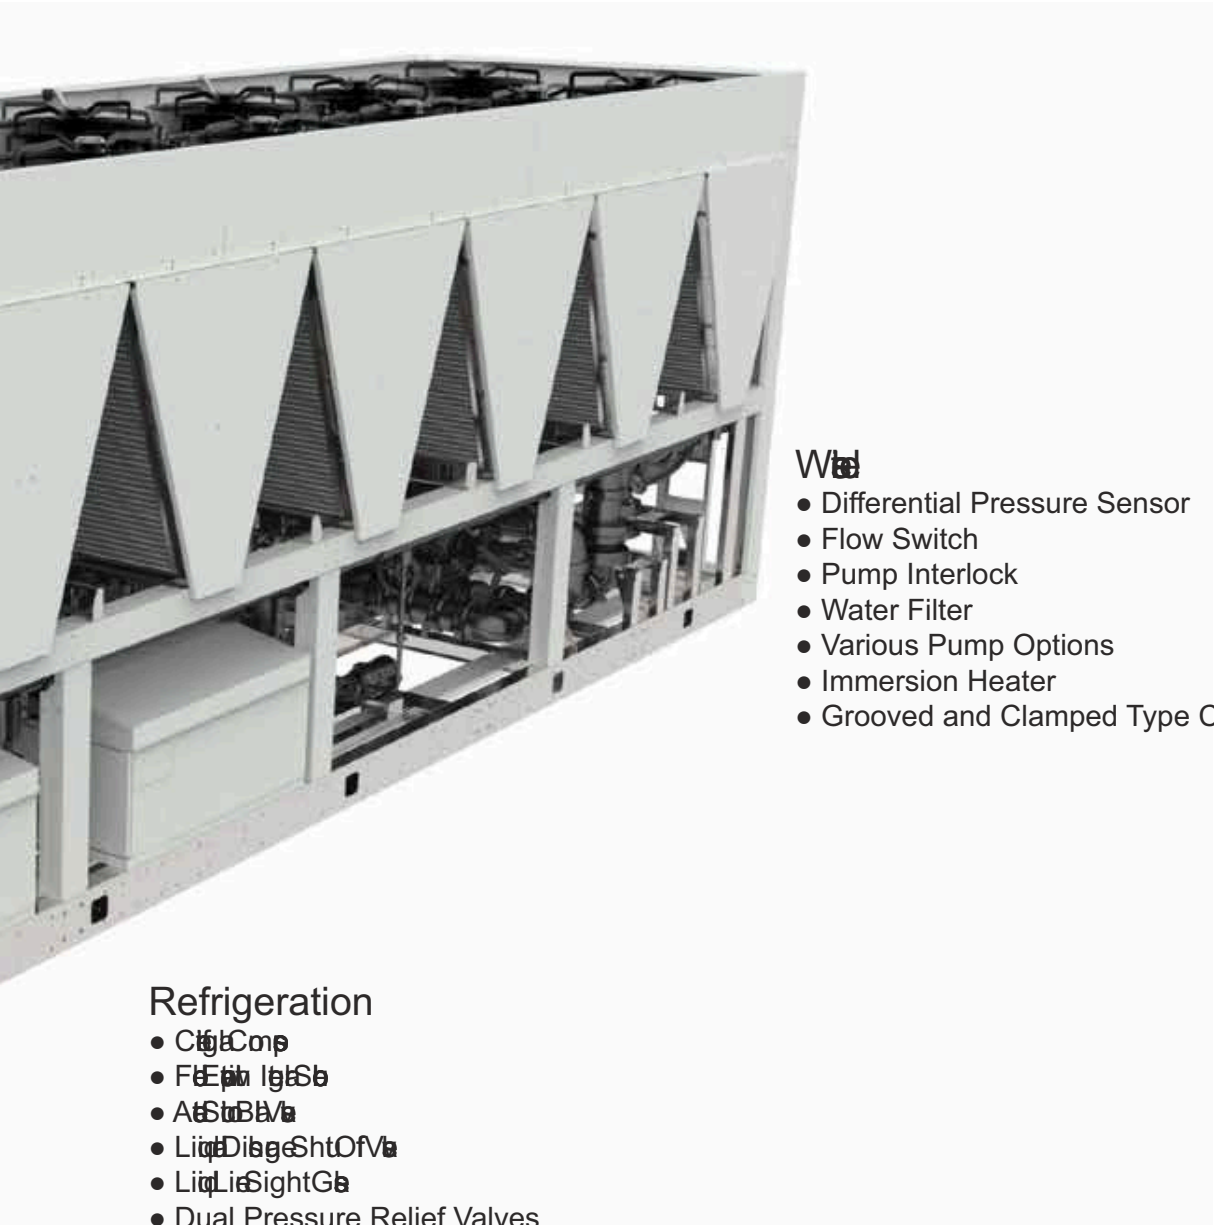

Water

- Differential Pressure Sensor
- Flow Switch
- Pump Interlock
- Water Filter
- Various Pump Options
- Immersion Heater
- Grooved and Clamped Type Connections

Refrigeration

- Compressor
- Expansion Valve
- Accumulator
- Liquid Sight Glass
- Liquid Sight Glass
- Dual Pressure Relief Valves
- Microleak Detector

## Unit Components

### Refrigeration

Refrigeration	TCC	TCF
Compressors - Turbocor Centrifugal	●	●
Dual Maintainable Pressure Relief Valves	●	●
Microchannel Epoxy Coated Condensing Coils	●	●
RTPF Free Cooling Coils	-	●
Epoxy Coated RTPF Free Cooling Coils	-	○
Actuated Starting Line Assembly	●	●
Filter Driers with Replaceable Cores	●	●
Electronic Expansion Valves	●	●
Flooded Evaporator with integral subcooler	●	●
Stainless Steel Suction Pipe Assembly	●	●
Full Operating Charge of R134a	●	●
Acoustically Lined Compressor Enclosure(s)	●	●
Liquid and Discharge Shut Off Valves	●	●
Liquid Line Sight Glasses (integral to EEV)	●	●
Micro-Plate Economiser	○	○
Actuated Suction Ball Valve(s)*	○	○
Liquid level control valve (LLCV)	●	●
Full operating charge of R134a	●	●
Large capacity filter drier(s) with replaceable cores	●	●
Liquid line sight glasses	●	●
Low pressure switch with auto reset	●	●
2 High pressure switches with manual reset per compressor	●	●
High ambient starting valves	●	●
Suction and liquid pressure transducers	●	●
Discharge check (non return) valve(s)	●	●

● Standard features      ○ Optional features      - Feature not available

#### CAUTION

\* Feature required if unit is to be shut down for winter with water still circulating through unit. Freeze protection. This is to stop potential liquid migration.

### Evaporator

Flooded evaporator incorporating an internal round tube plate fin heat exchanger. This heat exchanger is used to further sub-cool refrigerant leaving the condenser extending the potential cooling capacity and as a result, efficiency of the system. At the same time suction gas vapour that passes over the heat exchanger within the shell is superheated to a higher temperature, eliminating the risk of wet vapour returning to the compressor.

The heat exchanger is insulated with closed cell polyurethane foam which is to Class O fire rating and the material is UV resistant.

The flooded evaporator results in significant energy savings in compressor operation particularly at part load.

Two immersion heater(s) and thermostat protect the evaporator against freeze up in ambient temperatures down to -20°C. (in compliance with Airedale freeze protection policy).

Connections for External Trace Heating (230V / 500W available).

Compressors and evaporator shall be mounted on a rigid galvanised heavy duty sub frame. Fully weatherproofed electrical panels are situated at one end of the unit.



### Actuated Suction Ball Valve(s)

To protect the compressors against liquid migration, actuated suction line ball valves shall be fitted. This protects the compressors when there is no cooling demand by keeping the refrigerant in the evaporator, even if water is still flowing through the unit.


### Economiser Circuit for Increased Part Load Efficiency

The addition of an economiser circuit provides increased cooling and enhances EER, in full and part load operation.

Sub cooled liquid is expanded using a dedicated EEV (electronic expansion valve) to medium pressure and passed through one side of a plate heat exchanger.

Through the other side flows the 'normal' pressure liquid.

The result is that the sub cooling of the liquid entering the system EEV is increased, which improves evaporator performance and at the same time the suction pressure within the compressor body is lifted, improving compressor efficiency.

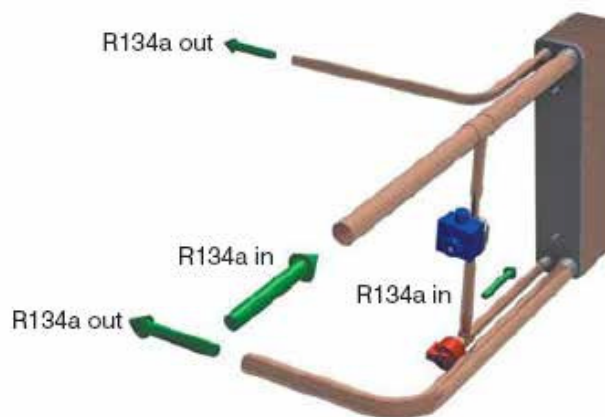




**Turbocor Compressor**

Turbocor centrifugal compressor supplied with as standard:

- Suction and discharge shut off valves
- Discharge non-return valve
- Line reactor (for removing additional impedance harmonics and voltage spikes in the ac waveform)
- EMI/EMC filter and comprising of:
  - o AC-DC rectifier
  - o DC capacitors
  - o DC-AC (IGBT) converter
  - o Motor/bearing management system and incorporated surge protection
  - o Soft start module
  - o Magnetic bearing system
  - o The compressors are mounted on TurboChill specially designed vibration reducing isolating rubber mounts
  - o Linear capacity modulation is provided by a variable frequency drive

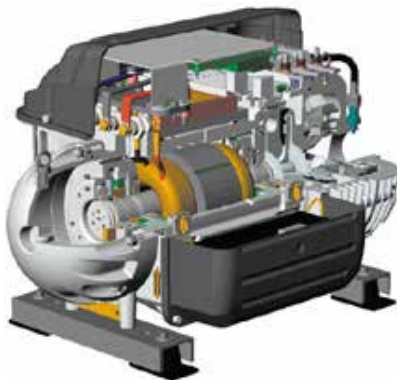

Key benefits of Turbocor compressor technology:

- Oil Free Operation
- More efficient use of heat exchangers
- No oil entrainment issues – pipe work can be optimised for performance not oil return
- Variable speed operation offering exact capacity match and optimum part load performance
- Magnetic bearing system constantly optimises shaft / impeller position
- Small and light, only 120kg or 132kg (compressor size dependant)
- No mechanical contact, very quiet operation
- Very low start current, only 2A
- The intelligent, self optimising compressor offers near silent, oil free operation and ultra efficient variable speed control
- Turbocor compressor shaft and impellers levitate on a magnetic cushion eliminating friction and vibration resulting in the compressor running at a smooth and reduced sound spectrum
- The TurboChill compressor's variable speed control offers 2 major benefits:
  - o Uses substantially less power at part load and gives accurate set-point control and exact capacity match
  - o The inbuilt electronic soft start produces a very low starting current of just 2A and eradicates the need to oversize electrical supply components on site

**Condenser**

Large surface area microchannel coil(s) (ideally positioned to optimise airflow and heat transfer) shall be manufactured as a “V-block” arrangement. This “V-block” arrangement has a lower airside pressure drop making the fans run more efficiently. The coils have freeflowing liquid drains that enable us to reduce the amount of subcooling done in the coil, leaving more area for heat exchange.

**R134a Leak Detection System**

A factory calibrated leak detection system shall be fitted as standard to units containing circuits carrying > 300kg / circuit of refrigerant to comply with F-gas legislation, however the leak detection system can be supplied as an optional extra with refrigerant charges <300kg.

A dedicated refrigerant sensor shall be fitted within each compressor enclosure and will raise an alarm on detection of refrigerant gas.

**Maintainable Dual Pressure Relief Valve**

An auto resetting pressure relief valve assembly shall be provided per evaporator circuit, opening on pressure rise above 10.3 barg. The dual shut-off valve assembly incorporates 2 pressure relief valves which can be individually shut off via a 3 way valve. This allows the maintenance of individual pressure relief valves without any requirement for refrigerant evacuation.

Rupture discs are also fitted on systems with a refrigerant charge larger than 300kg in line with EN 378-2:2008+A2:2012 clause 6.2.6.5.

In accordance with EN13136:2013, pressure relief valves have been sized to ensure that in the event of fire they can prevent excessive build-up of pressure within the evaporator. EN13136:2013 section 6.2.1 has been used to size valves accordingly.

Fire is a hazard that these units have not been designed to operate under. However, the inclusion of various safety devices ensures that any damage due to fire is limited via the release of pressure in the form of gas discharge.

If concerns of the ability of the pressure relief valve to discharge in the event of a fire >107°C exist, then it is the responsibility of the end user to protect the pressure relief valve assembly from excessive external temperatures.

This must however allow the pressure relief valve to discharge effectively and not act as a ‘choke’ (offer any resistance) when discharging.



Electrical



Controls and Electrical	TCC	TCF
Leak detection on circuits containing >300kg of refrigerant	●	●
Intelligent head pressure control	●	●
Actuated suction shut off valve	○	○
Power monitoring	○	○
Individual mains power isolator for each compressor	●	●
Separate electrical isolation for fans	●	●
Single point isolation for 3 connection of incoming 3-phase and earth mains power supply	●	●
Emergency Stop fitted to controls compartment door	●	●
Circuit breakers for protection of all major unit components	●	●
Phase rotation relay incorporating phase loss protection	●	●
Mains power loss emergency shutdown via ultracap	●	●

● Standard features    ○ Optional features    — Feature not available



### 3 Phase Single Point Isolaton

Single point isolation shall be fitted as a standard feature.



### Ultracap Power Backup


The Ultracap module is a standard feature utilising the latest Ultra Capacitor technology in external backup device for the EVD Evolution drivers and pCO controllers. The module guarantees temporary power to the controller and drivers in the event of mains power failures. The Ultra Capacitors are used to maintain the controller's main functions, to close the electronic valves in the event of mains power failures. This avoids the need to install a solenoid valve in the refrigerant circuit or use the battery backup module and allows the system to resume control as soon as mains or backup power returns to the unit.

### Energy Manager

Analysis of system energy consumption can be monitored via a dedicated LCD display. Unit parameters can be adjusted via the unit microprocessor control to affect energy usage in line with the system need.

### Mains Cable Entry

The unit mains cable can enter from either side of the electrical control panel.

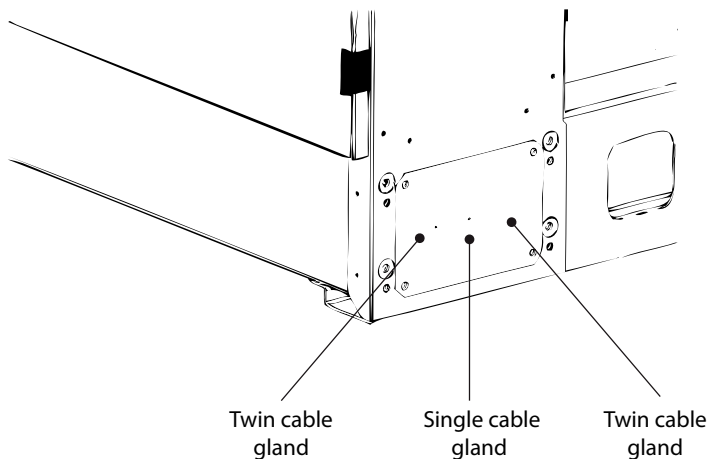

### Maximum Cable Gland Sizes

Single 1 x M75S

Twin 2 x M63S

### Control Panel Light

A control panel light shall be fitted to enable control panel maintenance to be carried out during poor light conditions.

### Maintenance Socket

A single phase maintenance socket (RCD protected) is available located within the control panel. This socket enables UK plugs to be connected.



Condenser Fans



Fans	TCC	TCF
800 mm diameter AC axial fans	●	●
800 mm diameter EC axial fans	○	○
800 mm diameter high airflow EC fans	○	○

● Standard features    ○ Optional features    — Feature not available

\* High airflow EC fans are not available with the X type units.

**Condenser Fan and Motor - AC**

Axial fan assemblies with finger proof grille and incorporating external rotor AC motor technology, capable of highly accurate discreet speed control., Discharges air vertically. The fans offer maximum performance whilst keeping sound levels to a minimum.

**Energy saving Electronically Commutated (EC) Fan Motor**

Each 800 mm diameter fan incorporates on board electronics with AC / DC conversion and inverter driven DC motor control to offer unparalleled high efficiency levels combined with smooth step-less speed control and quiet operation.



Sickle blades reduce air turbulence to minimise sound levels and power consumption whilst maximising performance.

The long bell mouth design provides improved aerodynamics, up to 10% more air movement, and an extended vertical throw of air to reduce the chance of air re-circulation. As standard the enclosure is complete with an integral finger proof grille.


The fans offer maximum airflow performance while keeping sound levels to a minimum.

A mains EMC filter is fitted when the EC fan option is selected with the unit. The filter is designed for convenient mains connection within the bus bar chamber.

The in built EC fan control module allows for fan speed modulation from 15-100%, a standard AC fans modulating range is typically 40-100% of full fan speed.

The EC fan presents superior energy efficiency at full and reduced fan speed compared to the equivalent AC fan motor, offering efficiency savings anywhere between 30 to 100% compared with an AC fan.

Fan speeds are factory set depending on sound level variant. Standard voltage regulated (VR) fan speed controllers offer a linear response. By comparison the EC fan is adjusted on demand via the unit microprocessor with precision, offering substantial energy savings. The following illustration shows a comparison of the typical power input required by each method.

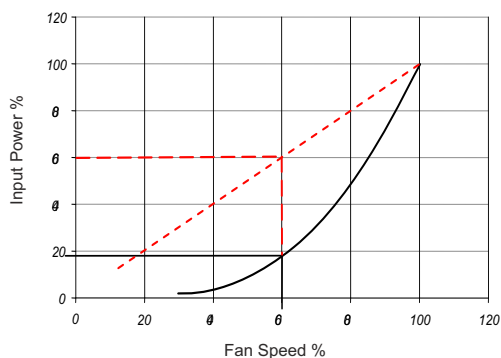


Fan speed of 60%  
 Voltage regulated input power required 60%  
 EC input power required 18%

— EC (Electronically Commutated) Fan Speed Control  
 - - - Voltage Regulated Fan Speed Control



Waterside

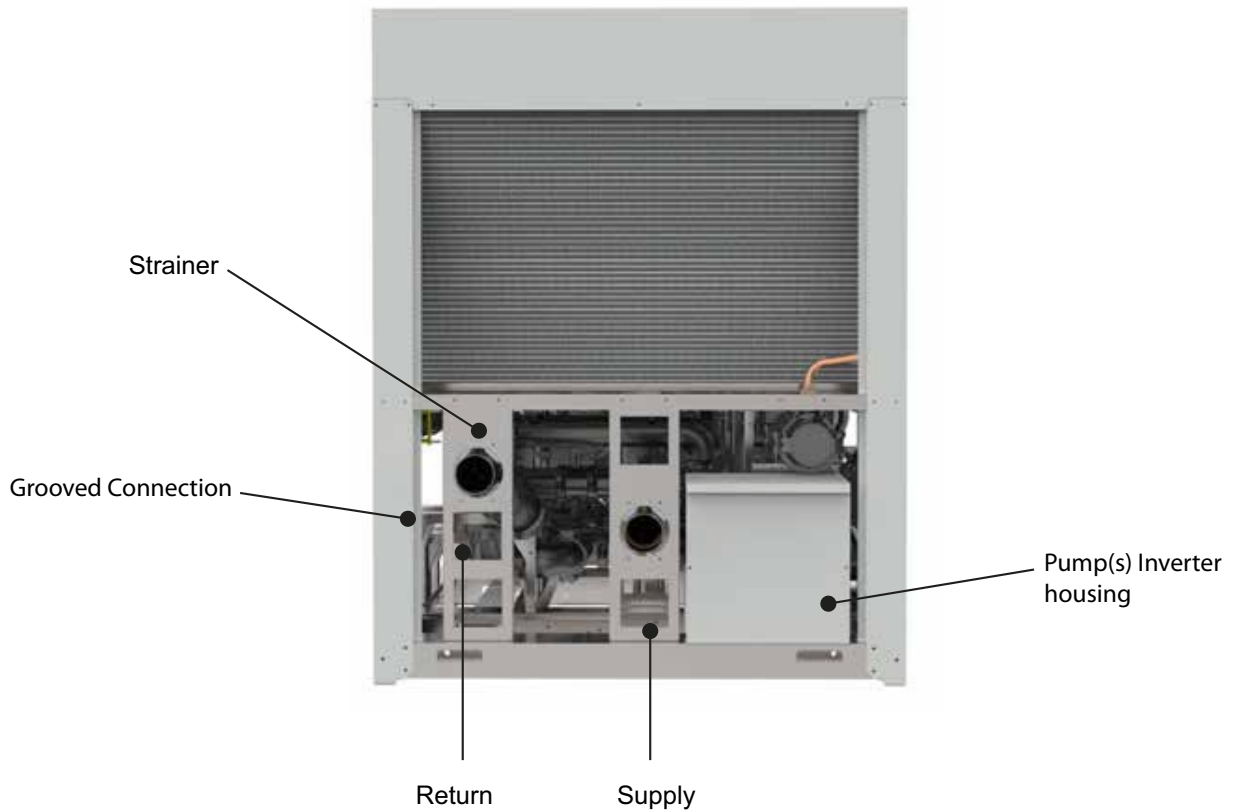

Waterside	TCC	TCF
Free Cooling Coil	—	●
Evaporator Immersion Heaters	●	●
Water filter**	○	●
Pump hydronic options**	○	○
Water flow meter	○	○
Grooved and clamped type connections	●	●
Flanged connections	○	○
Pump vibration eliminators	●	●
Pump interlock*	○	○
Flow switch*	○	○
Differential pressure transducer*	●	●

● Standard features    ○ Optional features    — Feature not available

**\* CAUTION**  
Each feature is a flow proving device, and 2 out of the 3 should be fitted to any unit to validate warranty.

\*\* Pump options only available on units with sufficient space.

**Free Cooling Coil**

A free cooling coil constructed in a “V” frame arrangement, allowing for efficient heat transfer from the ambient air temperature to the cooling process.

The free cooling coil is manufactured from copper tube and aluminium fin.

Free cooling is initiated whenever the outdoor ambient temperature is 2°C less than the return water temperature.

The “V” frame arrangement enables efficient concurrent cooling.

The TurboChill free cool chiller’s pipe work has been designed to optimise pressure drop, reducing pump input power. It shall be fitted with a water drain valve (schrader point located at lowest point of coils) for maintenance purposes.

**Flow Proving Device**

An evaporator differential pressure sensor facilitates low flow limiting and pressure drop monitoring via the microprocessor which shall be fitted to ensure correct unit water flow.

**Water Flow Meter**

A water flow meter shall be fitted to the unit to monitor water flowrates.

**Grooved and Clamp Type Connections**

Grooved and clamp type connections shall be fitted to the unit.

**Flanged Connections**

Flanged connections shall be fitted to the unit upon request. Please contact Airedale.

**Pump Interlock\***

Provision for a pump interlock is available within the control panel.

**Water Flow Switch\***

If selected. A water flow switch is fitted ensuring integrity of the cooling solution flow.

The flow switch shall protect the Chiller against low water flow conditions.

Despatched loose for on site fitment. A 1” BSP socket is required for this fitment.

**\* CAUTION**

Each feature is a flow proving device and 2 out of the 3 should be fitted to any unit to validate warranty.

**Pump Vibration Eliminator**

Flexible couplings shall be fitted to the pumps to reduce any vibration through the system pipework.

**Pump Options**

A variety of pump options to suit a wide range of applications are available:

Factory fitted in line as a single pump or run / standby configuration and available in standard and larger nominal external head pressures.

Factory fitted run/standby pumps have a shut off valve to the inlet and a non return valve to the outlet, enabling one pump to be maintained without interrupting Chiller flow. Supplied with electrical switchgear and isolating valve as standard.

Run / standby pumps are rotated automatically to ensure even pump usage and prolong component life.

**Pump - AC Motor - Fixed Speed**

A factory fitted in line single or run / standby pump is available with various pump external head options; please specify at order.

Flow can be proven via the microprocessor display.

Factory fitted and supplied as standard complete with:

- Differential pressure sensor
- Isolating valves
- Inlet strainer
- Vibration isolation
- Electrical switch gear

**Pump - Inverter Driven - Variable Speed**

A factory fitted in line single or run / standby pump is available with various pump external head options; please specify at order.

Flow is varied via an electronic flow meter, depending on system requirements. Adjustment and monitoring is via the microprocessor display.

Factory fitted and supplied as standard complete with:

- Differential pressure sensor
- Isolating valves
- Inlet strainer
- Vibration isolation
- Electrical switch gear
- Inverter panel with ventilation fan and panel heater (high / low ambient operation)

**Waterside Options**

**Air Cooled**

		EVAPORATOR ONLY	EXTENDED PIPEWORK	NO BYPASS (FILTER + SOV)	BYPASS (FILTER + SOV)	SINGLE PUMP	RUN AND STANDBY
AIR COOLED UNITS	TCC11R04S-01	●	-	-	-	-	-
	TCC11R06S-01	●	●	○	-	-	-
	TCC11R08S-01	●	●	●	●	●	●
	TCC12R08S-04	●	●	○	-	-	-
	TCC12R10S-04	●	●	●	●	●	●
	TCC12R12S-04	●	●	●	●	●	●
	TCC12R14S-04	●	●	●	●	●	●
	TCC11R06L-02	●	●	○	-	-	-
	TCC11R08L-03	●	●	○	-	-	-
	TCC11R10L-03	●	●	●	●	●	●
	TCC12R10L-05	●	●	●	●	-	-
	TCC12R12L-06	●	●	●	●	●	●
	TCC12R14L-6	●	●	●	●	●	●
	TCC12R16L-06	●	●	●	●	●	●
	TCC12R18L-06	●	●	●	●	●	●
	TCC12R20L-06	●	●	●	●	●	●
	TCC22R08S-14	●	●	○	-	-	-
	TCC22R10S-14	●	●	●	●	●	●
	TCC22R12S-14	●	●	●	●	●	●
	TCC22R14S-14	●	●	●	●	●	●
	TCC22R10L-15	●	●	●	●	-	-
	TCC22R12L-15	●	●	●	●	●	●
	TCC22R14L-15	●	●	●	●	●	●
	TCC22R16L-16	●	●	●	●	●	●
	TCC22R18L-16	●	●	●	●	●	●
	TCC22R20L-16	●	●	●	●	●	●
	TCC23R12S-17	●	●	●	●	-	-
	TCC23R14S-17	●	●	●	●	●	●
	TCC23R16S-17	●	●	●	●	●	●
	TCC23R18S-17	●	●	●	●	●	●
	TCC23R16L-19	●	●	●	●	●	●
	TCC23R18L-19	●	●	●	●	●	●
	TCC23R20L-20	●	●	●	●	●	●
	TCC23R22L-20	●	●	●	●	●	●
	TCC23R24L-20	●	●	●	●	●	●
	TCC24R16S-18	●	●	●	●	-	-
	TCC24R18S-18	●	●	●	●	●	●
	TCC24R20S-18	●	●	●	●	●	●
	TCC24R22S-18	●	●	●	●	●	●
	TCC24R24S-18	●	●	●	●	●	●
	TCC24R20L-21	●	●	●	●	●	●
	TCC24R22L-21	●	●	●	●	●	●
TCC24R24L-21	●	●	●	●	●	●	

- Waterside + internal strainer
- Waterside + external strainer (supplied loose)
- Not available

Waterside Options

Air Cooled

ibto

		EVAPORATOR ONLY	EXTENDED PIPEWORK	NO BYPASS (FILTER + SOV)	BYPASS (FILTER + SOV)	SINGLE PUMP	RUN AND STANDBY
AIR COOLED UNITS	TCC11X04S-01	•	-	-	-	-	-
	TCC11X06S-01	•	•	•	•	-	-
	TCC11X08S-01	•	•	•	•	•	•
	TCC11X06L-02	•	•	•	-	-	-
	TCC11X08L-03	•	•	•	-	-	-
	TCC11X10L-03	•	•	•	•	•	•
	TCC12X08S-04	•	•	•	-	-	-
	TCC12X10S-04	•	•	•	•	•	•
	TCC12X12S-04	•	•	•	•	•	•
	TCC12X14S-04	•	•	•	•	•	•
	TCC12X10L-05	•	•	•	•	N	N
	TCC12X12L-06	•	•	•	•	•	•
	TCC12X14L-06	•	•	•	•	•	•
	TCC12X16L-06	•	•	•	•	•	•
	TCC12X18L-06	•	•	•	•	•	•
	TCC12X20L-06	•	•	•	•	•	•
	TCC22X08S-14	•	•	•	-	-	-
	TCC22X10S-14	•	•	•	•	•	•
	TCC22X12S-14	•	•	•	•	•	•
	TCC22X14S-14	•	•	•	•	•	•
	TCC22X10L-15	•	•	•	•	-	-
	TCC22X12L-15	•	•	•	•	•	•
	TCC22X14L-15	•	•	•	•	•	•
	TCC22X16L-16	•	•	•	•	•	•
	TCC22X18L-16	•	•	•	•	•	•
	TCC22X20L-16	•	•	•	•	•	•
	TCC23X12S-17	•	•	-	-	-	-
	TCC23X14S-17	•	•	•	•	Y	Y
	TCC23X16S-17	•	•	•	•	Y	Y
	TCC23X18S-17	•	•	•	•	Y	Y
	TCC23X16L-19	•	•	•	•	•	•
	TCC23X18L-19	•	•	•	•	•	•
	TCC23X20L-20	•	•	•	•	•	•
	TCC23X22L-20	•	•	•	•	•	•
	TCC23X24L-20	•	•	•	•	•	•
	TCC24X16S-18	•	•	○	○	-	-
	TCC24X18S-18	•	•	•	•	•	•
	TCC24X20S-18	•	•	•	•	•	•
	TCC24X22S-18	•	•	•	•	•	•
	TCC24X24S-18	•	•	•	•	•	•
TCC24X20L-21	•	•	•	•	•	•	
TCC24X22L-21	•	•	•	•	•	•	
TCC24X24L-21	•	•	•	•	•	•	

- Waterside + internal strainer
- Waterside + external strainer (supplied loose)
- Not available



**Waterside Options**

**Free Cooled**

		NO BYPASS (FILTER + SOV)	BYPASS (FILTER + SOV)	SINGLE PUMP	RUN AND STANDBY
FREE COOLED UNITS	TCF11R06S-07	○	○	-	-
	TCF11R08S-07	●	●	●	●
	TCF12R08S-09	○	-	-	-
	TCF12R10S-05	○	○	-	-
	TCF12R12S-05	●	●	●	●
	TCF12R14S-05	●	●	●	●
	TCF11R06L-11	○	-	-	-
	TCF11R08L-08	○	-	-	-
	TCF11R10L-10	○	○	-	-
	TCF12R12L-12	●	●	●	●
	TCF12R14L-12	●	●	●	●
	TCF12R16L-12	●	●	●	●
	TCF12R18L-13	●	●	●	●
	TCF12R20L-13	●	●	●	●
	TCF22R10S-22	●	●	-	-
	TCF22R12S-22	●	●	●	●
	TCF22R14S-22	●	●	●	●
	TCF22R12L-23	●	●	●	●
	TCF22R14L-23	●	●	●	●
	TCF22R16L-23	●	●	●	●
	TCF22R18L-23	●	●	●	●
	TCF22R20L-23	●	●	●	●
	TCF23R12S-24	●	●	-	-
	TCF23R14S-24	●	●	●	●
	TCF23R16S-25	●	●	●	●
	TCF23R18S-25	●	●	●	●
	TCF23R18L-28	●	●	●	●
	TCF23R20L-28	●	●	●	●
	TCF23R22L-28	●	●	●	●
	TCF23R24L-28	●	●	●	●
	TCF24R16S-26	●	●	-	-
	TCF24R18S-26	●	●	●	●
	TCF24R20S-26	●	●	●	●
	TCF24R22S-27	●	●	●	●
	TCF24R24S-27	●	●	●	●
TCF24R22L-21	●	●	●	●	
TCF24R24L-21	●	●	●	●	

- Waterside + internal strainer
- Waterside + external strainer (supplied loose)
- Not available

Waterside Options

Free Cooled

ibto

		NO BYPASS (FILTER + SOV)	BYPASS (FILTER + SOV)	SINGLE PUMP	RUN AND STANDBY
FREE COOLED UNITS	TCF11X06S-07	-	-	-	-
	TCF11X08S-07	o	o	o	o
	TCF11X06L-11	o	-	-	-
	TCF11X08L-08	o	-	-	-
	TCF11X10L-10	o	-	-	-
	TCF12X08S-09	o	-	-	-
	TCF12X10S-05	o	o	-	-
	TCF12X12S-05	•	•	•	•
	TCF12X14S-05	•	•	•	•
	TCF12X12L-12	•	•	•	•
	TCF12X14L-12	•	•	•	•
	TCF12X16L-12	•	•	•	•
	TCF12X18L-13	•	•	•	•
	TCF12X20L-13	•	•	•	•
	TCF22X10S-22	•	•	o	o
	TCF22X12S-22	•	•	•	•
	TCF22X14S-22	•	•	•	•
	TCF22X12L-23	•	•	•	•
	TCF22X14L-23	•	•	•	•
	TCF22X16L-23	•	•	•	•
	TCF22X18L-23	•	•	•	•
	TCF22X20L-23	•	•	•	•
	TCF23X12S-24	•	•	-	-
	TCF23X14S-24	•	•	•	•
	TCF23X16S-25	•	•	•	•
	TCF23X18S-25	•	•	•	•
	TCF23X18L-28	•	•	•	•
	TCF23X20L-28	•	•	•	•
	TCF23X22L-28	•	•	•	•
	TCF23X24L-28	•	•	•	•
	TCF24X16S-26	•	•	-	-
	TCF24X18S-26	•	•	•	•
	TCF24X20S-26	•	•	•	•
	TCF24X22S-27	•	•	•	•
	TCF24X24S-27	•	•	•	•
	TCF24X22L-21	•	•	•	•
TCF24X24L-21	•	•	•	•	

- Waterside + internal strainer
- o Waterside + external strainer (supplied loose)
- Not available

**Water Connections**

Water inlet and outlet connections shall be of a grooved and clamped type construction. Optional flanged connections shall be available on request, please consult Airedale.

**Water connection to evaporator only (air cooled only)**

Water inlet and outlet connections shall terminate directly on the evaporator.

**Extended Water Connections (air cooled only)**

Extended water connections shall be available on all air cooled units, it allows the water connections to terminate at the end of the unit.

**Water Filter**

A 20 mesh water filter can be supplied fitted to protect the evaporator from clogging by sediment. On certain models the filter is fitted externally.

**Bypass Options****No bypass**

Comprises

- Shut off valves
- Filter

**Flushing bypass kit (standard)**

Comprises:

- Shut off valves
- Filter
- Bypass leg with shut off valve

**Flushing bypass kit (regulating)**

Comprises:

- Shut off valves
- Filter
- Bypass leg with Double regulating valve

**Pump Configurations****Single pump + filter + bypass (flushing)**

Comprises:

- Single pump with vibration isolation
- Shut off valves
- Filter
- Bypass leg

**Single pump + filter + bypass (regulating)**

Comprises:

- Single pump with vibration isolation
- Shut off valves
- Filter
- Double regulating valves

**Run & standby pumps + filter + bypass (flushing)**


Comprises:

- Run and standby pumps with vibration isolation
- Shut off valves
- Filter
- Non return valves

**Run & standby pumps + filter + bypass (regulating)**

Comprises:

- Run and standby pumps with vibration isolation
- Shut off valves
- Filter
- Double regulating valve
- Non return valve

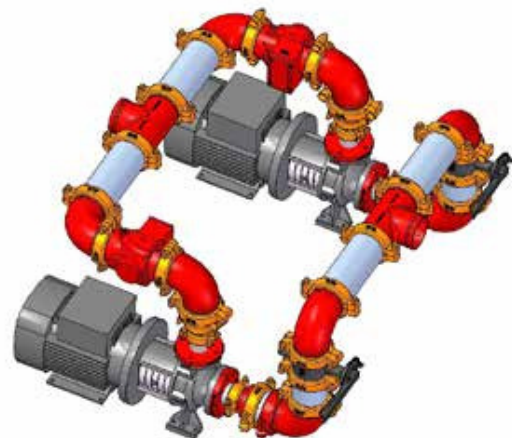




**Controls**

The microprocessor controller shall offer powerful analogue and digital control to meet a wide range of monitoring and control features including a real time clock and Industry standard communication port and network connections.

The controller’s inbuilt display shall be used for viewing the unit operating status and making adjustments to control parameters by allowing the operator access to a series of display pages.

Also featured shall be a visual alarm and the facility to adjust and display control settings by local operator for information and control.

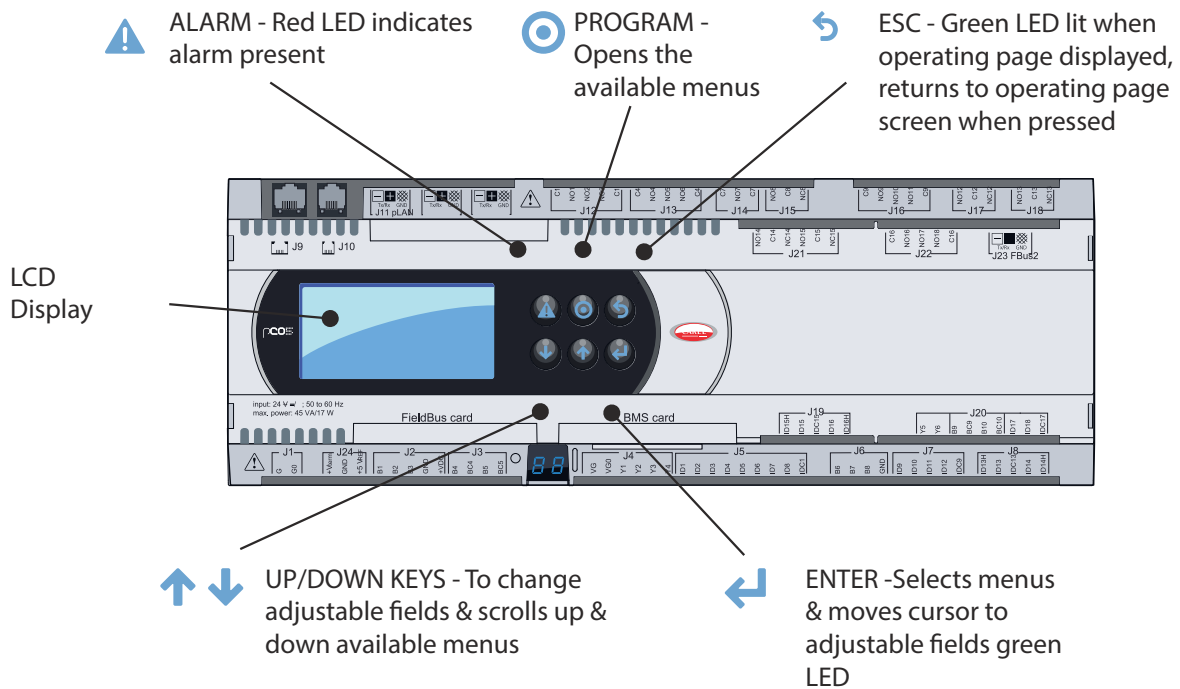

### Temperature Control

The microprocessor controller shall monitor the return and supply temperatures. The supply temperature is used to calculate the required cooling demand. Further calculations are then made to determine the optimum compressors to be selected and their individual cooling demands. These calculations ensure the unit efficiency is maximised under all load conditions. As standard, the microprocessor controller can provide an infinite capacity control between 15% and 100%, depending on the component selection. Refer to mechanical data tables for unit specific control ranges.

### Monitoring

The microprocessor shall also monitor and display the following measured parameters:

- Supply water temperature
- Return water temperature
- Liquid pressure
- Suction pressure
- Evaporator differential water pressure

### Alarm Handling

The controller shall log and allow viewing of the last 150 conditions recorded in descending chronological order through the keypad display.

The following conditions shall be detected, triggering a visual display:

- High compressor discharge temperature (per compressor)
- Low supply temperature
- Phase rotation
- Emergency stop
- Evaporator flow failure
- Low pressure safety switch
- Low suction pressure (per compressor)
- High liquid pressure
- Compressor 1 contactor status
- Compressor 2 contactor status
- Compressor 3 contactor status (dependant on model)
- Compressor 4 contactor status (dependant on model)
- Volt free contact non-critical alarm indication
- Volt free contact critical alarm indication

### Building Management Systems (BMS)

Sequencing (Master / Slave and Run / Standby) via the Airedale sequence manager.

Please specify at time of enquiry.

### Chiller Sequence Manager

For the efficient temperature and capacity operation of multiple units on a single site, the sequence manager will permit interlinked operation of the complete system thereby providing optimum temperature control and minimum power consumption.

Up to 6 units can be sequenced.

Included within this package is a site visit by an Airedale Control Specialist to set up multiple unit sequence control.

The chiller sequence manager is supplied as a separate control panel to be mounted remotely in an indoor location, such as a plant room.



**Unit Remote ON/OFF**

Disables / Enables the unit remotely.

**Compressor Anti Cycle Control**

Automatic via the Microprocessor.

**Compressor Load Limit**

This feature limits the condensing pressure to 15 Barg by unloading the compressor.

**Suction Pressure Limiting**

Limits the evaporating pressure by unloading at the minimum pressure set-point, which is, adjustable depending on system glycol content.

**Supply Temperature Limiting**

Based upon the freezing point of the water/ glycol solution, the unit operation is limited to a 2°C differential. Cooling is reduced as the temperature approaches the freezing point (below this differential).

**Pump(s) Remote ON/OFF**

Disables / Enables the pump(s) remotely.

**Evaporator Differential Pressure Sensor**

Shall facilitate low flow limiting and pressure drop monitoring via the microprocessor.

**Remote Setback Temperature Set-point Switch**

A setback set-point for supply water temperature shall be selected to suit summer / winter conditions or night setback.

**Remote Set-point Adjust**

Shall allow the chilled water set-point to be adjusted via an external 0-10V signal.

**Compressor Hours Run**

Displays hours run of each compressor.

**Interactive Head Pressure Setpoint Management**

The combination of variable speed compressor, EC fan and interactive control logic allows fans to be slowed down to give the optimum head pressure setpoint in relation to combined power draw of compressor and fans.

The fan speed shall automatically modulate to achieve the best energy balance for all normal operating conditions.

Reducing the head pressure setpoint decreases the compressor input power at the expense of the fan input power.

**Compressor Reduced Start Delay**

Compressor fast start functionality shall be available for applications that require minimum downtime following 3 phase power failure. This is subject to a compressor UPS being fitted onto the L4 permanent supply. Please contact Airedale.

**Password Protection**

The control system integrity shall be maintained by restricting access with a password PIN number.

**IMPORTANT:**

To change the PIN number; please contact Airedale at time of order with the preferred 4 digit number.

**BMS Interface Card**

BMS system configuration by others.

Enables units to be interfaced with most BMS, factory fitted, please contact Airedale.

A wide range of protocols shall be accommodated through the use of interface devices. Available as a standard option are: ModBus / Jbus, Carel, Trend, SNMP, LonWorks, Metasys and BACnet

Also available shall be Airedale's own supervisory plug-in BMS card pCOWEB.

Based on Ethernet TCP/IP secure technology with SNMP features.

Requires no proprietary cabling or monitoring software and supplied pre-programmed with an IP address for ease of setup.

**Modbus / Carel BMS Connection**

The Airedale controllers shall be able to communicate directly using the Modbus® protocol.

The Modbus® card shall be a small PCB (60mm x 30mm), which is plugged into the controller to provide it with the following protocol support

- Modbus® - JBus slave
- RTU mode (Remote Terminal Unit) with 8 bit encoding and error handling using 16 bit CRC
- Communication standard connection options of RS485 (multipoint) or RS232 (point-point)
- Maximum Baud Rate of 19200

The data communication shall be asynchronous serial, 8 data bits, 2 stop bits and no parity (in total 11 bits/datum).

The data/parameters from the controller shall be represented within Modbus® registers, each register containing information pertaining to temperatures, pressures, setpoint and status etc. shall be available to the site integration company in a spreadsheet format

**Lon BMS Connection**

The Airedale controllers, using special serial cards, shall be integrated into LonWorks® networks. The RS485 and the FTT10 standards shall be supported by the LonWorks® serial cards.

The two types of LonWorks® serial cards shall differ by the type of interface on the LonWorks® network side:-

FTT-10A 78 kbs (TP/FT-10)

RS485 39 kbs (TP/485-39)

**pCOWeb**

pCOWeb is a new generation of Airedale supervisory plug-in cards which make communicating with an Airedale unit simply a matter of logging onto the office Intranet or via the web.

Based on Ethernet TCP/IP secure technology, pCOWeb shall require no proprietary cabling. It shall have little or no setup on site and can be pre-programmed with an IP address prior to dispatch from airedale.

**CAUTION**

When adding to an existing controls scheme, please consult Airedale Controls to ensure strategy compatibility.


**Mechanical**

Mechanical	TCC	TCF
Lifting lugs	●	●
Base - plain galvanised steel	●	●
Panels - galvanised sheet steel with epoxy powder paint	●	●
Standard height fan discharge plenum	●	●
Extended height fan discharge plenum	○	○
Anti-vibration mounts (spring or pad type)	○	○
Control panel rain hood	○	○

● Standard features      ○ Optional features      — Feature not available

**Lifting Lugs**


Lifting Lugs shall be fitted to the unit enabling full lifting requirements. The lifting lug hole diameter is 40 mm.

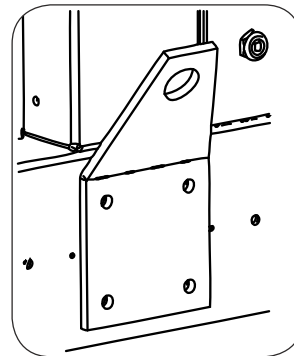

**Anti Vibration Mounts (Spring Type)**

Specially selected spring vibration isolators shall be supplied loose for on site fitting to the base frame of each unit.


The isolators shall be suitable for fitting to structural steelwork providing the surface is level and of sufficient strength where a high level of vibration elimination is required.

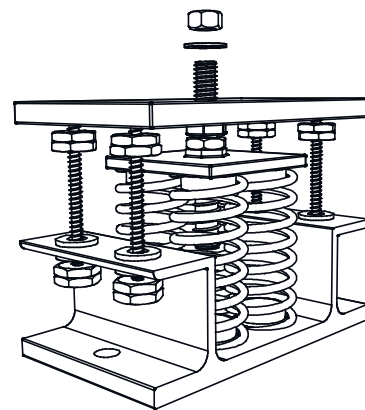

**Anti Vibration Mounts (Pad Type)**

Pad vibration isolators can be supplied loose for on site fitting to the base frame of each unit.

The isolators are suitable for fitting to structural steelwork providing the surface is level and of sufficient strength where a moderate degree of vibration elimination is required.

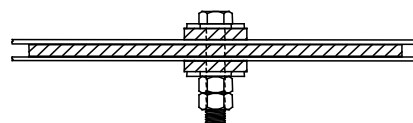





### Discharge Air Plenum - Condenser Fan

Factory fitted and constructed from galvanised sheet steel coated with epoxy baked powder paint, this plenum shall direct discharge air vertically which reduces air re-circulation and provides a degree of acoustic reduction in the horizontal plane.

Standard unit colour shall be Light Grey (RAL 7035).

The overall unit height when fitted with the standard discharge air plenum is 2800mm.

### Extended Discharge Air Plenum - Condenser Fan



Site fitted and constructed from galvanised sheet steel coated with epoxy baked powder paint, this plenum shall direct discharge air vertically as an aid to minimise air re-circulation and also offers a degree of acoustic reduction in the horizontal plane; site fitted.

Standard unit colour shall be Light Grey (RAL 7035).

The overall unit height when fitted with the extended discharge air plenum is 3300mm.

### Rain Hood

A rain hood shall be fitted to the TurboChill chiller which will allow the customer, (maintenance / commissioning personnel), to work on the control panel whatever the weather with a reduced risk of sensitive electrical components getting wet.

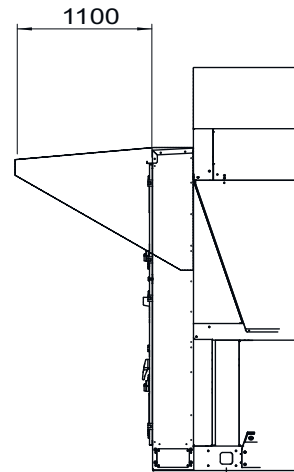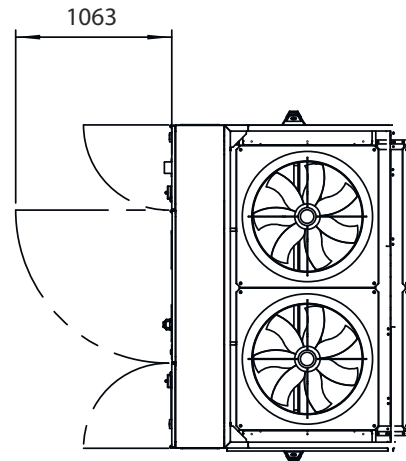


## Design Features & Information

### Pipework Design

Due to the unique oil free operation of the Turbochor compressor, the need for oil entrainment is eliminated. As pipe work is not required to be sized for oil return it is possible to size pipe work for minimal pressure losses through the system with maximum cooling capacity and optimised unit EER.

### Refrigeration Schematic

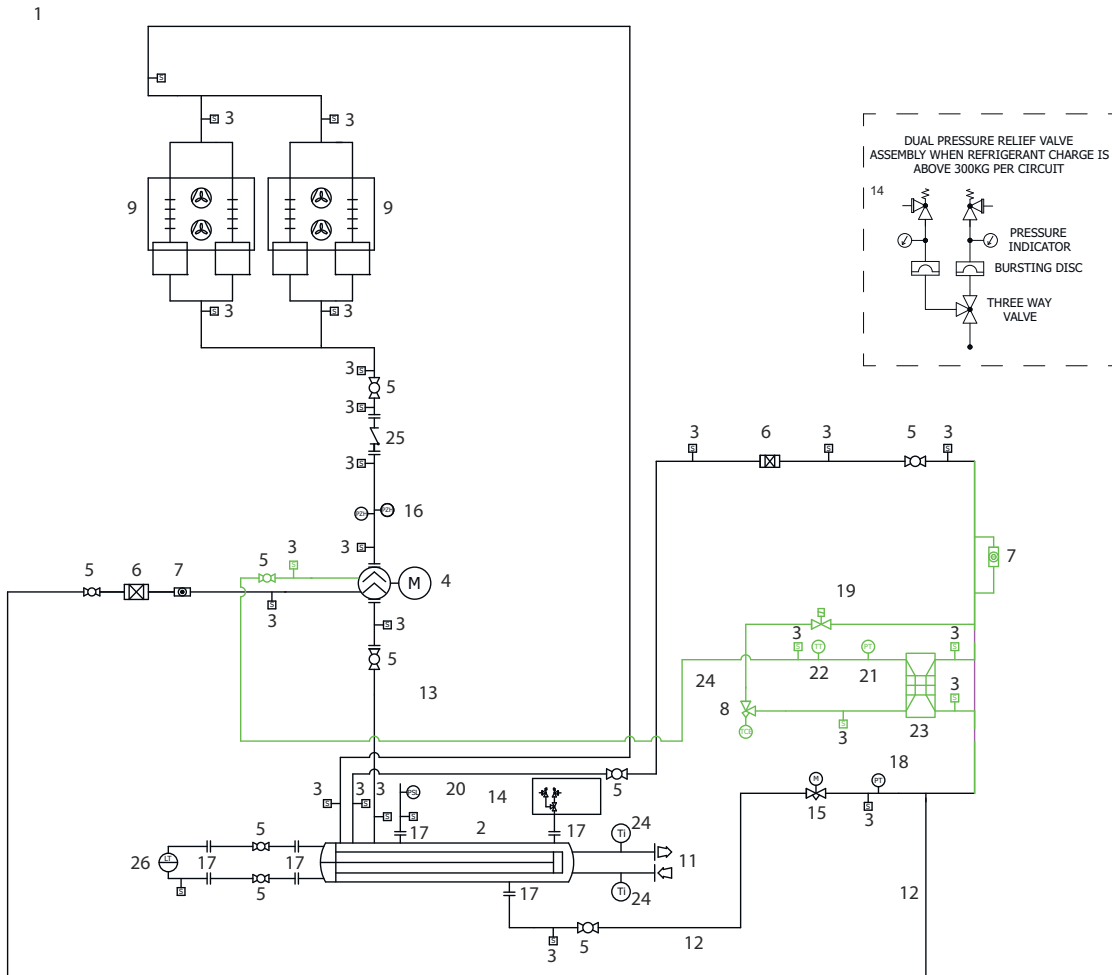

Note: Schematic above is for a single circuit machine.

key

- |    |  |    |                                |
|----|--|----|--------------------------------|
| 1  | Turbochill flooded schematic                         | 15 | Liquid level control valve     |
| 2  | Flooded evaporator                                   | 16 | High pressure switch           |
| 3  | Schrader connection                                  | 17 | Rotalock adapter               |
| 4  | Centrifugal compressor                               | 18 | Liquid pressure transmitter    |
| 5  | Shut off valve                                       | 19 | Solenoid valves                |
| 6  | Filter drier   | 20 | Low pressure switch            |
| 7  | Sight glass  | 21 | Economiser pressure transducer |
| 8  | Electronic expansion valve (economiser circuit only) | 22 | Temperature sensor             |
| 9  | Condenser section                                    | 23 | Economiser                     |
| 10 | Level transmitter                                    | 24 | Economiser line                |
| 11 | Water connections (Inlet /Outlet)                    | 25 | Non return valve               |
| 12 | Liquid line  | 26 | Liquid level sensor            |
| 13 | Suction line   |    |                                |
| 14 | Dual pressure relief valves                          |    |                                |

**Design Features & Information**

**Specific Heat Capacity (SHC)**

% Ethylene Glycol Concentration		0%	10%	20%	30%	40%
Specific Heat Capacity (kJ/kgK)	(1)	4.190	4.115	3.901	3.686	3.474
% Propylene Glycol Concentration		0%	10%	20%	30%	40%
Specific Heat Capacity (kJ/kgK)	(1)	4.190	4.139	4.033	3.903	3.749

(1) Data quoted for water/glycol solutions at a nominal temperature of 10°C.

**CAUTION**

Only use the SHC data when calculating fluid VOLUME. Use figure for 0% concentration (100% water) when applying Glycol Correction Factors, refer to Glycol Data.

**Minimum System Water Volume Calculations**

METHOD 1

(Preferred Method)

Where the system permanent heat load is known, the minimum water volume in litres Vmin is:

$$V_{min} = \text{Water Flow Rate (litres/min)} \times \text{Minimum Compressor Run Time (min)} \times \text{Chiller Loading Factor}$$

$$\text{Chiller Loading Factor} = \frac{\text{Minimum Turndown (kW)} \times 1.2}{\text{Permanent Heat Load}}$$

- Minimum Turndown =
- 1 compressor – 30%
  - 2 compressors – 15%
  - 3 compressors – 10%
  - 4 compressors – 5%

Example: 750kW output at 35°C Ambient and 7/12°C Water

Permanent Heat Load = 300kW  
 Minimum Turndown = 15% (2 compressors)

$$= V_{min} = \frac{750 \times 60}{4.19 \times 5} \times 2 \times \frac{(750 \times 0.15)}{300} \times 1.2 = 1933 \text{ Litres}$$

METHOD 2

Where the system permanent heat load is unknown:

$$V_{min} = \frac{\text{Water Flow Rate (litres/hour)} \times \text{Minimum turndown ratio} \times 1.2}{\text{Maximum number of compressor starts (per hour)}}$$

- Minimum Turndown =
- 1 compressor – 30%
  - 2 compressor – 15%
  - 3 compressors – 10%
  - 4 compressors – 5%

Example: 750kW output at 35°C Ambient and 7/12°C Water

Minimum Turndown = 0.15 (15% 2 compressors)

$$V_{min} = \frac{750 \times 3600}{4.19 \times 5} \times 0.15 \times 1.2 \times \frac{5}{60} = 1933 \text{ Litres}$$



### Capacity Data

For guidance, a number of units from 200 kW to 1700 kW at nominal conditions and at both fan speeds have been pre-selected and used throughout this manual for information only.

Please contact Airedale with your specific requirements and we will be pleased to provide you with an individually tailored selection and technical detail.

### Operating Limits


(For 100% Water) Standard Unit

Minimum ambient air DB	-20°C
Maximum ambient air DB at full load operation	35°C
Maximum ambient air DB at reduced load operation	40°C
Minimum supply water temperature	5°C
Maximum return water temperature	26°C*
Maximum supply water temperature	18°C
Minimum / maximum $\Delta T$	4K / 8K

\* With an 8K  $\Delta T$

**Typical Part Load Efficiencies**

The following graph gives a general indication of the effect of reduced load on the performance of the unit, for performance details, please contact Airedale.

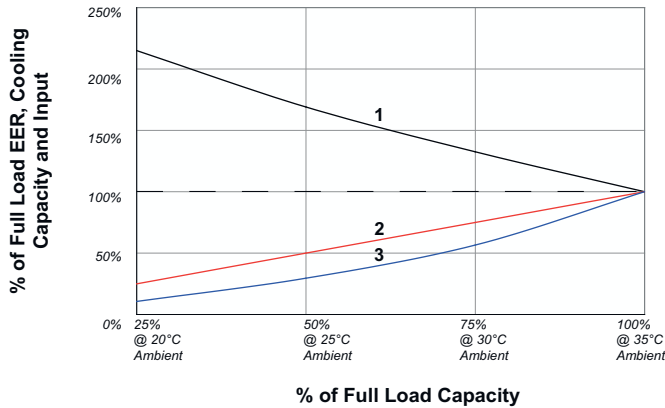

Key: 1 = EER  
2 = Output kW  
3 = Input kW

**ESEER Calculations**

The quoted EER figures cover the performance of the unit ONLY at the standard rating conditions of 7/12°C water, 35°C ambient. The ESEER (European Seasonal Energy Efficiency Ratio) calculation method has been developed by Eurovent to give a single value that is a realistic indication of the efficiency of the chiller across the year round range of operation.

The ESEER value is calculated from the unit's performance at 20, 25, 30 and 35°C ambient temperatures for 25, 50, 75 and 100% loading stages respectively, and with a fixed 7°C supply temperature. All calculations assume the system operates with 100% water.

$$ESEER = A \cdot EER_{100\%} + B \cdot EER_{75\%} + C \cdot EER_{50\%} + D \cdot EER_{25\%}$$

A, B, C and D are weighting factors 0.03, 0.33, 0.41 and 0.23.

	A	B	C	D
Temperature	35°C	30°C	25°C	20°C
Capacity Requirement	100%	75%	50%	25%
Percentage of Total Hours	0.03	0.33	0.41	0.23

**SEER**

The quoted EER figures cover the performance of the unit ONLY at the standard rating conditions of 7/12°C water, 35°C ambient. The SEER calculation method is used for part of the Building Regulations Part "L" to give a single value that realistically indicates the efficiency of the chiller across the year round range of operation.

The SEER value is calculated from the unit's performance at 20, 25, 30 and 35°C ambient temperatures for all loading stages, and with a fixed 7°C supply temperature. All calculations assume the system operates with 100% water.

$$SEER = A \cdot EER_{100\%} + B \cdot EER_{75\%} + C \cdot EER_{50\%} + D \cdot EER_{25\%}$$

Where A,B,C and D are specific weighting factors 0.12, 0.32, 0.36 and 0.2 for use on calculating SEER.

	A	B	C	D
Temperature	35°C	30°C	25°C	20°C
Capacity Requirement	100%	75%	50%	25%
Percentage of Total Hours	0.12	0.32	0.36	0.2

**Performance Effects of Glycol**

**Glycol Data**

For a given percentage of glycol in the system there are correction factors that need to be applied, the following tables can be used as a guide.

**CAUTION**

The source data must be 100% water for the correction factors to be valid.

**Ethylene Glycol Nominal Correction Factors**

Glycol in System / Freezing Point °C		10% / -4°C	20% / -9°C	30% / -15°C	40% / -23°C
Output (kW)		0.98	0.97	0.95	0.93
Compressor Input (kW)	x	0.99	0.98	0.96	0.95
Water Flow (l/s)		0.99	1.02	1.04	1.07
Pressure Drop (kPa)		1.05	1.20	1.38	1.57

**Propylene Glycol Nominal Correction Factors**

Glycol in System / Freezing Point °C		10% / -2°C	20% / -6°C	30% / -12°C	40% / -20°C
Output (kW)		0.97	0.95	0.91	0.88
Compressor Input (kW)	x	0.99	0.98	0.96	0.95
Water Flow (l/s)		0.98	0.97	0.95	0.95
Pressure Drop (kPa)		1.08	1.17	1.31	1.45

Example: At 100% Water:

- Output =750 kW
- Compressor Input =228.6 kW
- Flow Rate =35.83 l/s
- Pressure Drop =20.6 kPa
- Ambient =35°C
- Inlet Fluid Temp. =7°C
- Outlet Fluid Temp. =12°C (5K ΔT)

To 20% Ethylene Glycol:

	100% Water	Multiplier	20% Ethylene Glycol
Output (kW)	750	x 0.97	727.5 kW
Compressor Input (kW)	228.6	x 0.98	224.0 kW
Water Flow (l/s)	35.83	x 1.02	36.55 l/s
Pressure Drop (kPa)	20.6	x 1.20	24.72 kPa

## Sound Data

### Measurement of Sound Data

All sound data quoted has been measured in the third-octave band limited values, using a Real Time Analyser calibrated sound intensity meter in accordance with BS EN ISO9614 Part 1:1995. The Global sound data quoted is valid for noise emitted in the horizontal plane in all directions.

All Sound Power Levels quoted are calculated from measured sound intensity according to BS EN ISO9614 Part 1: 1995.


Sound Pressure Levels are calculated from sound power using the expanded parallelepiped method according to BS EN ISO 11203: 1996.

### Sound Directivity


The Global sound measurements quoted in the following tables do not incorporate any directivity or denote any sound level heard at any given position surrounding the unit, rather they represent the total sound level radiating from the unit in all directions in the horizontal plane from source.

Using the adjustment factors from the map below, partial sound power levels can be derived from the global sound power data.

### Base Correction Values - Global dB

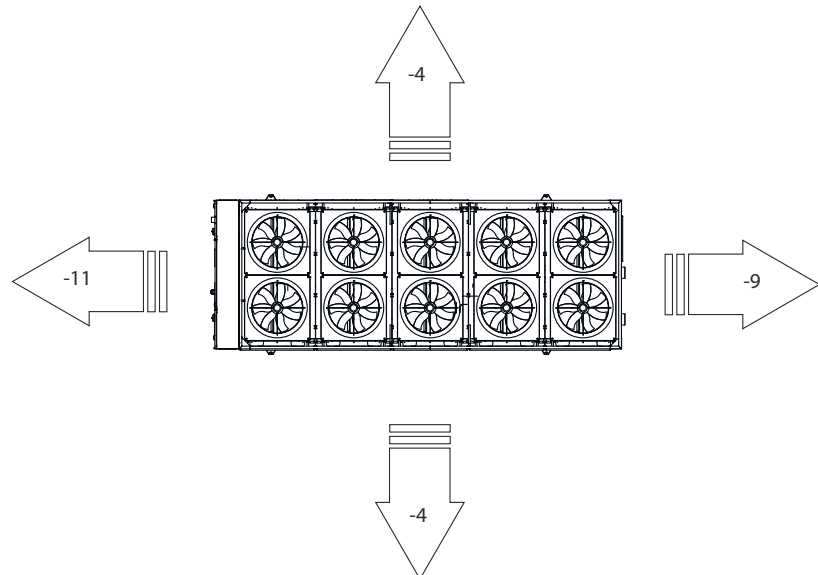

EXAMPLE (dB(A)):        470 kW  
 Output - Quiet Models - TCC12R08S-04  
 Overall Sound Power of 89 dB(A) =

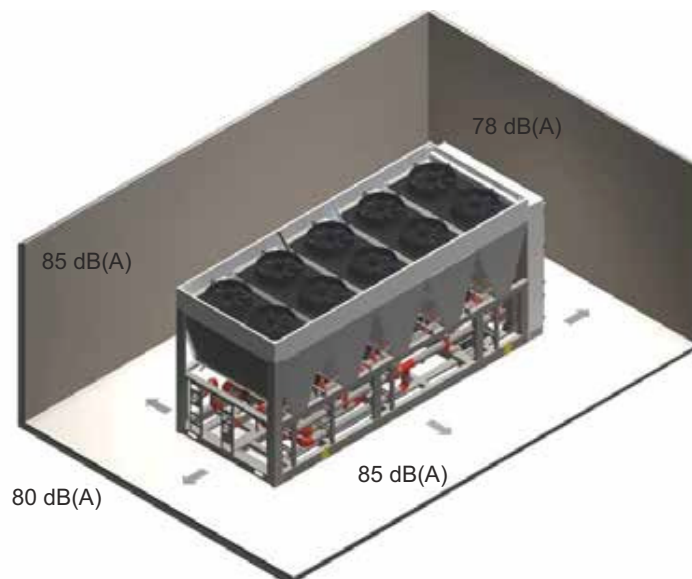


**Installation Data**

**Water System**


Chilled water pipe work and ancillary components must be installed in accordance with:

- National and Local Water supply company standards
- The manufacturer’s instructions are followed when fitting ancillary components
- The system liquid is treated to prevent corrosion and algae forming
- In ambients of 3°C and below, where static water can be expected, or when water supply temperatures of +5°C or below are required, the necessary concentration of Glycol or use of an electrical trace heater must be included
- The schematic is referred to as a guide to ancillary recommendations

**CAUTION**  The unit water connections are NOT designed to support external pipe work, pipe work MUST be supported separately.

**Grooved & Clamped Type Connection**


1. Clamp
2. Gasket
3. Counter pipe

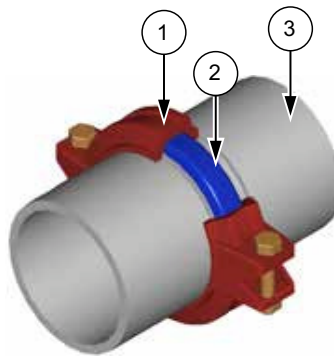


**Standard Recommended Installation**


**General**

The following diagram illustrates the minimum component installation requirements. A wide range of optional extras are available to suit various applications.

**CAUTION**  The following installation recommendations should be adhered to. Failure to do this may invalidate the chiller warranty. The water flow commissioning valve set is not shown in the diagram, as the valve can be fitted elsewhere within the chilled water circuit.

- |   |                 |   |                     |
|---|-----------------|---|---------------------|
| 1 | Filter 20 Mesh  | 4 | Flow switch         |
| 2 | Pump            | 5 | Flushing bypass leg |
| 3 | Pressure sensor |   |                     |

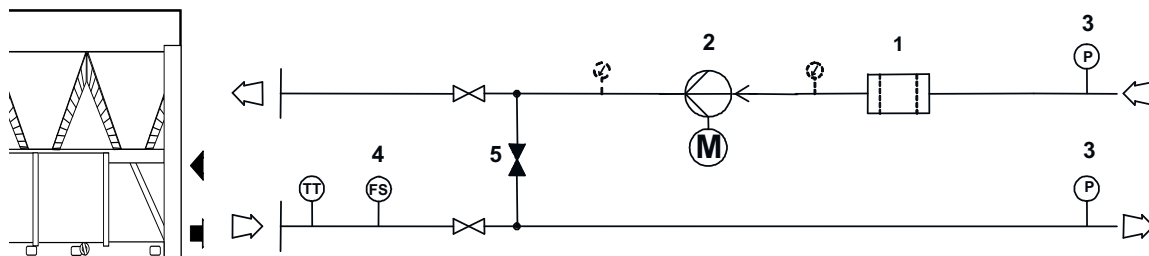

**CAUTION**  Full design water flow MUST be maintained at all times. Variable water volume is NOT recommended and will invalidate warranty. The correct operation of the flow proving device is critical if the chiller warranty is to be valid.



## Installation Data

### Water Systems and Recommended Flow Schemes

The recommended requirements to allow commissioning to be carried out correctly are:

- The inclusion of Binder Points adjacent to the flow and return connections, to allow temperature and pressure readings
- A flow switch or equivalent, fitted adjacent to the water outlet side of the Chiller
- A 20 mesh strainer fitted prior to the evaporator inlet
- A water-flow commissioning valve set fitted to the system
- In multiple chiller installations, 1 commissioning valve set is required per chiller
- Air vents are to be installed at all high points and where air is likely to be trapped at intermediate points
- Drain points are to be installed at all low points in the system and in particular adjacent to the unit for maintenance to be carried out. The unit must be drained for winter shutdown.
- Isolating valves should be installed adjacent to all major items of equipment for ease of maintenance
- Balancing valves can be installed if required to aid correct system balancing
- All chilled water pipe work must be insulated and vapour sealed to avoid condensation
- If several units are installed in parallel adjacent to each other, reverse return should be applied to avoid unnecessary balancing valves

### Pump Statement

When installing circulating water pumps or equipment containing them, the following rules should be applied:

- Ensure the system is filled with water then vented and the pump primed with water before running the pump, this is required because the pumped liquid cools the pump bearings and mechanical seal faces
- To avoid cavitation the NPSH (Net Positive Suction Head) incorporating a safety margin of 0.5m head must be available at the pump inlet during operation

### Interlocks & Protection

Always electrically interlock the operation of the chiller with the pump controls **and** water flow switch. These safety devices prevent the chiller operating with low water flow which can cause serious damage.

#### CAUTION



Failure to install both safety devices will invalidate the chiller warranty.


Do not rely solely on the BMS to protect the chiller against low flow conditions.

An evaporator pump interlock and flow switch **MUST** be directly wired to the Chiller, refer to **Interconnecting Wiring**.

### Flow Schemes

#### Basic Supplied Water Schematic - Evaporator only

(Includes Flow Proving Device)

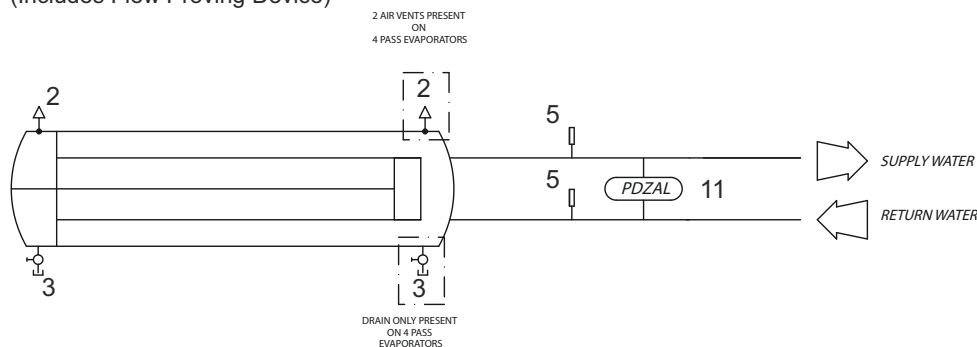


# Installation Data


## Standard Air Cooled Circuit

Incorporating

- 20 Mesh Water Filter
- Differential Pressure Transducer
- Shut off valves

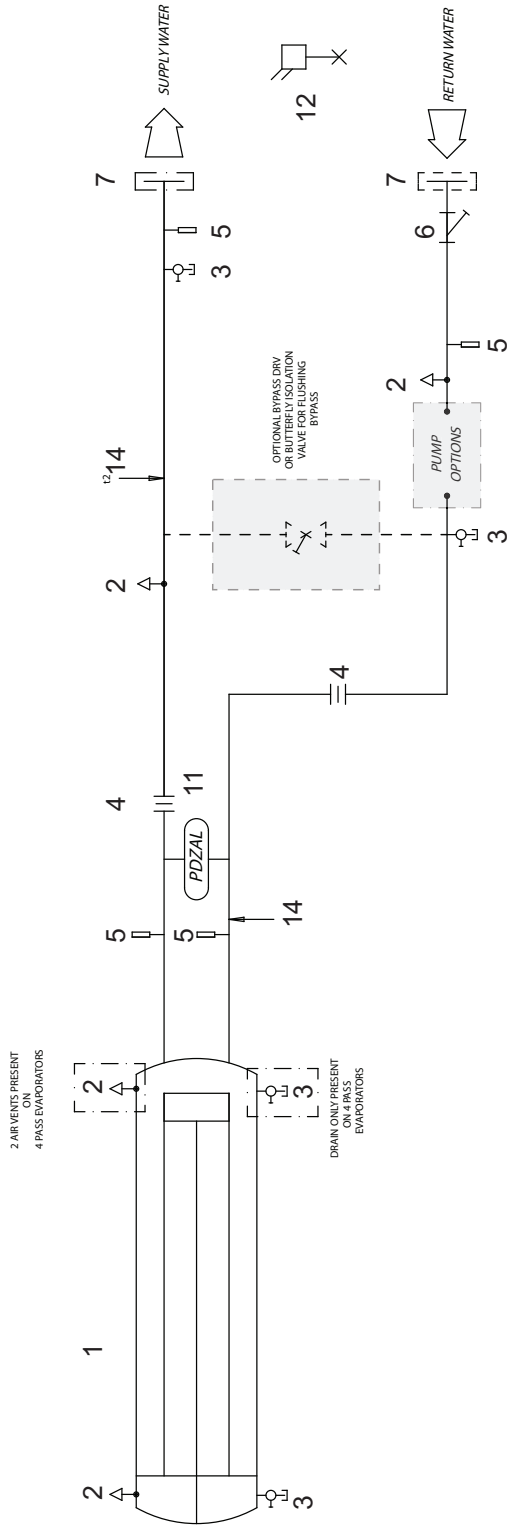

### Pump Options

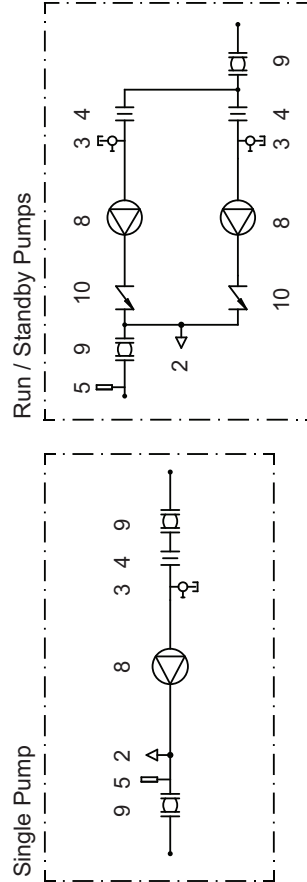

### Key


- 1 Evaporator
- 2 Automatic Air Vent
- 3 Drain
- 4 Butterfly Shut off valve
- 5 Binder Point
- 6 Filter
- 7 Flanged Terminations (Option)
- 8 Pump
- 9 AV Mounts
- 10 Non Return Valve
- 11 Differential pressure transducer
- 12 Flow switch
- 13 Double Regulating valve
- 14 temperature Sensor
- 15 Mixing valve
- 16 Free Cooling Coil

# Installation Data



## Standard Free Cool Circuit

Incorporating

- Double Regulating Valve
- Mixing Valve
- 20 Mesh Water Filter
- Differential Pressure Transducer

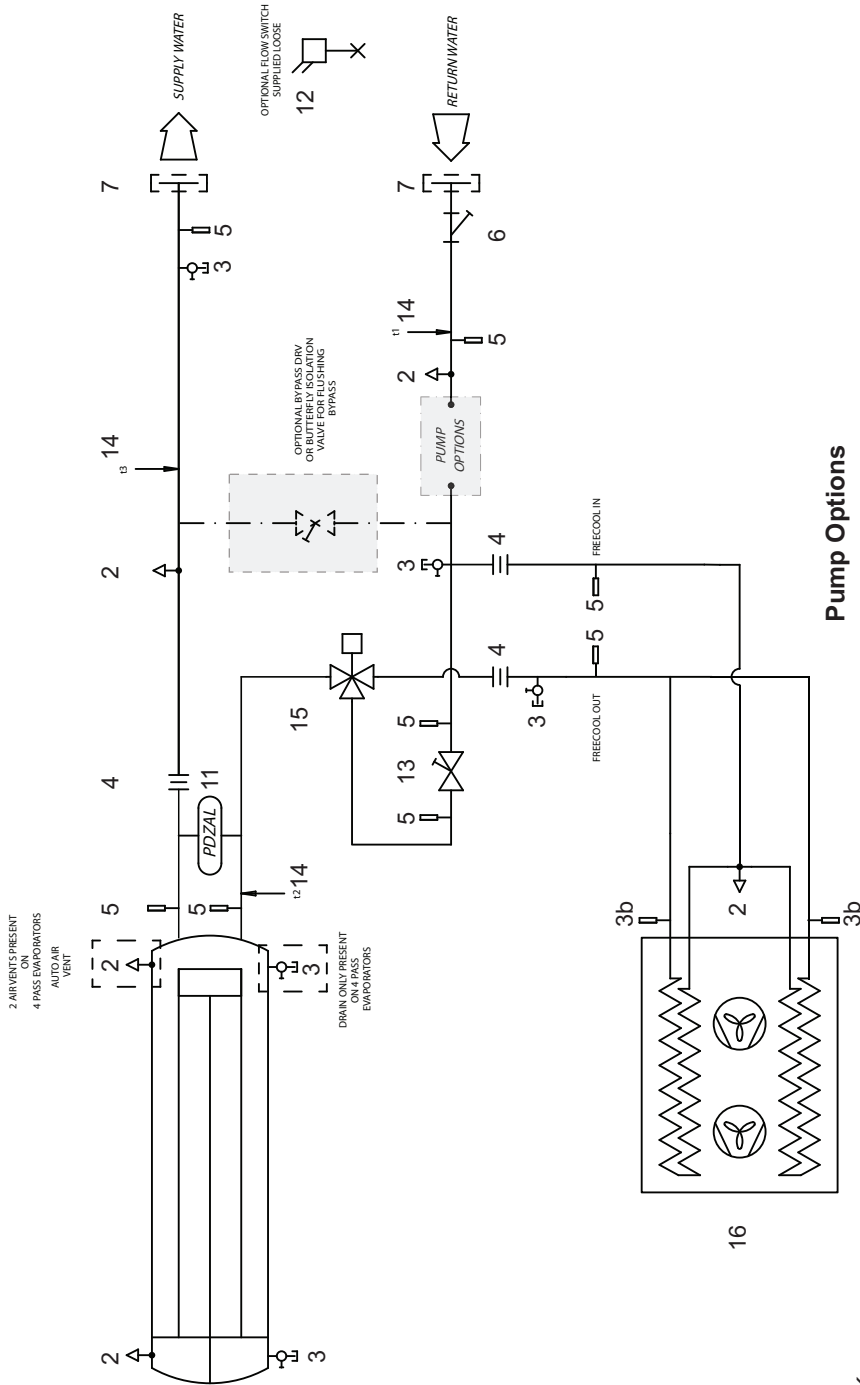

### Pump Options

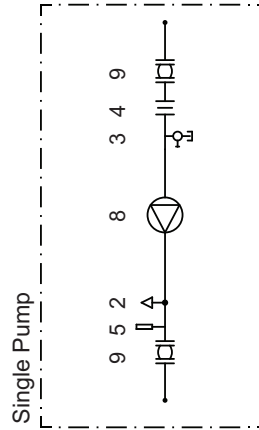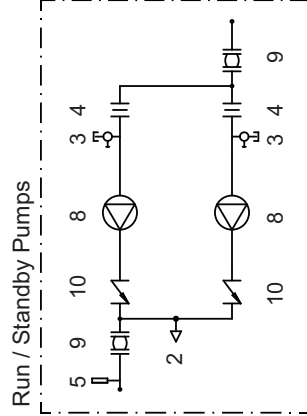

### Key

- 1 Evaporator
- 2 Automatic Air Vent
- 3 Drain
- 3b Drain (Schraeder point on Free cool coils)
- 4 Butterfly Shut off valve
- 5 Binder Point
- 6 Filter
- 7 Flanged Terminations (Option)
- 8 Pump
- 9 AV Mounts
- 10 Non Return Valve
- 11 Differential pressure transducer
- 12 Flow switch
- 13 Double Regulating valve
- 14 temperature Sensor
- 15 Mixing valve
- 16 Free Cooling Coil



**Technical Data - TCC (R) TCC11R04S-01, TCC11R06S-01, TCC11R08S-01**

**Mechanical**

Technical Air Cooled

			1	2	3
Mechanical Data	Notes	Units	TCC11R04S-01	TCC11R06S-01	TCC11R08S-01
Cooling Duty - AC Fans	(1)	kW	240	265	275
Nom Input -Cooling Only		kW	70	72	73
EER	(2)		3.45	3.69	3.75
ESEER	(3)		4.59	4.80	4.88
SEER	(3)		4.46	4.67	4.75
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	240	265	275
Nom Input -Cooling Only		kW	69	70	69
EER	(2)		3.50	3.78	3.97
ESEER	(3)		4.93	5.60	5.93
SEER	(3)		4.77	5.39	5.71
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	240	265	275
Nom Input -Cooling Only		kW	68.6	70.1	69.2
EER	(2)		3.50	3.78	3.98
ESEER	(3)		4.94	5.60	5.93
SEER	(3)		4.77	5.40	5.70
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	30-100%	30-100%	30-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 2626	2800 x 2200 x 3758	2800 x 2200 x 4890
Machine Weight	(7)	kg	2730	3345	3935
Operating Weight	(7)	kg	2840	3465	4055
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	22	22	22
Total Min. Water Flow		l/s	7.3	7.3	7.3
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	9.5	14.2	18.9
Maximum Airflow - AC Fans		m <sup>3</sup> /s	22.6	33.9	45.2
Maximum Airflow - EC Fans		m <sup>3</sup> /s	25.3	38.0	50.6
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	27.3	41.0	54.7
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			4	6	8
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	910	910	910
Maximum Speed - EC Fans		rpm	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			1	1	1
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged			R134a		
Charge (Total) CCT1 + CCT2		kg	135	145	165
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN100	DN100	DN100
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	102	102	102
Minimum System Water Volume	(8)	l	1123	1230	1272
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	9.5	10.5	10.9
Pressure Drop		kPa	26.1	30.8	32.8

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC11R04S-01, TCC11R06S-01, TCC11R08S-01

Electrical

			1	2	3
ELECTRICAL DATA			TCC11R04S-01	TCC11R06S-01	TCC11R08S-01
Unit Data					
Full Load Amps	(1)	A	152	160.8	169.4
Maximum Start Amps		A	2	2	2
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	160	200	200
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
Evaporator					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
External Trace Heating					
Available (fitted by others)		W	500	500	500
Condenser Fan - Per Fan (AC)					
Quantity			4	6	8
Full Load Amps		A	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15
Motor Rating		kW	1.8	1.8	1.8
Condenser Fan - Per Fan (EC)					
Quantity			4	6	8
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)					
Quantity			4	6	8
Full Load Amps		A	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	3.10	3.10	3.10
Compressor - Per Compressor					
Nominal Run Amps		A	135	135	135
Quantity			1	1	1
Motor Rating		kW	87	87	87
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Air Cooled Technical

Technical Data

TCC11R06L-02, TCC11R08L-03, TCC11R10L-03

Mechanical

Technical Air Cooled

			4	5	6
Mechanical Data	Notes	Units	TCC11R06L-02	TCC11R08L-03	TCC11R10L-03
Cooling Duty - AC Fans	(1)	kW	390	425	450
Nom Input -Cooling Only		kW	124	128	132
EER	(2)		3.14	3.32	3.41
ESEER	(3)		4.41	4.62	4.73
SEER	(3)		4.26	4.48	4.58
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	390	425	450
Nom Input -Cooling Only		kW	121	126	130
EER	(2)		3.22	3.36	3.46
ESEER	(3)		4.85	5.29	5.47
SEER	(3)		4.66	5.08	5.25
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	390	425	450
Nom Input -Cooling Only		kW	120.7	126.2	129.8
EER	(2)		3.23	3.37	3.47
ESEER	(3)		4.85	5.29	5.49
SEER	(3)		4.66	5.08	5.26
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	30-100%	30-100%	30-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 3758	2800 x 2200 x 4890	2800 x 2200 x 6022
Machine Weight	(7)	kg	3510	4325	4940
Operating Weight	(7)	kg	3650	4465	5080
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	50	28	28
Total Min. Water Flow		l/s	16.7	9.2	9.2
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	14.2	18.9	23.7
Maximum Airflow - AC Fans		m <sup>3</sup> /s	33.9	45.2	56.5
Maximum Airflow - EC Fans		m <sup>3</sup> /s	38.0	50.6	63.3
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	41.0	54.7	68.3
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			6	8	10
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	910	910	910
Maximum Speed - EC Fans		rpm	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			1	1	1
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged			R134a		
Charge (Total) CCT1 + CCT2		kg	170	320	340
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN100	DN100	DN100
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	126	114	114
Minimum System Water Volume	(8)	l	1786	1922	2029
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	15.5	16.9	17.8
Pressure Drop		kPa	8.7	41.4	45.7

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC11R06L-02, TCC11R08L-03, TCC11R10L-03

Electrical

			4	5	6
ELECTRICAL DATA			TCC11R06L-02	TCC11R08L-03	TCC11R10L-03
<b>Unit Data</b>					
Full Load Amps	(1)	A	236	244.4	253
Maximum Start Amps		A	2	2	2
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	250	315	315
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>					
Available (fitted by others)		W	500	500	500
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			6	8	10
Full Load Amps		A	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15
Motor Rating		kW	1.8	1.8	1.8
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			6	8	10
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			6	8	10
Full Load Amps		A	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	3.10	3.10	3.10
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	210	210	210
Quantity			1	1	1
Motor Rating		kW	129	129	129
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Air Cooled Technical

Technical Data

TCC12R08S-04, TCC12R10S-04, TCC12R12S-04

Mechanical

Technical Air Cooled

			7	8	9
Mechanical Data	Notes	Units	TCC12R08S-04	TCC12R10S-04	TCC12R12S-04
Cooling Duty - AC Fans	(1)	kW	470	500	530
Nom Input -Cooling Only		kW	135	138	144
EER	(2)		3.47	3.63	3.69
ESEER	(3)		4.78	4.84	4.87
SEER	(3)		4.63	4.70	4.73
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	470	500	530
Nom Input -Cooling Only		kW	134	136	141
EER	(2)		3.51	3.68	3.77
ESEER	(3)		5.41	5.62	5.73
SEER	(3)		5.19	5.40	5.51
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	470	500	530
Nom Input -Cooling Only		kW	133.7	135.6	140.4
EER	(2)		3.52	3.69	3.77
ESEER	(3)		5.42	5.62	5.73
SEER	(3)		5.20	5.40	5.51
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 4890	2800 x 2200 x 6022	2800 x 2200 x 7154
Machine Weight	(7)	kg	4720	5335	5950
Operating Weight	(7)	kg	4880	5500	6115
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	41	41	41
Total Min. Water Flow		l/s	13.3	13.3	13.3
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	18.9	23.7	28.4
Maximum Airflow - AC Fans		m <sup>3</sup> /s	45.2	56.5	67.8
Maximum Airflow - EC Fans		m <sup>3</sup> /s	50.6	63.3	75.9
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	54.7	68.3	82.0
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			8	10	12
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	910	910	910
Maximum Speed - EC Fans		rpm	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged			R134a		
Charge (Total) CCT1 + CCT2		kg	295	310	330
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN125	DN125	DN125
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	141	141	141
Minimum System Water Volume	(8)	l	1141	1205	1268
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	18.6	19.8	21.0
Pressure Drop		kPa	26.0	28.8	31.8

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale



Technical Data

TCC12R08S-04, TCC12R10S-04, TCC12R12S-04

Electrical

			7	8	9
ELECTRICAL DATA			TCC12R08S-04	TCC12R10S-04	TCC12R12S-04
<b>Unit Data</b>					
Full Load Amps	(1)	A	304	313	321.6
Maximum Start Amps		A	169	178	186.6
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	315	355	355
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>					
Available (fitted by others)		W	500	500	500
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			8	10	12
Full Load Amps		A	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15
Motor Rating		kW	1.8	1.8	1.8
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			8	10	12
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			8	10	12
Full Load Amps		A	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	3.10	3.10	3.10
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	135	135	135
Quantity			2	2	2
Motor Rating		kW	87	87	87
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Air Cooled Technical

Technical Data

TCC12R14S-04, TCC12R10L-05, TCC12R12L-06

Mechanical

Technical Air Cooled

			10	11	12
Mechanical Data	Notes	Units	TCC12R14S-04	TCC12R10L-05	TCC12R12L-06
Cooling Duty - AC Fans	(1)	kW	560	600	670
Nom Input -Cooling Only		kW	152	184	195
EER	(2)		3.69	3.26	3.43
ESEER	(3)		4.88	4.65	4.70
SEER	(3)		4.74	4.50	4.56
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	560	600	670
Nom Input -Cooling Only		kW	147	181	193
EER	(2)		3.82	3.32	3.47
ESEER	(3)		5.82	5.24	5.35
SEER	(3)		5.60	5.02	5.13
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	560	600	670
Nom Input -Cooling Only		kW	146.6	180.4	192.8
EER	(2)		3.82	3.33	3.47
ESEER	(3)		5.82	5.24	5.35
SEER	(3)		5.59	5.02	5.13
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 8286	2800 x 2200 x 6022	2800 x 2200 x 7154
Machine Weight	(7)	kg	6560	5430	6510
Operating Weight	(7)	kg	6735	5625	6760
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	41	50	59
Total Min. Water Flow		l/s	13.3	16.7	19.4
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	33.2	23.7	28.4
Maximum Airflow - AC Fans		m <sup>3</sup> /s	79.0	56.5	67.8
Maximum Airflow - EC Fans		m <sup>3</sup> /s	88.6	63.3	75.9
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	95.7	68.3	82.0
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			14	10	12
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	910	910	910
Maximum Speed - EC Fans		rpm	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged				R134a	
Charge (Total) CCT1 + CCT2		kg	340	290	445
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN125	DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	141	161	219
Minimum System Water Volume	(8)	l	1332	1438	1645
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	22.2	23.8	26.6
Pressure Drop		kPa	35.0	27.5	25.0

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

## Technical Data

## TCC12R14S-04, TCC12R10L-05, TCC12R12L-06

## Electrical

			10	11	12
ELECTRICAL DATA			TCC12R14S-04	TCC12R10L-05	TCC12R12L-05
Unit Data					
Full Load Amps	(1)	A	330	463	471.6
Maximum Start Amps		A	195	253	261.6
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	355	500	500
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
Evaporator					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
External Trace Heating					
Available (fitted by others)		W	500	500	500
Condenser Fan - Per Fan (AC)					
Quantity			14	10	12
Full Load Amps		A	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15
Motor Rating		kW	1.8	1.8	1.8
Condenser Fan - Per Fan (EC)					
Quantity			14	10	12
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)					
Quantity			14	10	12
Full Load Amps		A	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	3.10	3.10	3.10
Compressor - Per Compressor					
Nominal Run Amps		A	135	210	210
Quantity			2	2	2
Motor Rating		kW	87	129	129
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Technical Data

TCC12R14L-06, TCC12R16L-06, TCC12R18L-06, TCC12R20L-06

Mechanical

Technical Air Cooled

			13	14	15	16
Mechanical Data	Notes	Units	TCC12R14L-06	TCC12R16L-06	TCC12R18L-06	TCC12R20L-06
Cooling Duty - AC Fans	(1)	kW	750	800	850	900
Nom Input -Cooling Only		kW	217	229	247	263
EER	(2)		3.46	3.50	3.44	3.42
ESEER	(3)		4.78	4.81	4.81	4.79
SEER	(3)		4.64	4.66	4.66	4.64
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	750	800	850	900
Nom Input -Cooling Only		kW	214	226	244	259
EER	(2)		3.50	3.54	3.49	3.48
ESEER	(3)		5.49	5.57	5.62	5.64
SEER	(3)		5.26	5.34	5.38	5.39
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	750	800	850	900
Nom Input -Cooling Only		kW	213.8	225.8	243.3	258.6
EER	(2)		3.51	3.54	3.49	3.48
ESEER	(3)		5.49	5.57	5.62	5.63
SEER	(3)		5.26	5.34	5.38	5.39
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 8286	2800 x 2200 x 9418	2800 x 2200 x 10550	2800 x 2200 x 11682
Machine Weight	(7)	kg	7120	7755	8355	8975
Operating Weight	(7)	kg	7365	8010	8610	9235
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)			
Evaporator - Type			Flooded - Shell and Tube Evaporator			
Insulation			Class O, UV stable Insulation			
Total Max. Water Flow		l/s	59	59	59	59
Total Min. Water Flow		l/s	19.4	19.4	19.4	19.4
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins			
Face Area Total		m <sup>2</sup>	33.2	37.9	42.6	47.4
Maximum Airflow - AC Fans		m <sup>3</sup> /s	79.0	90.3	101.6	112.9
Maximum Airflow - EC Fans		m <sup>3</sup> /s	88.6	101.2	113.9	126.5
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	95.7	109.3	123.0	136.7
Condenser Fan & Motor			Sickle Bladed Axial Fan			
Quantity			14	16	18	20
Diameter		mm	800	800	800	800
Maximum Speed - AC Fans		rpm	910	910	910	910
Maximum Speed - EC Fans		rpm	1025	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor			
Quantity			2	2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation			
Refrigeration			Single Circuit	Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged			R134a			
Charge (Total) CCT1 + CCT2		kg	460	475	480	495
Refrigeration Control			Electronic Expansion Valve (EEV)			
Water System			Grooved Type Coupling and Pipe Assembly			
Water Inlet / Outlet			DN150	DN150	DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2	1/2
Water Volume		l	219	219	219	219
Minimum System Water Volume	(8)	l	1815	1921	2028	2134
Max System Operating Pressure		Barg	10	10	10	10
Flow Rate		l/s	29.7	31.7	33.7	35.7
Pressure Drop		kPa	30.4	34.1	37.9	42.0

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC12R14L-06, TCC12R16L-06, TCC12R18L-06, TCC12R20L-06

Electrical

			13	14	15	16
ELECTRICAL DATA			TCC12R14L-06	TCC12R16L-06	TCC12R18L-06	TCC12R20L-06
Unit Data						
Full Load Amps	(1)	A	480	488.8	497.4	506
Maximum Start Amps		A	270	278.8	287.4	296
Mains Supply		VAC	400V (±10%) 3PH 50Hz			
Recommended Mains Fuse Size		A	500	500	560	560
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)			
Independent Permanent Supply Recommended Fuse Size		A	25	25	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)			
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG			
Control Circuit		VAC	24 VAC & 230VAC (±10%)			
Evaporator						
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)	500 (2x 250)
External Trace Heating						
Available (fitted by others)		W	500	500	500	500
Condenser Fan - Per Fan (AC)						
Quantity			14	16	18	20
Full Load Amps		A	4.3	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15	15
Motor Rating		kW	1.8	1.8	1.8	1.8
Condenser Fan - Per Fan (EC)						
Quantity			14	16	18	20
Full Load Amps		A	3.9	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)						
Quantity			14	16	18	20
Full Load Amps		A	4.8	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	3.10	3.10	3.10	3.1
Compressor - Per Compressor						
Nominal Run Amps		A	210	210	210	210
Quantity			2	2	2	2
Motor Rating		kW	129	129	129	129
Start Amps		A	2	2	2	2
Type Of Start			Electronic Soft Start			

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Air Cooled Technical

Technical Data

TCC22R08S-14, TCC22R10S-14, TCC22R12S-14, TCC22R14S-14

Mechanical

Technical Air Cooled

			17	18	19	20
Mechanical Data	Notes	Units	TCC22R08S-14	TCC22R10S-14	TCC22R12S-14	TCC22R14S-14
Cooling Duty - AC Fans	(1)	kW	470	500	530	560
Nom Input -Cooling Only		kW	135	138	144	152
EER	(2)		3.47	3.63	3.69	3.69
ESEER	(3)		4.59	4.67	4.76	4.80
SEER	(3)		4.46	4.55	4.64	4.68
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	470	500	530	560
Nom Input -Cooling Only		kW	134	136	140	147
EER	(2)		3.51	3.68	3.77	3.82
ESEER	(3)		4.89	5.17	5.44	5.58
SEER	(3)		4.74	5.00	5.25	5.38
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	470	500	530	560
Nom Input -Cooling Only		kW	133.6	135.6	140.3	146.5
EER	(2)		3.52	3.69	3.78	3.82
ESEER	(3)		4.90	5.17	5.44	5.58
SEER	(3)		4.74	5.01	5.26	5.39
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 4890	2800 x 2200 x 6022	2800 x 2200 x 7154	2800 x 2200 x 8286
Machine Weight	(7)	kg	4770	5390	6020	6640
Operating Weight	(7)	kg	4910	5530	6160	6780
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)			
Evaporator - Type			Flooded - Shell and Tube Evaporator			
Insulation			Class O, UV stable Insulation			
Total Max. Water Flow		l/s	44	44	44	44
Total Min. Water Flow		l/s	14.6	14.6	14.6	14.6
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins			
Face Area Total		m²	18.9	23.7	28.4	33.2
Maximum Airflow - AC Fans		m³/s	45.2	56.5	67.8	79.0
Maximum Airflow - EC Fans		m³/s	50.6	63.3	75.9	88.6
Maximum Airflow - High Airflow EC Fans		m³/s	54.7	68.3	82.0	95.7
Condenser Fan & Motor			Sickle Bladed Axial Fan			
Quantity			8	10	12	14
Diameter		mm	800	800	800	800
Maximum Speed - AC Fans		rpm	910	910	910	910
Maximum Speed - EC Fans		rpm	1025	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor			
Quantity			2	2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation			
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a			
Charge (Total) CCT1 + CCT2		kg	155 + 150	160 + 160	170 + 165	180 + 170
Refrigeration Control			Electronic Expansion Valve (EEV)			
Water System			Grooved Type Coupling and Pipe Assembly			
Water Inlet / Outlet			DN125	DN125	DN125	DN125
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2	1/2
Water Volume		l	148	148	148	148
Minimum System Water Volume	(8)	l	1147	1211	1275	1339
Max System Operating Pressure		Barg	10	10	10	10
Flow Rate		l/s	18.6	19.8	21.0	22.2
Pressure Drop		kPa	22.5	25.1	27.8	30.6

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC22R08S-14, TCC22R10S-14, TCC22R12S-14, TCC22R14S-14

Electrical

			17	18	19	20
ELECTRICAL DATA			TCC22R08S-14	TCC22R10S-14	TCC22R12S-14	TCC22R14S-14
Unit Data						
Full Load Amps	(1)	A	304	313	322	330
Maximum Start Amps		A	169	178	187	195
Mains Supply		VAC	400V (±10%) 3PH 50Hz			
Recommended Mains Fuse Size		A	315	355	355	355
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)			
Independent Permanent Supply Recommended Fuse Size		A	25	25	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)			
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG			
Control Circuit		VAC	24 VAC & 230VAC (±10%)			
Evaporator						
Immersion Heater Rating		W	500 (2x 250)			
External Trace Heating						
Available (fitted by others)		W	500			
Condenser Fan - Per Fan (AC)						
Quantity			8	10	12	14
Full Load Amps		A	4.3	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15	15
Motor Rating		kW	1.8	1.8	1.8	1.8
Condenser Fan - Per Fan (EC)						
Quantity			8	10	12	14
Full Load Amps		A	3.9	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)						
Quantity			8	10	12	14
Full Load Amps		A	4.8	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	3.1	3.1	3.1	3.1
Compressor - Per Compressor						
Nominal Run Amps		A	135	135	135	135
Quantity			1	1	1	1
Motor Rating		kW	87	87	87	87
Start Amps		A	2	2	2	2
Type Of Start			Electronic Soft Start			

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Technical Data

TCC22R10L-15, TCC22R12L-15, TCC122R14L-15

Mechanical

Technical Air Cooled

			21	22	23
Mechanical Data	Notes	Units	TCC22R10L-15	TCC22R12L-15	TCC22R14L-15
Cooling Duty - AC Fans	(1)	kW	600	670	750
Nom Input -Cooling Only		kW	183	196	217
EER	(2)		3.27	3.42	3.46
ESEER	(3)		4.33	4.48	4.57
SEER	(3)		4.22	4.36	4.45
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	600	670	750
Nom Input -Cooling Only		kW	180	193	214
EER	(2)		3.33	3.47	3.50
ESEER	(3)		4.51	4.79	4.98
SEER	(3)		4.38	4.64	4.82
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	600	670	750
Nom Input -Cooling Only		kW	180.0	193.1	214.2
EER	(2)		3.33	3.47	3.50
ESEER	(3)		4.52	4.80	4.99
SEER	(3)		4.38	4.65	4.82
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 6022	2800 x 2200 x 7154	2800 x 2200 x 8286
Machine Weight	(7)	kg	5910	6540	7180
Operating Weight	(7)	kg	6120	6750	7390
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	59	59	59
Total Min. Water Flow		l/s	19.7	19.7	19.7
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	23.7	28.4	33.2
Maximum Airflow - AC Fans		m <sup>3</sup> /s	56.5	67.8	79.0
Maximum Airflow - EC Fans		m <sup>3</sup> /s	63.3	75.9	88.6
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	68.3	82.0	95.7
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			10	12	14
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	910	910	910
Maximum Speed - EC Fans		rpm	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged				R134a	
Charge (Total) CCT1 + CCT2		kg	220 + 220	230 + 225	235 + 230
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN150	DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	219	219	219
Minimum System Water Volume	(8)	l	1496	1645	1815
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	23.8	26.6	29.7
Pressure Drop		kPa	20.3	24.8	30.2

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale



Technical Data

TCC22R10L-15, TCC22R12L-15, TCC122R14L-15

Electrical

			21	22	23
ELECTRICAL DATA			TCC22R10L-15	TCC22R12L-15	TCC22R14L-15
Unit Data					
Full Load Amps	(1)	A	463	472	480
Maximum Start Amps		A	253	262	270
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	500	500	500
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
Evaporator					
Immersion Heater Rating		W	500 (2x 250)		
External Trace Heating					
Available (fitted by others)		W	500		
Condenser Fan - Per Fan (AC)					
Quantity			10	12	14
Full Load Amps		A	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15
Motor Rating		kW	1.8	1.8	1.8
Condenser Fan - Per Fan (EC)					
Quantity			10	12	14
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)					
Quantity			10	12	14
Full Load Amps		A	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	3.10	3.10	3.10
Compressor - Per Compressor					
Nominal Run Amps		A	210	210	210
Quantity			1	1	1
Motor Rating		kW	129	129	129
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCC22R16L-16, TCC22R18L-16, TCC22R20L-16

Mechanical

Technical Air Cooled

			24	25	26
Mechanical Data	Notes	Units	TCC22R16L-16	TCC22R18L-16	TCC22R20L-16
Cooling Duty - AC Fans	(1)	kW	800	850	900
Nom Input -Cooling Only		kW	228	246	263
EER	(2)		3.50	3.45	3.43
ESEER	(3)		4.62	4.69	4.73
SEER	(3)		4.50	4.55	4.59
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	800	850	900
Nom Input -Cooling Only		kW	226	243	259
EER	(2)		3.54	3.50	3.48
ESEER	(3)		5.16	5.29	5.39
SEER	(3)		4.98	5.10	5.19
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	800	850	900
Nom Input -Cooling Only		kW	225.4	242.9	258.3
EER	(2)		3.55	3.50	3.48
ESEER	(3)		5.16	5.30	5.40
SEER	(3)		4.98	5.10	5.19
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 9418	2800 x 2200 x 10550	2800 x 2200 x 11682
Machine Weight	(7)	kg	7790	8400	9010
Operating Weight	(7)	kg	8010	8620	9230
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	63	63	63
Total Min. Water Flow		l/s	20.9	20.9	20.9
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m²	37.9	42.6	47.4
Maximum Airflow - AC Fans		m³/s	90.3	101.6	112.9
Maximum Airflow - EC Fans		m³/s	101.2	113.9	126.5
Maximum Airflow - High Airflow EC Fans		m³/s	109.3	123.0	136.7
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			16	18	20
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	910	910	910
Maximum Speed - EC Fans		rpm	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a		
Charge (Total) CCT1 + CCT2		kg	235 + 230	240 + 235	250 + 245
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN150	DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	227	227	227
Minimum System Water Volume	(8)	l	1929	2036	2142
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	31.7	33.7	35.7
Pressure Drop		kPa	30.3	33.8	37.3

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC22R16L-16, TCC22R18L-16, TCC22R20L-16

Electrical

			24	25	26
ELECTRICAL DATA			TCC22R16L-16	TCC22R18L-16	TCC22R20L-16
<b>Unit Data</b>					
Full Load Amps	(1)	A	489	497	506
Maximum Start Amps		A	279	287	296
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	500	560	560
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)		
<b>External Trace Heating</b>					
Available (fitted by others)		W	500		
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			16	18	20
Full Load Amps		A	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15
Motor Rating		kW	1.8	1.8	1.8
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			16	18	20
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			16	18	20
Full Load Amps		A	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	3.10	3.10	3.10
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	210	210	210
Quantity			1	1	1
Motor Rating		kW	129	129	129
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCC23R12S-17, TCC23R14S-17, TCC23R16S-17, TCC23R18S-17

Mechanical

Technical Air Cooled

			27	28	29	30
Mechanical Data	Notes	Units	TCC23R12S-17	TCC23R14S-17	TCC23R16S-17	TCC23R18S-17
Cooling Duty - AC Fans	(1)	kW	630	680	730	780
Nom Input -Cooling Only		kW	178	187	198	210
EER	(2)		3.54	3.63	3.69	3.71
ESEER	(3)		4.74	4.82	4.84	4.89
SEER	(3)		4.60	4.69	4.71	4.75
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	630	680	730	780
Nom Input -Cooling Only		kW	176	184	194	205
EER	(2)		3.58	3.69	3.77	3.80
ESEER	(3)		5.33	5.48	5.56	5.66
SEER	(3)		5.13	5.28	5.35	5.44
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	630	680	730	780
Nom Input -Cooling Only		kW	175.8	184.1	193.4	205.0
EER	(2)		3.58	3.69	3.77	3.81
ESEER	(3)		5.33	5.48	5.56	5.66
SEER	(3)		5.13	5.28	5.36	5.45
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Capacity Steps	(6)	%	10-100%	10-100%	10-100%	10-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 7154	2800 x 2200 x 8286	2800 x 2200 x 9418	2800 x 2200 x 10550
Machine Weight	(7)	kg	6940	7560	8190	8820
Operating Weight	(7)	kg	7170	7790	8420	9050
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)			
Evaporator - Type			Flooded - Shell and Tube Evaporator			
Insulation			Class O, UV stable Insulation			
Total Max. Water Flow		l/s	67	67	67	67
Total Min. Water Flow		l/s	22.3	22.3	22.3	22.3
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins			
Face Area Total		m²	28.4	33.2	37.9	42.6
Maximum Airflow - AC Fans		m³/s	67.8	79.0	90.3	101.6
Maximum Airflow - EC Fans		m³/s	75.9	88.6	101.2	113.9
Maximum Airflow - High Airflow EC Fans		m³/s	82.0	95.7	109.3	123.0
Condenser Fan & Motor			Sickle Bladed Axial Fan			
Quantity			12	14	16	18
Diameter		mm	800	800	800	800
Maximum Speed - AC Fans		rpm	910	910	910	910
Maximum Speed - EC Fans		rpm	1025	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor			
Quantity			3	3	3	3
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation			
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a			
Charge (Total) CCT1 + CCT2		kg	330 + 170	340 + 175	355 + 180	355 + 185
Refrigeration Control			Electronic Expansion Valve (EEV)			
Water System			Grooved Type Coupling and Pipe Assembly			
Water Inlet / Outlet			DN150	DN150	DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2	1/2
Water Volume		l	235	235	235	235
Minimum System Water Volume	(8)	l	1129	1200	1271	1342
Max System Operating Pressure		Barg	10	10	10	10
Flow Rate		l/s	25.0	27.0	29.0	30.9
Pressure Drop		kPa	17.8	20.4	23.2	26.1

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC23R12S-17, TCC23R14S-17, TCC23R16S-17, TCC23R18S-17

Electrical

			27	28	29	30
ELECTRICAL DATA			TCC23R12S-17	TCC23R14S-17	TCC23R16S-17	TCC23R18S-17
Unit Data						
Full Load Amps	(1)	A	457	465	474	482
Maximum Start Amps		A	322	330	339	347
Mains Supply		VAC	400V (±10%) 3PH 50Hz			
Recommended Mains Fuse Size		A	500	500	500	500
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)			
Independent Permanent Supply Recommended Fuse Size		A	25	25	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)			
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG			
Control Circuit		VAC	24 VAC & 230VAC (±10%)			
Evaporator						
Immersion Heater Rating		W	500 (2x 250)			
External Trace Heating						
Available (fitted by others)		W	500			
Condenser Fan - Per Fan (AC)						
Quantity			12	14	16	18
Full Load Amps		A	4.3	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15	15
Motor Rating		kW	1.8	1.8	1.8	1.8
Condenser Fan - Per Fan (EC)						
Quantity			12	14	16	18
Full Load Amps		A	3.9	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)						
Quantity			12	14	16	18
Full Load Amps		A	4.8	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	3.10	3.10	3.10	3.1
Compressor - Per Compressor						
Nominal Run Amps		A	135	135	135	135
Quantity			2	2	2	2
Motor Rating		kW	87	87	87	87
Start Amps		A	2	2	2	2
Type Of Start			Electronic Soft Start			

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Air Cooled Technical

Technical Data

TCC23R16L-19, TCC23R18L-19

Mechanical

Technical Air Cooled

			31	32
Mechanical Data	Notes	Units	TCC23R16L-19	TCC23R18L-19
Cooling Duty - AC Fans	(1)	kW	840	900
Nom Input -Cooling Only		kW	251	259
EER	(2)		3.35	3.47
ESEER	(3)		4.66	4.70
SEER	(3)		4.51	4.56
Nominal Output - Free Cooling	(4)	kW	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	840	900
Nom Input -Cooling Only		kW	248	256
EER	(2)		3.39	3.51
ESEER	(3)		5.16	5.30
SEER	(3)		4.96	5.10
Nominal Output - Free Cooling	(4)	kW	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	840	900
Nom Input -Cooling Only		kW	247.3	256.0
EER	(2)		3.40	3.52
ESEER	(3)		5.17	5.31
SEER	(3)		4.97	5.11
Nominal Output - Free Cooling	(4)	kW	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A
Capacity Steps	(6)	%	10-100%	10-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 9418	2800 x 2200 x 10550
Machine Weight	(7)	kg	8920	9550
Operating Weight	(7)	kg	9200	9830
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)	
Evaporator - Type			Flooded - Shell and Tube Evaporator	
Insulation			Class O, UV stable Insulation	
Total Max. Water Flow		l/s	86	86
Total Min. Water Flow		l/s	28.8	28.8
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins	
Face Area Total		m <sup>2</sup>	37.9	42.6
Maximum Airflow - AC Fans		m <sup>3</sup> /s	90.3	101.6
Maximum Airflow - EC Fans		m <sup>3</sup> /s	101.2	113.9
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	109.3	123.0
Condenser Fan & Motor			Sickle Bladed Axial Fan	
Quantity			16	18
Diameter		mm	800	800
Maximum Speed - AC Fans		rpm	910	910
Maximum Speed - EC Fans		rpm	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor	
Quantity			3	3
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation	
Refrigeration			Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a	
Charge (Total) CCT1 + CCT2		kg	460 + 225	465 + 235
Refrigeration Control			Electronic Expansion Valve (EEV)	
Water System			Grooved Type Coupling and Pipe Assembly	
Water Inlet / Outlet			DN200	DN200
Water Drain / Bleed - Evap		inch	1/2	1/2
Water Volume		l	282	282
Minimum System Water Volume	(8)	l	1474	1559
Max System Operating Pressure		Barg	10	10
Flow Rate		l/s	33.3	35.7
Pressure Drop		kPa	18.6	21.0

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC23R16L-19, TCC23R18L-19

Electrical

			31	32
ELECTRICAL DATA			TCC23R16L-19	TCC23R18L-19
Unit Data				
Full Load Amps	(1)	A	699	707
Maximum Start Amps		A	489	497
Mains Supply		VAC	400V (±10%) 3PH 50Hz	
Recommended Mains Fuse Size		A	710	750
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)	
Independent Permanent Supply Recommended Fuse Size		A	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)	
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG	
Control Circuit		VAC	24 VAC & 230VAC (±10%)	
Evaporator				
Immersion Heater Rating		W	500 (2x 250)	
External Trace Heating				
Available (fitted by others)		W	500	
Condenser Fan - Per Fan (AC)				
Quantity			16	18
Full Load Amps		A	4.3	4.3
Locked Rotor Amps		A	15	15
Motor Rating		kW	1.8	1.8
Condenser Fan - Per Fan (EC)				
Quantity			16	18
Full Load Amps		A	3.9	3.9
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)				
Quantity			16	18
Full Load Amps		A	4.8	4.8
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	3.10	3.10
Compressor - Per Compressor				
Nominal Run Amps		A	210	210
Quantity			2	2
Motor Rating		kW	129	129
Start Amps		A	2	2
Type Of Start			Electronic Soft Start	

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCC23R20L-20, TCC23R22L-20, TCC23R24L-20

Mechanical

Technical Air Cooled

			33	34	35
Mechanical Data	Notes	Units	TCC23R20L-20	TCC23R22L-20	TCC23R24L-20
Cooling Duty - AC Fans	(1)	kW	960	1020	1080
Nom Input -Cooling Only		kW	271	285	299
EER	(2)		3.54	3.58	3.61
ESEER	(3)		4.74	4.76	4.79
SEER	(3)		4.61	4.63	4.65
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	960	1020	1080
Nom Input -Cooling Only		kW	267	280	294
EER	(2)		3.59	3.64	3.67
ESEER	(3)		5.38	5.44	5.50
SEER	(3)		5.18	5.24	5.29
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	960	1020	1080
Nom Input -Cooling Only		kW	266.9	279.8	293.9
EER	(2)		3.60	3.64	3.68
ESEER	(3)		5.39	5.45	5.50
SEER	(3)		5.19	5.24	5.29
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	10-100%	10-100%	10-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 11682	2800 x 2200 x 12814	2800 x 2200 x 13946
Machine Weight	(7)	kg	10200	10810	11460
Operating Weight	(7)	kg	10490	11100	11750
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	91	91	91
Total Min. Water Flow		l/s	30.4	30.4	30.4
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	47.4	52.1	56.8
Maximum Airflow - AC Fans		m <sup>3</sup> /s	112.9	124.2	135.5
Maximum Airflow - EC Fans		m <sup>3</sup> /s	126.5	139.2	151.9
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	136.7	150.3	164.0
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			20	22	24
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	910	910	910
Maximum Speed - EC Fans		rpm	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			3	3	3
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a		
Charge (Total) CCT1 + CCT2		kg	465 + 235	475 + 235	480 + 250
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN200	DN200	DN200
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	292	292	292
Minimum System Water Volume	(8)	l	1653	1739	1824
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	38.1	40.5	42.8
Pressure Drop		kPa	21.6	24.1	26.7

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale



Technical Data

TCC23R20L-20, TCC23R22L-20, TCC23R24L-20

Electrical

			33	34	35
ELECTRICAL DATA			TCC23R20L-20	TCC23R22L-20	TCC23R24L-20
Unit Data					
Full Load Amps	(1)	A	716	725	733
Maximum Start Amps		A	506	515	523
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	750	750	750
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25		25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
Evaporator					
Immersion Heater Rating		W	500 (2x 250)		
External Trace Heating					
Available (fitted by others)		W	500		
Condenser Fan - Per Fan (AC)					
Quantity			20	22	24
Full Load Amps		A	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15
Motor Rating		kW	1.8	1.8	1.8
Condenser Fan - Per Fan (EC)					
Quantity			20	22	24
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)					
Quantity			20	22	24
Full Load Amps		A	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	3.1	3.1	3.1
Compressor - Per Compressor					
Nominal Run Amps		A	210	210	210
Quantity			2	2	2
Motor Rating		kW	129	129	129
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Air Cooled Technical

Technical Data

TCC24R16S-18, TCC24R18S-18

Mechanical

Technical Air Cooled

			36	37
Mechanical Data	Notes	Units	TCC24R16S-18	TCC24R18S-18
Cooling Duty - AC Fans	(1)	kW	820	860
Nom Input -Cooling Only		kW	232	238
EER	(2)		3.54	3.62
ESEER	(3)		4.82	4.86
SEER	(3)		4.68	4.72
Nominal Output - Free Cooling	(4)	kW	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	820	860
Nom Input -Cooling Only		kW	229	234
EER	(2)		3.58	3.68
ESEER	(3)		5.54	5.64
SEER	(3)		5.32	5.42
Nominal Output - Free Cooling	(4)	kW	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	820	860
Nom Input -Cooling Only		kW	228.6	233.8
EER	(2)		3.59	3.68
ESEER	(3)		5.54	5.64
SEER	(3)		5.32	5.42
Nominal Output - Free Cooling	(4)	kW	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A
Capacity Steps	(6)	%	7.5-100%	7.5-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 9418	2800 x 2200 x 10550
Machine Weight	(7)	kg	8580	9210
Operating Weight	(7)	kg	8830	9460
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)	
Evaporator - Type			Flooded - Shell and Tube Evaporator	
Insulation			Class O, UV stable Insulation	
Total Max. Water Flow		l/s	78	78
Total Min. Water Flow		l/s	25.8	25.8
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins	
Face Area Total		m <sup>2</sup>	37.9	42.6
Maximum Airflow - AC Fans		m <sup>3</sup> /s	90.3	101.6
Maximum Airflow - EC Fans		m <sup>3</sup> /s	101.2	113.9
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	109.3	123.0
Condenser Fan & Motor			Sickle Bladed Axial Fan	
Quantity			16	18
Diameter		mm	800	800
Maximum Speed - AC Fans		rpm	910	910
Maximum Speed - EC Fans		rpm	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor	
Quantity			4	4
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation	
Refrigeration			Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a	
Charge (Total) CCT1 + CCT2		kg	250 + 250	260 + 250
Refrigeration Control			Electronic Expansion Valve (EEV)	
Water System			Grooved Type Coupling and Pipe Assembly	
Water Inlet / Outlet			DN200	DN200
Water Drain / Bleed - Evap		inch	1/2	1/2
Water Volume		l	260	260
Minimum System Water Volume	(8)	l	1074	1114
Max System Operating Pressure		Barg	10	10
Flow Rate		l/s	32.5	34.1
Pressure Drop		kPa	21.5	23.4

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedate.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedate

Technical Data

TCC24R16S-18, TCC24R18S-18

Electrical

			36	37
ELECTRICAL DATA			TCC24R16S-18	TCC24R18S-18
Unit Data				
Full Load Amps	(1)	A	609	617
Maximum Start Amps		A	474	482
Mains Supply		VAC	400V (±10%) 3PH 50Hz	
Recommended Mains Fuse Size		A	630	630
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)	
Independent Permanent Supply Recommended Fuse Size		A	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)	
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG	
Control Circuit		VAC	24 VAC & 230VAC (±10%)	
Evaporator				
Immersion Heater Rating		W	500 (2x 250)	
External Trace Heating				
Available (fitted by others)		W	500	
Condenser Fan - Per Fan (AC)				
Quantity			16	18
Full Load Amps		A	4.3	4.3
Locked Rotor Amps		A	15	15
Motor Rating		kW	1.8	1.8
Condenser Fan - Per Fan (EC)				
Quantity			16	18
Full Load Amps		A	3.9	3.9
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)				
Quantity			16	18
Full Load Amps		A	4.8	4.8
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	3.10	3.10
Compressor - Per Compressor				
Nominal Run Amps		A	135	135
Quantity			2	2
Motor Rating		kW	87	87
Start Amps		A	2	2
Type Of Start			Electronic Soft Start	

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Air Cooled Technical

Technical Data

TCC24R20S-18, TCC24R22S-18, TCC24R24S-18

Mechanical

Technical Air Cooled

			38	39	40
Mechanical Data	Notes	Units	TCC24R20S-18	TCC24R22S-18	TCC24R24S-18
Cooling Duty - AC Fans	(1)	kW	900	950	1000
Nom Input -Cooling Only		kW	245	256	268
EER	(2)		3.68	3.71	3.73
ESEER	(3)		4.89	4.90	4.90
SEER	(3)		4.75	4.76	4.77
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	900	950	1000
Nom Input -Cooling Only		kW	240	250	261
EER	(2)		3.75	3.80	3.84
ESEER	(3)		5.73	5.78	5.82
SEER	(3)		5.50	5.55	5.59
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	900	950	1000
Nom Input -Cooling Only		kW	239.5	249.7	260.2
EER	(2)		3.76	3.80	3.84
ESEER	(3)		5.73	5.78	5.82
SEER	(3)		5.50	5.55	5.59
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	7.5-100%	7.5-100%	7.5-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 11682	2800 x 2200 x 12814	2800 x 2200 x 13946
Machine Weight	(7)	kg	9860	10480	11110
Operating Weight	(7)	kg	10110	10730	11360
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	78	78	78
Total Min. Water Flow		l/s	25.8	25.8	25.8
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	47.4	52.1	56.8
Maximum Airflow - AC Fans		m <sup>3</sup> /s	112.9	124.2	135.5
Maximum Airflow - EC Fans		m <sup>3</sup> /s	126.5	139.2	151.9
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	136.7	150.3	164.0
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			20	22	24
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	910	910	910
Maximum Speed - EC Fans		rpm	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			4	4	4
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a		
Charge (Total) CCT1 + CCT2		kg	270 + 265	270 + 275	285 + 280
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN200	DN200	DN200
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	260	260	260
Minimum System Water Volume	(8)	l	1153	1203	1253
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	35.7	37.7	39.7
Pressure Drop		kPa	25.3	27.9	30.5

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC24R20S-18, TCC24R22S-18, TCC24R24S-18

Electrical

		38	39	40
ELECTRICAL DATA		TCC24R20S-18	TCC24R22S-18	TCC24R24S-18
Unit Data				
Full Load Amps	(1) A	626	635	643
Maximum Start Amps	A	491	500	508
Mains Supply	VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size	A	670	670	670
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)	mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size	A	25	25	25
Independent Permanent Supply	VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)	mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit	VAC	24 VAC & 230VAC (±10%)		
Evaporator				
Immersion Heater Rating	W	500 (2x 250)		
External Trace Heating				
Available (fitted by others)	W	500		
Condenser Fan - Per Fan (AC)				
Quantity		20	22	24
Full Load Amps	A	4.3	4.3	4.3
Locked Rotor Amps	A	15	15	15
Motor Rating	kW	1.8	1.8	1.8
Condenser Fan - Per Fan (EC)				
Quantity		20	22	24
Full Load Amps	A	3.9	3.9	3.9
Locked Rotor Amps	A	N/A	N/A	N/A
Motor Rating	kW	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)				
Quantity		20	22	24
Full Load Amps	A	4.8	4.8	4.8
Locked Rotor Amps	A	N/A	N/A	N/A
Motor Rating	kW	3.10	3.10	3.1
Compressor - Per Compressor				
Nominal Run Amps	A	135	135	135
Quantity		2	2	2
Motor Rating	kW	87	87	87
Start Amps	A	2	2	2
Type Of Start		Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Air Cooled Technical

Technical Data

TCC24R20L-21, TCC24R22L-21, TCC24R24L-21

Mechanical

Technical Air Cooled

			41	42	43
Mechanical Data	Notes	Units	TCC24R20L-21	TCC24R22L-21	TCC24R24L-21
Cooling Duty - AC Fans	(1)	kW	1040	1100	1160
Nom Input -Cooling Only		kW	316	325	335
EER	(2)		3.29	3.38	3.46
ESEER	(3)		4.79	4.81	4.82
SEER	(3)		4.63	4.65	4.67
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	1040	1100	1160
Nom Input -Cooling Only		kW	313	322	331
EER	(2)		3.33	3.42	3.51
ESEER	(3)		5.35	5.42	5.48
SEER	(3)		5.14	5.21	5.26
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	1040	1100	1160
Nom Input -Cooling Only		kW	312.2	321.2	330.3
EER	(2)		3.33	3.42	3.51
ESEER	(3)		5.35	5.42	5.48
SEER	(3)		5.14	5.21	5.26
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	7.5-100%	7.5-100%	7.5-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 11682	2800 x 2200 x 12814	2800 x 2200 x 13946
Machine Weight	(7)	kg	10720	11360	11990
Operating Weight	(7)	kg	11040	11680	12310
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	108	108	108
Total Min. Water Flow		l/s	36.2	36.2	36.2
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	47.4	52.1	56.8
Maximum Airflow - AC Fans		m <sup>3</sup> /s	112.9	124.2	135.5
Maximum Airflow - EC Fans		m <sup>3</sup> /s	126.5	139.2	151.9
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	136.7	150.3	164.0
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			20	22	24
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	910	910	910
Maximum Speed - EC Fans		rpm	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			4	4	4
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged				R134a	
Charge (Total) CCT1 + CCT2		kg	360 + 360	365 + 370	380 + 380
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN200	DN200	DN200
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	330	330	330
Minimum System Water Volume	(8)	l	1362	1422	1481
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	41.3	43.6	46.0
Pressure Drop		kPa	17.9	19.7	21.6

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC24R20L-21, TCC24R22L-21, TCC24R24L-21

Electrical

			41	42	43
ELECTRICAL DATA			TCC24R20L-21	TCC24R22L-21	TCC24R24L-21
Unit Data					
Full Load Amps	(1)	A	926	935	943
Maximum Start Amps		A	716	725	733
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	1000	1000	1000
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
Evaporator					
Immersion Heater Rating		W	500 (2x 250)		
External Trace Heating					
Available (fitted by others)		W	500		
Condenser Fan - Per Fan (AC)					
Quantity			20	22	24
Full Load Amps		A	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15
Motor Rating		kW	1.8	1.8	1.8
Condenser Fan - Per Fan (EC)					
Quantity			20	22	24
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)					
Quantity			20	22	24
Full Load Amps		A	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	3.10	3.10	3.10
Compressor - Per Compressor					
Nominal Run Amps		A	210	210	210
Quantity			2	2	2
Motor Rating		kW	129	129	129
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



**Technical Data - TCC (X) TCC11X04S-01, TCC11X06S-01, TCC11X08S-01**

**Mechanical**

Technical Air Cooled

			44	45	46
Mechanical Data	Notes	Units	TCC11X04S-01	TCC11X06S-01	TCC11X08S-01
Cooling Duty - AC Fans	(1)	kW	200	225	235
Nom Input -Cooling Only		kW	59	60	60
EER	(2)		3.39	3.77	3.90
ESEER	(3)		4.73	4.86	4.95
SEER	(3)		4.58	4.73	4.83
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	200	225	235
Nom Input -Cooling Only		kW	58	57	57
EER	(2)		3.48	3.92	4.14
ESEER	(3)		5.12	5.59	5.93
SEER	(3)		4.93	5.40	5.73
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	30-100%	30-100%	30-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 2626	2800 x 2200 x 3758	2800 x 2200 x 4890
Machine Weight	(7)	kg	2730	3345	3935
Operating Weight	(7)	kg	2840	3465	4055
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	22	22	22
Total Min. Water Flow		l/s	7.3	7.3	7.3
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	9.5	14.2	18.9
Maximum Airflow - AC Fans		m <sup>3</sup> /s	17.7	26.5	35.3
Maximum Airflow - EC Fans		m <sup>3</sup> /s	17.7	26.5	35.3
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			4	6	8
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	730	730	730
Maximum Speed - EC Fans		rpm	730	730	730
Maximum Speed - High Airflow EC Fans		rpm	735	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			1	1	1
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged			R134a		
Charge (Total) CCT1 + CCT2		kg	135	145	165
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN100	DN100	DN100
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	102	102	102
Minimum System Water Volume	(8)	l	953	1059	1102
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	7.9	8.9	9.3
Pressure Drop		kPa	19.3	23.4	25.2

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale



Technical Data

TCC11X04S-01, TCC11X06S-01, TCC11X08S-01

Electrical

			44	45	46
ELECTRICAL DATA			TCC11X04S-01	TCC11X06S-01	TCC11X08S-01
<b>Unit Data</b>					
Full Load Amps	(1)	A	145	150	155
Maximum Start Amps		A	2	2	2
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	160	160	200
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>					
Available (fitted by others)		W	500	500	500
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			4	6	8
Full Load Amps		A	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			4	6	8
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	135	135	135
Quantity			1	1	1
Motor Rating		kW	87	87	87
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCC11X06L-02, TCC11X08L-03, TCC11X10L-03

Mechanical

Technical Air Cooled

			47	48	49
Mechanical Data	Notes	Units	TCC11X06L-02	TCC11X08L-03	TCC11X10L-03
Cooling Duty - AC Fans	(1)	kW	350	385	410
Nom Input -Cooling Only		kW	113	113	116
EER	(2)		3.10	3.40	3.53
ESEER	(3)		4.40	4.69	4.76
SEER	(3)		4.22	4.55	4.63
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	350	385	410
Nom Input -Cooling Only		kW	111	110	112
EER	(2)		3.16	3.49	3.65
ESEER	(3)		4.80	5.28	5.54
SEER	(3)		4.57	5.08	5.33
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	30-100%	30-100%	30-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 3758	2800 x 2200 x 4890	2800 x 2200 x 6022
Machine Weight	(7)	kg	3510	4325	4940
Operating Weight	(7)	kg	3650	4465	5080
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	50	28	28
Total Min. Water Flow		l/s	16.7	9.2	9.2
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	14.2	18.9	23.7
Maximum Airflow - AC Fans		m <sup>3</sup> /s	26.5	35.3	44.2
Maximum Airflow - EC Fans		m <sup>3</sup> /s	26.5	35.3	44.2
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			6	8	10
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	730	730	730
Maximum Speed - EC Fans		rpm	730	730	730
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			1	1	1
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged			R134a		
Charge (Total) CCT1 + CCT2		kg	170	320	340
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN100	DN100	DN100
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	126	114	114
Minimum System Water Volume	(8)	l	1616	1752	1858
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	13.9	15.3	16.3
Pressure Drop		kPa	7.0	34.9	38.9

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC11X06L-02, TCC11X08L-03, TCC11X10L-03

Electrical

			47	48	49
ELECTRICAL DATA			TCC11X06L-02	TCC11X08L-03	TCC11X10L-03
<b>Unit Data</b>					
Full Load Amps	(1)	A	225	230	235
Maximum Start Amps		A	2	2	2
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	250	250	250
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	251	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>					
Available (fitted by others)		W	500	500	500
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			6	8	10
Full Load Amps		A	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			6	8	10
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	210	210	210
Quantity			1	1	1
Motor Rating		kW	129	129	129
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCC12X08S-04, TCC12X10S-04, TCC12X12S-04

Mechanical

Technical Air Cooled

			50	51	52
Mechanical Data	Notes	Units	TCC12X08S-04	TCC12X10S-04	TCC12X12S-04
Cooling Duty - AC Fans	(1)	kW	430	460	490
Nom Input -Cooling Only		kW	128	128	132
EER	(2)		3.36	3.59	3.72
ESEER	(3)		4.87	4.96	5.02
SEER	(3)		4.70	4.81	4.87
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	430	460	490
Nom Input -Cooling Only		kW	125	124	127
EER	(2)		3.44	3.70	3.86
ESEER	(3)		5.47	5.68	5.84
SEER	(3)		5.24	5.45	5.61
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 4890	2800 x 2200 x 6022	2800 x 2200 x 7154
Machine Weight	(7)	kg	4720	5335	5950
Operating Weight	(7)	kg	4880	5500	6115
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	41	41	41
Total Min. Water Flow		l/s	13.3	13.3	13.3
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	18.9	23.7	28.4
Maximum Airflow - AC Fans		m <sup>3</sup> /s	35.3	44.2	53.0
Maximum Airflow - EC Fans		m <sup>3</sup> /s	35.3	44.2	53.0
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			8	10	12
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	730	730	730
Maximum Speed - EC Fans		rpm	730	730	730
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged			R134a		
Charge (Total) CCT1 + CCT2		kg	295	310	330
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN125	DN125	DN125
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	141	141	141
Minimum System Water Volume	(8)	l	1056	1119	1183
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	17.1	18.2	19.4
Pressure Drop		kPa	22.4	25.0	27.8

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC12X08S-04, TCC12X10S-04, TCC12X12S-04

Electrical

			50	51	52
ELECTRICAL DATA			TCC12X08S-04	TCC12X10S-04	TCC12X12S-04
<b>Unit Data</b>					
Full Load Amps	(1)	A	290	295	300
Maximum Start Amps		A	155	160	165
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	315	315	315
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>					
Available (fitted by others)		W	500	500	500
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			8	10	12
Full Load Amps		A	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			8	10	12
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	135	135	135
Quantity			2	2	2
Motor Rating		kW	87	87	87
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Air Cooled Technical

Technical Data

TCC12X14S-04, TCC12X10L-05, TCC12X12L-06

Mechanical

Technical Air Cooled

			53	54	55
Mechanical Data	Notes	Units	TCC12X14S-04	TCC12X10L-05	TCC12X12L-06
Cooling Duty - AC Fans	(1)	kW	520	560	630
Nom Input -Cooling Only		kW	138	182	192
EER	(2)		3.78	3.08	3.29
ESEER	(3)		5.04	4.75	4.78
SEER	(3)		4.90	4.57	4.61
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	520	560	630
Nom Input -Cooling Only		kW	132	178	187
EER	(2)		3.93	3.14	3.37
ESEER	(3)		5.92	5.28	5.38
SEER	(3)		5.69	5.05	5.15
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 8286	2800 x 2200 x 6022	2800 x 2200 x 7154
Machine Weight	(7)	kg	6560	5430	6510
Operating Weight	(7)	kg	6735	5625	6760
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	41	50	59
Total Min. Water Flow		l/s	13.3	16.7	19.4
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	33.2	23.7	28.4
Maximum Airflow - AC Fans		m <sup>3</sup> /s	61.9	44.2	53.0
Maximum Airflow - EC Fans		m <sup>3</sup> /s	61.9	44.2	53.0
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			14	10	12
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	730	730	730
Maximum Speed - EC Fans		rpm	730	730	730
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged			R134a		
Charge (Total) CCT1 + CCT2		kg	340	290	445
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN125	DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	141	161	219
Minimum System Water Volume	(8)	l	1247	1352	1560
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	20.6	22.2	25.0
Pressure Drop		kPa	30.8	24.5	22.5

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC12X14S-04, TCC12X10L-05, TCC12X12L-06

Electrical

			53	54	55
ELECTRICAL DATA			TCC12X14S-04	TCC12X10L-05	TCC12X12L-06
<b>Unit Data</b>					
Full Load Amps	(1)	A	305	445	450
Maximum Start Amps		A	170	235	240
Mains Supply		VAC		400V (±10%) 3PH 50Hz	
Recommended Mains Fuse Size		A	315	500	500
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>		2x 300mm <sup>2</sup> (Torque >20Nm)	
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply				230V 1PH 50Hz (±10%)	
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>		6mm <sup>2</sup> / 8 AWG	
Control Circuit		VAC		24 VAC & 230VAC (±10%)	
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>					
Available (fitted by others)		W	500	500	500
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			14	10	12
Full Load Amps		A	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			14	10	12
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	135	210	210
Quantity			2	2	2
Motor Rating		kW	87	129	129
Start Amps		A	2	2	2
Type Of Start				Electronic Soft Start	

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCC12X14L-06, TCC12X16L-06, TCC12X18L-06, TCC12X20L-06

Mechanical

Technical Air Cooled

			56	57	58	59
Mechanical Data	Notes	Units	TCC12X14L-06	TCC12X16L-06	TCC12X18L-06	TCC12X20L-06
Cooling Duty - AC Fans	(1)	kW	710	760	810	860
Nom Input -Cooling Only		kW	211	221	234	252
EER	(2)		3.37	3.43	3.46	3.41
ESEER	(3)		4.87	4.93	4.95	4.95
SEER	(3)		4.70	4.76	4.79	4.79
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	710	760	810	860
Nom Input -Cooling Only		kW	205	215	227	245
EER	(2)		3.46	3.53	3.56	3.52
ESEER	(3)		5.51	5.63	5.69	5.71
SEER	(3)		5.28	5.39	5.45	5.47
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 8286	2800 x 2200 x 9418	2800 x 2200 x 10550	2800 x 2200 x 11682
Machine Weight	(7)	kg	7120	7755	8355	8975
Operating Weight	(7)	kg	7365	8010	8610	9235
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)			
Evaporator - Type			Flooded - Shell and Tube Evaporator			
Insulation			Class O, UV stable Insulation			
Total Max. Water Flow		l/s	59	59	59	59
Total Min. Water Flow		l/s	19.4	19.4	19.4	19.4
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins			
Face Area Total		m <sup>2</sup>	33.2	37.9	42.6	47.4
Maximum Airflow - AC Fans		m <sup>3</sup> /s	61.9	70.7	79.5	88.4
Maximum Airflow - EC Fans		m <sup>3</sup> /s	61.9	70.7	79.5	88.4
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan			
Quantity			14	16	18	20
Diameter		mm	800	800	800	800
Maximum Speed - AC Fans		rpm	730	730	730	730
Maximum Speed - EC Fans		rpm	730	730	730	730
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor			
Quantity			2	2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation			
Refrigeration			Single Circuit	Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged			R134a			
Charge (Total) CCT1 + CCT2		kg	460	475	480	495
Refrigeration Control			Electronic Expansion Valve (EEV)			
Water System			Grooved Type Coupling and Pipe Assembly			
Water Inlet / Outlet			DN150	DN150	DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2	1/2
Water Volume		l	219	219	219	219
Minimum System Water Volume	(8)	l	1730	1836	1943	2049
Max System Operating Pressure		Barg	10	10	10	10
Flow Rate		l/s	28.2	30.1	32.1	34.1
Pressure Drop		kPa	27.6	31.1	34.8	38.7

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale



Technical Data

TCC12X14L-06, TCC12X16L-06, TCC12X18L-06, TCC12X20L-06

Electrical

			56	57	58	59
ELECTRICAL DATA			TCC12X14L-06	TCC12X16L-06	TCC12X18L-06	TCC12X20L-06
Unit Data						
Full Load Amps	(1)	A	455	460	465	470
Maximum Start Amps		A	245	250	255	260
Mains Supply		VAC	400V (±10%) 3PH 50Hz			
Recommended Mains Fuse Size		A	500	500	500	500
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)			
Independent Permanent Supply Recommended Fuse Size		A	25	25	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)			
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG			
Control Circuit		VAC	24 VAC & 230VAC (±10%)			
Evaporator						
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)	500 (2x 250)
External Trace Heating						
Available (fitted by others)		W	500	500	500	500
Condenser Fan - Per Fan (AC)						
Quantity			14	16	18	20
Full Load Amps		A	2.5	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3	1.27
Condenser Fan - Per Fan (EC)						
Quantity			14	16	18	20
Full Load Amps		A	3.9	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)						
Quantity			N/A	N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A	N/A
Compressor - Per Compressor						
Nominal Run Amps		A	210	210	210	210
Quantity			2	2	2	2
Motor Rating		kW	129	129	129	129
Start Amps		A	2	2	2	2
Type Of Start			Electronic Soft Start			

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Air Cooled Technical

Technical Data

TCC22X08S-14, TCC22X10S-14, TCC22X12S-14, TCC22X14S-14

Mechanical

Technical Air Cooled

			60	61	62	63
Mechanical Data	Notes	Units	TCC22X08S-14	TCC22X10S-14	TCC22X12S-14	TCC22X14S-14
Cooling Duty - AC Fans	(1)	kW	430	460	490	520
Nom Input -Cooling Only		kW	128	128	131	138
EER	(2)		3.36	3.59	3.73	3.78
ESEER	(3)		4.57	4.79	4.85	4.92
SEER	(3)		4.44	4.66	4.72	4.80
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	430	460	490	520
Nom Input -Cooling Only		kW	125	124	127	132
EER	(2)		3.44	3.70	3.86	3.93
ESEER	(3)		4.84	5.27	5.45	5.62
SEER	(3)		4.69	5.09	5.27	5.43
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 4890	2800 x 2200 x 6022	2800 x 2200 x 7154	2800 x 2200 x 8286
Machine Weight	(7)	kg	4770	5390	6020	6640
Operating Weight	(7)	kg	4910	5530	6160	6780
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)			
Evaporator - Type			Flooded - Shell and Tube Evaporator			
Insulation			Class O, UV stable Insulation			
Total Max. Water Flow		l/s	44	44	44	44
Total Min. Water Flow		l/s	14.6	14.6	14.6	14.6
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins			
Face Area Total		m <sup>2</sup>	18.9	23.7	28.4	33.2
Maximum Airflow - AC Fans		m <sup>3</sup> /s	35.3	44.2	53.0	61.9
Maximum Airflow - EC Fans		m <sup>3</sup> /s	35.3	44.2	53.0	61.9
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan			
Quantity			8	10	12	14
Diameter		mm	800	800	800	800
Maximum Speed - AC Fans		rpm	730	730	730	730
Maximum Speed - EC Fans		rpm	730	730	730	730
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor			
Quantity			2	2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation			
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a			
Charge (Total) CCT1 + CCT2		kg	155 + 150	160 + 160	170 + 165	180 + 170
Refrigeration Control			Electronic Expansion Valve (EEV)			
Water System			Grooved Type Coupling and Pipe Assembly			
Water Inlet / Outlet			DN125	DN125	DN125	DN125
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2	1/2
Water Volume		l	148	148	148	148
Minimum System Water Volume	(8)	l	1062	1126	1190	1254
Max System Operating Pressure		Barg	10	10	10	10
Flow Rate		l/s	17.1	18.2	19.4	20.6
Pressure Drop		kPa	19.2	21.7	24.2	26.9

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC22X08S-14, TCC22X10S-14, TCC22X12S-14, TCC22X14S-14

Electrical

			60	61	62	63
ELECTRICAL DATA			TCC22X08S-14	TCC22X10S-14	TCC22X12S-14	TCC22X14S-14
Unit Data						
Full Load Amps	(1)	A	290	295	300	305
Maximum Start Amps		A	155	160	165	170
Mains Supply		VAC	400V (±10%) 3PH 50Hz			
Recommended Mains Fuse Size		A	315	315	315	315
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)			
Independent Permanent Supply Recommended Fuse Size		A	25	25	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)			
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG			
Control Circuit		VAC	24 VAC & 230VAC (±10%)			
Evaporator						
Immersion Heater Rating		W	500 (2x 250)			
External Trace Heating						
Available (fitted by others)		W	500			
Condenser Fan - Per Fan (AC)						
Quantity			8	10	12	14
Full Load Amps		A	2.5	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3	1.3
Condenser Fan - Per Fan (EC)						
Quantity			8	10	12	14
Full Load Amps		A	3.9	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)						
Quantity			N/A	N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A	N/A
Compressor - Per Compressor						
Nominal Run Amps		A	135	135	135	135
Quantity			1	1	1	1
Motor Rating		kW	87	87	87	87
Start Amps		A	2	2	2	2
Type Of Start			Electronic Soft Start			

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCC22X10L-15, TCC22X12L-15, TCC22X14L-15

Mechanical

Technical Air Cooled

			64	65	66
Mechanical Data	Notes	Units	TCC22X10L-15	TCC22X12L-15	TCC22X14L-15
Cooling Duty - AC Fans	(1)	kW	560	630	710
Nom Input -Cooling Only		kW	182	192	211
EER	(2)		3.08	3.28	3.36
ESEER	(3)		4.24	4.44	4.58
SEER	(3)		4.11	4.31	4.45
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	560	630	710
Nom Input -Cooling Only		kW	178	187	206
EER	(2)		3.15	3.36	3.45
ESEER	(3)		4.45	4.79	4.97
SEER	(3)		4.31	4.63	4.80
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 6022	2800 x 2200 x 7154	2800 x 2200 x 8286
Machine Weight	(7)	kg	5910	6540	7180
Operating Weight	(7)	kg	6120	6750	7390
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	59	59	59
Total Min. Water Flow		l/s	19.7	19.7	19.7
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m²	23.7	28.4	33.2
Maximum Airflow - AC Fans		m³/s	44.2	53.0	61.9
Maximum Airflow - EC Fans		m³/s	44.2	53.0	61.9
Maximum Airflow - High Airflow EC Fans		m³/s	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			10	12	14
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	730	730	730
Maximum Speed - EC Fans		rpm	730	730	730
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged				R134a	
Charge (Total) CCT1 + CCT2		kg	220 + 220	230 + 225	235 + 230
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN150	DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	219	219	219
Minimum System Water Volume	(8)	l	1411	1560	1730
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	22.2	25.0	28.2
Pressure Drop		kPa	18.0	22.2	27.4

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC22X10L-15, TCC22X12L-15, TCC22X14L-15

Electrical

			64	65	66
ELECTRICAL DATA			TCC22X10L-15	TCC22X12L-15	TCC22X14L-15
Unit Data					
Full Load Amps	(1)	A	445	450	455
Maximum Start Amps		A	235	240	245
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	500	500	500
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
Evaporator					
Immersion Heater Rating		W	500 (2x 250)		
External Trace Heating					
Available (fitted by others)		W	500		
Condenser Fan - Per Fan (AC)					
Quantity			10	12	14
Full Load Amps		A	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3
Condenser Fan - Per Fan (EC)					
Quantity			10	12	14
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)					
Quantity			N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A
Compressor - Per Compressor					
Nominal Run Amps		A	210	210	210
Quantity			1	1	2
Motor Rating		kW	129	129	129
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Air Cooled Technical

Technical Data

TCC22X16L-16, TCC22X18L-16, TCC22X20L-16

Mechanical

Technical Air Cooled

			67	68	69
Mechanical Data	Notes	Units	TCC22X16L-16	TCC22X18L-16	TCC22X20L-16
Cooling Duty - AC Fans	(1)	kW	760	810	860
Nom Input -Cooling Only		kW	221	234	252
EER	(2)		3.44	3.46	3.41
ESEER	(3)		4.69	4.78	4.85
SEER	(3)		4.56	4.64	4.70
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	760	810	860
Nom Input -Cooling Only		kW	215	227	244
EER	(2)		3.53	3.57	3.52
ESEER	(3)		5.15	5.30	5.42
SEER	(3)		4.97	5.11	5.21
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 9418	2800 x 2200 x 10550	2800 x 2200 x 11682
Machine Weight	(7)	kg	7790	8400	9010
Operating Weight	(7)	kg	8010	8620	9230
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	63	63	63
Total Min. Water Flow		l/s	20.9	20.9	20.9
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	37.9	42.6	47.4
Maximum Airflow - AC Fans		m <sup>3</sup> /s	70.7	79.5	88.4
Maximum Airflow - EC Fans		m <sup>3</sup> /s	70.7	79.5	88.4
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			16	18	20
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	730	730	730
Maximum Speed - EC Fans		rpm	730	730	730
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged				R134a	
Charge (Total) CCT1 + CCT2		kg	235 + 230	240 + 235	250 + 245
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN150	DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	227	227	227
Minimum System Water Volume	(8)	l	1844	1951	2057
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	30.1	32.1	34.1
Pressure Drop		kPa	27.7	31.0	34.5

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC22X16L-16, TCC22X18L-16, TCC22X20L-16

Electrical

			67	68	69
ELECTRICAL DATA			TCC22X16L-16	TCC22X18L-16	TCC22X20L-16
Unit Data					
Full Load Amps	(1)	A	460	465	470
Maximum Start Amps		A	250	255	260
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	500	500	500
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
Evaporator					
Immersion Heater Rating		W	500 (2x 250)		
External Trace Heating					
Available (fitted by others)		W	500		
Condenser Fan - Per Fan (AC)					
Quantity			16	18	20
Full Load Amps		A	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3
Condenser Fan - Per Fan (EC)					
Quantity			16	18	20
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)					
Quantity			N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A
Compressor - Per Compressor					
Nominal Run Amps		A	210	210	210
Quantity			2	2	2
Motor Rating		kW	129	129	129
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Air Cooled Technical

Technical Data

TCC23X12S-17, TCC23X14S-17, TCC23X16S-17, TCC23X18S-17

Mechanical

Technical Air Cooled

			70	71	72	73
Mechanical Data	Notes	Units	TCC23X12S-17	TCC23X14S-17	TCC23X16S-17	TCC23X18S-17
Cooling Duty - AC Fans	(1)	kW	590	640	690	740
Nom Input -Cooling Only		kW	173	180	189	199
EER	(2)		3.41	3.56	3.66	3.72
ESEER	(3)		4.82	4.91	4.95	5.01
SEER	(3)		4.66	4.76	4.81	4.86
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	590	640	690	740
Nom Input -Cooling Only		kW	168	175	183	192
EER	(2)		3.50	3.67	3.78	3.86
ESEER	(3)		5.37	5.50	5.59	5.69
SEER	(3)		5.16	5.30	5.38	5.48
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Capacity Steps	(6)	%	10-100%	10-100%	10-100%	10-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 7154	2800 x 2200 x 8286	2800 x 2200 x 9418	2800 x 2200 x 10550
Machine Weight	(7)	kg	6940	7560	8190	8820
Operating Weight	(7)	kg	7170	7790	8420	9050
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)			
Evaporator - Type			Flooded - Shell and Tube Evaporator			
Insulation			Class O, UV stable Insulation			
Total Max. Water Flow		l/s	67	67	67	67
Total Min. Water Flow		l/s	22.3	22.3	22.3	22.3
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins			
Face Area Total		m²	28.4	33.2	37.9	42.6
Maximum Airflow - AC Fans		m³/s	53.0	61.9	70.7	79.5
Maximum Airflow - EC Fans		m³/s	53.0	61.9	70.7	79.5
Maximum Airflow - High Airflow EC Fans		m³/s	N/A	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan			
Quantity			12	14	16	18
Diameter		mm	800	800	800	800
Maximum Speed - AC Fans		rpm	730	730	730	730
Maximum Speed - EC Fans		rpm	730	730	730	730
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor			
Quantity			3	3	3	3
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation			
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a			
Charge (Total) CCT1 + CCT2		kg	330 + 170	340 + 175	355 + 180	355 + 185
Refrigeration Control			Electronic Expansion Valve (EEV)			
Water System			Grooved Type Coupling and Pipe Assembly			
Water Inlet / Outlet			DN150	DN150	DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2	1/2
Water Volume		l	235	235	235	235
Minimum System Water Volume	(8)	l	1072	1143	1214	1285
Max System Operating Pressure		Barg	10	10	10	10
Flow Rate		l/s	23.4	25.4	27.4	29.4
Pressure Drop		kPa	15.8	18.3	21.0	23.8

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale



Technical Data

TCC23X12S-17, TCC23X14S-17, TCC23X16S-17, TCC23X18S-17

Electrical

			70	71	72	73
ELECTRICAL DATA			TCC23X12S-17	TCC23X14S-17	TCC23X16S-17	TCC23X18S-17
Unit Data						
Full Load Amps	(1)	A	435	440	445	450
Maximum Start Amps		A	300	305	310	315
Mains Supply		VAC	400V (±10%) 3PH 50Hz			
Recommended Mains Fuse Size		A	450	500	500	500
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)			
Independent Permanent Supply Recommended Fuse Size		A	25	25	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)			
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG			
Control Circuit		VAC	24 VAC & 230VAC (±10%)			
Evaporator						
Immersion Heater Rating		W	500 (2x 250)			
External Trace Heating						
Available (fitted by others)		W	500			
Condenser Fan - Per Fan (AC)						
Quantity			12	14	16	18
Full Load Amps		A	2.5	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3	1.3
Condenser Fan - Per Fan (EC)						
Quantity			12	14	16	18
Full Load Amps		A	3.9	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)						
Quantity			N/A	N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A	N/A
Compressor - Per Compressor						
Nominal Run Amps		A	135	135	135	135
Quantity			2	2	2	2
Motor Rating		kW	87	87	87	87
Start Amps		A	2	2	2	2
Type Of Start			Electronic Soft Start			

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Air Cooled Technical

Technical Data

TCC23X16L-19, TCC23X18L-19

Mechanical

Technical Air Cooled

			74	75
Mechanical Data	Notes	Units	TCC23X16L-19	TCC23X18L-19
Cooling Duty - AC Fans	(1)	kW	780	840
Nom Input -Cooling Only		kW	244	252
EER	(2)		3.20	3.34
ESEER	(3)		4.75	4.79
SEER	(3)		4.57	4.63
Nominal Output - Free Cooling	(4)	kW	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	780	840
Nom Input -Cooling Only		kW	238	245
EER	(2)		3.28	3.43
ESEER	(3)		5.20	5.30
SEER	(3)		4.99	5.09
Nominal Output - Free Cooling	(4)	kW	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A
EER	(2)		N/A	N/A
ESEER	(3)		N/A	N/A
SEER	(3)		N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A
Capacity Steps	(6)	%	10-100%	10-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 9418	2800 x 2200 x 10550
Machine Weight	(7)	kg	8920	9550
Operating Weight	(7)	kg	9200	9830
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)	
Evaporator - Type			Flooded - Shell and Tube Evaporator	
Insulation			Class O, UV stable Insulation	
Total Max. Water Flow		l/s	86	86
Total Min. Water Flow		l/s	28.8	28.8
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins	
Face Area Total		m <sup>2</sup>	37.9	42.6
Maximum Airflow - AC Fans		m <sup>3</sup> /s	70.7	79.5
Maximum Airflow - EC Fans		m <sup>3</sup> /s	70.7	79.5
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan	
Quantity			16	18
Diameter		mm	800	800
Maximum Speed - AC Fans		rpm	730	730
Maximum Speed - EC Fans		rpm	730	730
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor	
Quantity			3	3
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation	
Refrigeration			Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a	
Charge (Total) CCT1 + CCT2		kg	460 + 225	465 + 235
Refrigeration Control			Electronic Expansion Valve (EEV)	
Water System			Grooved Type Coupling and Pipe Assembly	
Water Inlet / Outlet			DN200	DN200
Water Drain / Bleed - Evap		inch	1/2	1/2
Water Volume		l	282	282
Minimum System Water Volume	(8)	l	1389	1474
Max System Operating Pressure		Barg	10	10
Flow Rate		l/s	30.9	33.3
Pressure Drop		kPa	16.2	18.6

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC23X16L-19, TCC23X18L-19

Electrical

			74	75
ELECTRICAL DATA			TCC23X16L-19	TCC23X18L-19
Unit Data				
Full Load Amps	(1)	A	670	675
Maximum Start Amps		A	460	465
Mains Supply		VAC	400V (±10%) 3PH 50Hz	
Recommended Mains Fuse Size		A	710	710
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)	
Independent Permanent Supply Recommended Fuse Size		A	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)	
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG	
Control Circuit		VAC	24 VAC & 230VAC (±10%)	
Evaporator				
Immersion Heater Rating		W	500 (2x 250)	
External Trace Heating				
Available (fitted by others)		W	500	
Condenser Fan - Per Fan (AC)				
Quantity			16	18
Full Load Amps		A	2.5	2.5
Locked Rotor Amps		A	8.8	8.8
Motor Rating		kW	1.3	1.3
Condenser Fan - Per Fan (EC)				
Quantity			16	18
Full Load Amps		A	3.9	3.9
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)				
Quantity			N/A	N/A
Full Load Amps		A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	N/A	N/A
Compressor - Per Compressor				
Nominal Run Amps		A	210	210
Quantity			2	2
Motor Rating		kW	129	129
Start Amps		A	2	2
Type Of Start			Electronic Soft Start	

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCC23X20L-20, TCC23X22L-20, TCC23X24L-20

Mechanical

Technical Air Cooled

			76	77	78
Mechanical Data	Notes	Units	TCC23X20L-20	TCC23X22L-20	TCC23X24L-20
Cooling Duty - AC Fans	(1)	kW	900	960	1020
Nom Input -Cooling Only		kW	262	272	286
EER	(2)		3.44	3.53	3.57
ESEER	(3)		4.81	4.84	4.90
SEER	(3)		4.66	4.69	4.75
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	900	960	1020
Nom Input -Cooling Only		kW	254	264	276
EER	(2)		3.54	3.64	3.69
ESEER	(3)		5.40	5.46	5.55
SEER	(3)		5.19	5.25	5.33
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	10-100%	10-100%	10-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 11682	2800 x 2200 x 12814	2800 x 2200 x 13946
Machine Weight	(7)	kg	10200	10810	11460
Operating Weight	(7)	kg	10490	11100	11750
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	91	91	91
Total Min. Water Flow		l/s	30.4	30.4	30.4
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	47.4	52.1	56.8
Maximum Airflow - AC Fans		m <sup>3</sup> /s	88.4	97.2	106.0
Maximum Airflow - EC Fans		m <sup>3</sup> /s	88.4	97.2	106.0
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			20	22	24
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	730	730	730
Maximum Speed - EC Fans		rpm	730	730	730
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			3	3	3
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged				R134a	
Charge (Total) CCT1 + CCT2		kg	465 + 235	475 + 235	480 + 250
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN200	DN200	DN200
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	292	292	292
Minimum System Water Volume	(8)	l	1568	1653	1739
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	35.7	38.1	40.5
Pressure Drop		kPa	19.2	21.6	24.1

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC23X20L-20, TCC23X22L-20, TCC23X24L-20

Electrical

			76	77	78
ELECTRICAL DATA			TCC23X20L-20	TCC23X22L-20	TCC23X24L-20
<b>Unit Data</b>					
Full Load Amps	(1)	A	680	685	690
Maximum Start Amps		A	470	475	480
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	710	710	710
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)		
<b>External Trace Heating</b>					
Available (fitted by others)		W	500		
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			20	22	24
Full Load Amps		A	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			20	22	24
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	210	210	210
Quantity			2	2	2
Motor Rating		kW	129	129	129
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Air Cooled Technical

Technical Data

TCC24X16S-18, TCC24X18S-18, TCC24X20S-18

Mechanical

			79	80	81
Mechanical Data	Notes	Units	TCC24X16S-18	TCC24X18S-18	TCC24X20S-18
Cooling Duty - AC Fans	(1)	kW	790	820	860
Nom Input -Cooling Only		kW	232	232	237
EER	(2)		3.4	3.5	3.6
ESEER	(3)		4.93	4.95	4.99
SEER	(3)		4.76	4.79	4.84
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	790	820	860
Nom Input -Cooling Only		kW	226	225	230
EER	(2)		3.5	3.6	3.7
ESEER	(3)		5.43	5.65	5.75
SEER	(3)		5.21	5.42	5.52
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	7.5-100%	7.5-100%	7.5-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 9418	2800 x 2200 x 10550	2800 x 2200 x 11682
Machine Weight	(7)	kg	8580	9210	9860
Operating Weight	(7)	kg	8830	9460	10110
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	78	78	78
Total Min. Water Flow		l/s	25.8	25.8	25.8
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	37.9	42.6	47.4
Maximum Airflow - AC Fans		m <sup>3</sup> /s	70.7	79.5	88.4
Maximum Airflow - EC Fans		m <sup>3</sup> /s	70.7	79.5	88.4
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			16	18	20
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	730	730	730
Maximum Speed - EC Fans		rpm	730	730	730
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			4	4	4
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Dual Circuit R134a		
Refrigerant Pre-charged					
Charge (Total) CCT1 + CCT2		kg	250 + 250	260 + 250	270 + 265
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN200	DN200	DN200
Water Drain / Bleed - Evap		inch	0.5	0.5	0.5
Water Volume		l	260	260	260
Minimum System Water Volume	(8)	l	1044	1074	1114
Max System Operating Pressure		Barg	10.0	10.0	10.0
Flow Rate		l/s	31.3	32.5	34.1
Pressure Drop		kPa	20.1	21.5	23.4

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC24X16S-18, TCC24X18S-18, TCC24X20S-18

Electrical

			79	80	81
ELECTRICAL DATA			TCC24X16S-18	TCC24X18S-18	TCC24X20S-18
<b>Unit Data</b>					
Full Load Amps	(1)	A	580	585	590
Maximum Start Amps		A	445	450	455
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	630	630	630
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)		
<b>External Trace Heating</b>					
Available (fitted by others)		W	500		
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			16	18	20
Full Load Amps		A	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			16	18	20
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	135	135	135
Quantity			2	2	2
Motor Rating		kW	87	87	87
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCC24X22S-18, TCC24X24S-18

Mechanical

Technical Air Cooled

			82	83
Mechanical Data	Notes	Units	TCC24X22S-18	TCC24X24S-18
Cooling Duty - AC Fans	(1)	kW	910	960
Nom Input -Cooling Only		kW	247	258
EER	(2)		3.69	3.73
ESEER	(3)		5.02	5.03
SEER	(3)		4.87	4.88
Nominal Output - Free Cooling	(4)	kW	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	910	960
Nom Input -Cooling Only		kW	238	249
EER	(2)		3.82	3.86
ESEER	(3)		5.82	5.86
SEER	(3)		5.59	5.63
Nominal Output - Free Cooling	(4)	kW	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A
EER	(2)		N/A	N/A
ESEER	(3)		N/A	N/A
SEER	(3)		N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A
Capacity Steps	(6)	%	7.5-100%	7.5-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 12814	2800 x 2200 x 13946
Machine Weight	(7)	kg	10480	11110
Operating Weight	(7)	kg	10730	11360
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)	
Evaporator - Type			Flooded - Shell and Tube Evaporator	
Insulation			Class O, UV stable Insulation	
Total Max. Water Flow		l/s	78	78
Total Min. Water Flow		l/s	25.8	25.8
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins	
Face Area Total		m <sup>2</sup>	52.1	56.8
Maximum Airflow - AC Fans		m <sup>3</sup> /s	97.2	106.0
Maximum Airflow - EC Fans		m <sup>3</sup> /s	97.2	106.0
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan	
Quantity			22	24
Diameter		mm	800	800
Maximum Speed - AC Fans		rpm	730	730
Maximum Speed - EC Fans		rpm	730	730
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor	
Quantity			4	4
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation	
Refrigeration			Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a	
Charge (Total) CCT1 + CCT2		kg	270 + 275	285 + 280
Refrigeration Control			Electronic Expansion Valve (EEV)	
Water System			Grooved Type Coupling and Pipe Assembly	
Water Inlet / Outlet			DN200	DN200
Water Drain / Bleed - Evap		inch	1/2	1/2
Water Volume		l	260	260
Minimum System Water Volume	(8)	l	1163	1213
Max System Operating Pressure		Barg	10	10
Flow Rate		l/s	36.1	38.1
Pressure Drop		kPa	25.8	28.4

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedate.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedate



Technical Data

TCC24X22S-18, TCC24X24S-18

Electrical

			82	83
ELECTRICAL DATA			TCC24X22S-18	TCC24X24S-18
Unit Data				
Full Load Amps	(1)	A	595	600
Maximum Start Amps		A	460	465
Mains Supply		VAC	400V (±10%) 3PH 50Hz	
Recommended Mains Fuse Size		A	630	630
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)	
Independent Permanent Supply Recommended Fuse Size		A	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)	
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG	
Control Circuit		VAC	24 VAC & 230VAC (±10%)	
Evaporator				
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)
External Trace Heating				
Available (fitted by others)		W	500	500
Condenser Fan - Per Fan (AC)				
Quantity			22	24
Full Load Amps		A	2.5	2.5
Locked Rotor Amps		A	8.8	8.8
Motor Rating		kW	1.3	1.3
Condenser Fan - Per Fan (EC)				
Quantity			22	24
Full Load Amps		A	3.9	3.9
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)				
Quantity			N/A	N/A
Full Load Amps		A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	N/A	N/A
Compressor - Per Compressor				
Nominal Run Amps		A	135	135
Quantity			2	2
Motor Rating		kW	87	87
Start Amps		A	2	2
Type Of Start			Electronic Soft Start	

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCC24X20L-21, TCC24X22L-21, TCC24X24L-21

Mechanical

Technical Air Cooled

			84	85	86
Mechanical Data	Notes	Units	TCC24X20L-21	TCC24X22L-21	TCC24X24L-21
Cooling Duty - AC Fans	(1)	kW	1000	1040	1080
Nom Input -Cooling Only		kW	324	321	324
EER	(2)		3.09	3.24	3.34
ESEER	(3)		4.90	4.93	4.96
SEER	(3)		4.71	4.75	4.78
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - EC Fans	(1)	kW	1000	1040	1080
Nom Input -Cooling Only		kW	316	313	315
EER	(2)		3.16	3.33	3.43
ESEER	(3)		5.38	5.46	5.53
SEER	(3)		5.15	5.23	5.30
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	7.5-100%	7.5-100%	7.5-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 11682	2800 x 2200 x 12814	2800 x 2200 x 13946
Machine Weight	(7)	kg	10720	11360	11990
Operating Weight	(7)	kg	11040	11680	12310
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	108	108	108
Total Min. Water Flow		l/s	36.2	36.2	36.2
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	47.4	52.1	56.8
Maximum Airflow - AC Fans		m <sup>3</sup> /s	88.4	97.2	106.0
Maximum Airflow - EC Fans		m <sup>3</sup> /s	88.4	97.2	106.0
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			20	22	24
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	730	730	730
Maximum Speed - EC Fans		rpm	730	730	730
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			4	4	4
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged				R134a	
Charge (Total) CCT1 + CCT2		kg	360 + 360	365 + 370	380 + 380
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN200	DN200	DN200
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	330	330	330
Minimum System Water Volume	(8)	l	1322	1362	1402
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	39.7	41.3	42.8
Pressure Drop		kPa	16.7	17.9	19.1

(1) Based on AC units performance at 13/7°C return/supply temperatures, 35°C ambient, 100% water. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC24X20L-21, TCC24X22L-21, TCC24X24L-21

Electrical

			84	85	86
ELECTRICAL DATA			TCC24X20L-21	TCC24X22L-21	TCC24X24L-21
<b>Unit Data</b>					
Full Load Amps	(1)	A	890	895	900
Maximum Start Amps		A	680	685	690
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	1000	1000	1000
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)		
<b>External Trace Heating</b>					
Available (fitted by others)		W	500		
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			20	22	24
Full Load Amps		A	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			20	22	24
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	210	210	210
Quantity			2	2	2
Motor Rating		kW	129	129	129
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Air Cooled Technical

Sound Data - TCC

TCC - AC Fans

Technical Air Cooled

		AC								
		Single Octave Sound Levels (dB)								Overall [dB(A)]
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCC11R04S-01	Sound Power	86	85	84	80	80	75	77	81	86
	Sound Pressure @10m	53	53	52	48	47	43	45	49	54
TCC11R06S-01	Sound Power	87	87	86	81	81	76	77	81	87
	Sound Pressure @10m	55	54	53	49	48	43	45	49	54
TCC11R08S-01	Sound Power	84	85	85	80	79	75	77	81	86
	Sound Pressure @10m	52	52	52	47	46	42	45	49	53
TCC11R06L-02	Sound Power	87	87	86	82	83	77	76	80	87
	Sound Pressure @10m	55	54	53	49	51	45	44	47	55
TCC11R08L-03	Sound Power	89	88	87	83	84	78	76	80	88
	Sound Pressure @10m	56	55	54	50	51	45	44	47	55
TCC11R10L-03	Sound Power	90	89	88	84	84	78	77	80	88
	Sound Pressure @10m	57	56	55	51	51	45	44	47	55
TCC12R08S-04	Sound Power	89	88	87	83	83	78	80	84	89
	Sound Pressure @10m	56	55	55	50	50	45	48	52	56
TCC12R10S-04	Sound Power	90	89	88	84	83	78	80	84	89
	Sound Pressure @10m	57	56	55	51	50	45	48	51	56
TCC12R12S-04	Sound Power	90	90	89	84	84	79	80	84	90
	Sound Pressure @10m	57	56	56	51	51	46	47	51	57
TCC12R14S-04	Sound Power	91	90	89	85	84	79	81	84	90
	Sound Pressure @10m	58	57	56	51	51	46	47	51	57
TCC12R10L-05	Sound Power	90	89	88	84	86	80	79	83	90
	Sound Pressure @10m	57	56	55	51	53	47	46	50	57
TCC12R12L-06	Sound Power	90	90	89	85	86	80	79	83	90
	Sound Pressure @10m	57	56	56	52	53	47	46	50	57
TCC12R14L-06	Sound Power	91	90	89	85	87	80	79	83	91
	Sound Pressure @10m	58	57	56	52	53	47	46	49	57
TCC12R16L-06	Sound Power	92	91	90	86	87	81	79	83	91
	Sound Pressure @10m	58	57	56	52	53	47	46	49	57
TCC12R18L-06	Sound Power	92	91	90	86	87	81	79	83	91
	Sound Pressure @10m	58	58	57	52	53	47	46	49	57

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 13/7°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Sound Data - TCC

TCC - AC Fans

		AC								Overall [dB(A)]
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCC12R20L-06	Sound Power	93	92	91	87	87	81	80	83	91
	Sound Pressure @10m	59	58	57	53	53	47	46	49	57
TCC22R08S-14	Sound Power	89	88	87	83	83	78	80	84	89
	Sound Pressure @10m	56	55	55	50	50	45	48	52	56
TCC22R10S-14	Sound Power	90	89	88	84	83	78	80	84	89
	Sound Pressure @10m	57	56	55	51	50	45	48	51	56
TCC22R12S-14	Sound Power	90	90	89	84	84	79	80	84	90
	Sound Pressure @10m	57	56	56	51	51	46	47	51	57
TCC22R14S-14	Sound Power	91	90	89	85	84	79	81	84	90
	Sound Pressure @10m	58	57	56	51	51	46	47	51	57
TCC22R10L-15	Sound Power	90	89	88	84	86	80	79	83	90
	Sound Pressure @10m	57	56	55	51	53	47	46	50	57
TCC22R12L-15	Sound Power	90	90	89	85	86	80	79	83	90
	Sound Pressure @10m	57	56	56	52	53	47	46	50	57
TCC22R14L-15	Sound Power	91	90	89	85	87	80	79	83	91
	Sound Pressure @10m	58	57	56	52	53	47	46	49	57
TCC22R16L-16	Sound Power	92	91	90	86	87	81	79	83	91
	Sound Pressure @10m	58	57	56	52	53	47	46	49	57
TCC22R18L-16	Sound Power	92	91	90	86	87	81	79	83	91
	Sound Pressure @10m	58	58	57	52	53	47	46	49	57
TCC22R20L-16	Sound Power	93	92	91	87	87	81	80	83	91
	Sound Pressure @10m	59	58	57	53	53	47	46	49	57
TCC23R12S-17	Sound Power	90	90	89	85	84	80	82	86	91
	Sound Pressure @10m	57	56	56	51	51	47	49	53	58
TCC23R14S-17	Sound Power	91	90	90	85	85	80	82	86	91
	Sound Pressure @10m	58	57	56	52	51	47	49	53	58
TCC23R16S-17	Sound Power	92	91	90	86	85	80	82	86	91
	Sound Pressure @10m	58	57	57	52	52	47	49	52	58
TCC23R18S-17	Sound Power	92	91	91	86	85	81	82	86	91
	Sound Pressure @10m	58	58	57	52	52	47	49	52	58
TCC23R16L-19	Sound Power	92	91	90	86	88	81	81	84	92
	Sound Pressure @10m	58	57	56	53	54	48	47	51	58
TCC23R18L-19	Sound Power	92	91	90	87	88	82	81	84	92
	Sound Pressure @10m	58	58	57	53	54	48	47	51	58

Air Cooled  
Technical

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 13/7°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Sound Data - TCC

TCC - AC Fans

Technical Air Cooled

		AC								
		Single Octave Sound Levels (dB)								Overall [dB(A)]
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCC23R20L-20	Sound Power	93	92	91	87	88	82	81	84	92
	Sound Pressure @10m	59	58	57	53	54	48	47	51	58
TCC23R22L-20	Sound Power	93	92	91	87	88	82	81	84	92
	Sound Pressure @10m	59	58	57	53	54	48	47	50	58
TCC23R24L-20	Sound Power	93	93	92	88	89	82	81	84	93
	Sound Pressure @10m	59	58	57	53	54	48	47	50	58
TCC24R16S-18	Sound Power	92	91	90	86	86	81	83	87	92
	Sound Pressure @10m	58	57	57	52	52	47	50	54	58
TCC24R18S-18	Sound Power	92	91	91	86	86	81	83	87	92
	Sound Pressure @10m	58	58	57	53	52	47	50	54	58
TCC24R20S-18	Sound Power	93	92	91	87	86	81	83	87	92
	Sound Pressure @10m	59	58	57	53	52	47	50	53	58
TCC24R22S-18	Sound Power	93	92	92	87	86	82	83	87	93
	Sound Pressure @10m	59	58	57	53	52	47	49	53	58
TCC24R24S-18	Sound Power	93	93	92	87	87	82	83	87	93
	Sound Pressure @10m	59	58	58	53	52	48	49	53	58
TCC24R20L-21	Sound Power	93	92	91	87	89	83	82	86	93
	Sound Pressure @10m	59	58	57	53	55	49	48	52	59
TCC24R22L-21	Sound Power	93	92	91	88	89	83	82	86	93
	Sound Pressure @10m	59	58	57	54	55	49	48	52	59
TCC24R24L-21	Sound Power	93	93	92	88	89	83	82	86	93
	Sound Pressure @10m	59	58	57	54	55	49	48	51	59
TCC11X04S-01	Sound Power	81	82	81	77	77	73	77	81	85
	Sound Pressure @10m	49	50	48	44	45	41	45	49	52
TCC11X06S-01	Sound Power	83	84	82	78	77	73	77	81	85
	Sound Pressure @10m	51	51	50	45	45	41	45	49	52
TCC11X08S-01	Sound Power	84	85	83	78	78	74	77	81	85
	Sound Pressure @10m	52	52	51	46	45	41	45	49	53
TCC11X06L-02	Sound Power	83	83	82	79	82	75	76	80	86
	Sound Pressure @10m	50	51	49	47	49	43	44	47	53

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 13/7°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Sound Data - TCC

TCC - AC Fans

		AC								
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	Overall [dB(A)]
TCC11X08L-03	Sound Power	84	85	83	80	82	76	76	80	86
	Sound Pressure @10m	51	52	50	47	49	43	43	47	53
TCC11X10L-03	Sound Power	85	86	84	80	82	76	76	80	86
	Sound Pressure @10m	52	53	51	47	49	43	43	47	53
TCC12X08S-04	Sound Power	84	85	84	80	80	76	80	84	88
	Sound Pressure @10m	52	52	51	47	47	43	48	52	55
TCC12X10S-04	Sound Power	85	86	84	80	80	76	80	84	88
	Sound Pressure @10m	52	53	52	47	47	43	47	51	55
TCC12X12S-04	Sound Power	86	87	85	81	80	76	80	84	88
	Sound Pressure @10m	53	53	52	47	47	43	47	51	55
TCC12X14S-04	Sound Power	87	87	86	81	80	77	80	84	88
	Sound Pressure @10m	53	54	52	48	47	43	47	51	55
TCC12X10L-05	Sound Power	85	86	84	82	85	78	79	83	89
	Sound Pressure @10m	52	53	51	49	52	45	46	50	56
TCC12X12L-06	Sound Power	86	86	85	82	85	78	79	83	89
	Sound Pressure @10m	53	53	52	49	52	45	46	50	56
TCC12X14L-06	Sound Power	87	87	85	82	85	78	79	83	89
	Sound Pressure @10m	53	54	52	49	52	45	46	49	56
TCC12X16L-06	Sound Power	87	88	86	83	85	79	79	83	89
	Sound Pressure @10m	54	54	52	49	51	45	45	49	56
TCC12X18L-06	Sound Power	88	88	86	83	85	79	79	83	89
	Sound Pressure @10m	54	55	53	49	51	45	45	49	55
TCC12X20L-06	Sound Power	88	89	87	83	85	79	79	83	89
	Sound Pressure @10m	54	55	53	49	51	45	45	49	55
TCC22X08S-14	Sound Power	84	85	84	80	80	76	80	84	88
	Sound Pressure @10m	52	52	51	47	47	43	48	52	55
TCC22X10S-14	Sound Power	85	86	84	80	80	76	80	84	88
	Sound Pressure @10m	52	53	52	47	47	43	47	51	55
TCC22X12S-14	Sound Power	86	87	85	81	80	76	80	84	88
	Sound Pressure @10m	53	53	52	47	47	43	47	51	55

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 13/7°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Air Cooled  
Technical

Sound Data - TCC

TCC - AC Fans

Technical Air Cooled

		AC								
		Single Octave Sound Levels (dB)								Overall [dB(A)]
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCC22X14S-14	Sound Power	87	87	86	81	80	77	80	84	88
	Sound Pressure @10m	53	54	52	48	47	43	47	51	55
TCC22X10L-15	Sound Power	85	86	84	82	85	78	79	83	89
	Sound Pressure @10m	52	53	51	49	52	45	46	50	56
TCC22X12L-15	Sound Power	86	86	85	82	85	78	79	83	89
	Sound Pressure @10m	53	53	52	49	52	45	46	50	56
TCC22X14L-15	Sound Power	87	87	85	82	85	78	79	83	89
	Sound Pressure @10m	53	54	52	49	52	45	46	49	56
TCC22X16L-16	Sound Power	87	88	86	83	85	79	79	83	89
	Sound Pressure @10m	54	54	52	49	51	45	45	49	56
TCC22X18L-16	Sound Power	88	88	86	83	85	79	79	83	89
	Sound Pressure @10m	54	55	53	49	51	45	45	49	55
TCC22X20L-16	Sound Power	88	89	87	83	85	79	79	83	89
	Sound Pressure @10m	54	55	53	49	51	45	45	49	55
TCC23X12S-17	Sound Power	86	87	85	81	81	78	82	86	89
	Sound Pressure @10m	53	53	52	48	48	45	49	53	56
TCC23X14S-17	Sound Power	87	87	86	82	82	78	82	86	89
	Sound Pressure @10m	53	54	53	48	48	45	49	53	56
TCC23X16S-17	Sound Power	87	88	86	82	82	78	82	86	90
	Sound Pressure @10m	54	54	53	49	48	45	48	52	56
TCC23X18S-17	Sound Power	88	88	87	82	82	78	82	86	90
	Sound Pressure @10m	54	55	53	49	48	44	48	52	56
TCC23X16L-19	Sound Power	87	88	86	84	86	80	81	84	90
	Sound Pressure @10m	54	54	52	50	53	46	47	51	57
TCC23X18L-19	Sound Power	88	88	86	84	87	80	81	84	91
	Sound Pressure @10m	54	55	53	50	53	46	47	51	57
TCC23X20L-20	Sound Power	88	89	87	84	87	80	81	84	91
	Sound Pressure @10m	54	55	53	50	53	46	47	50	57

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 13/7°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.



Sound Data - TCC

TCC - AC Fans

		AC								
		Single Octave Sound Levels (dB)								Overall [dB(A)]
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCC23X22L-20	Sound Power	89	89	87	84	87	80	81	84	91
	Sound Pressure @10m	54	55	53	50	53	46	47	50	57
TCC23X24L-20	Sound Power	89	89	88	84	87	80	81	84	91
	Sound Pressure @10m	55	55	53	50	52	46	47	50	57
TCC24X16S-18	Sound Power	87	88	87	83	83	79	83	87	91
	Sound Pressure @10m	54	54	53	49	49	46	50	54	57
TCC24X18S-18	Sound Power	88	88	87	83	83	79	83	87	91
	Sound Pressure @10m	54	55	53	49	49	45	50	54	57
TCC24X20S-18	Sound Power	88	89	87	83	83	79	83	87	91
	Sound Pressure @10m	54	55	54	49	49	45	49	53	57
TCC24X22S-18	Sound Power	89	89	88	83	83	79	83	87	91
	Sound Pressure @10m	55	55	54	49	49	45	49	53	57
TCC24X24S-18	Sound Power	89	90	88	84	83	79	83	87	91
	Sound Pressure @10m	55	55	54	49	49	45	49	53	57
TCC24X20L-21	Sound Power	88	89	87	85	88	81	82	86	92
	Sound Pressure @10m	54	55	53	51	54	47	48	52	58
TCC24X22L-21	Sound Power	89	89	87	85	88	81	82	86	92
	Sound Pressure @10m	54	55	53	51	54	47	48	52	58
TCC24X24L-21	Sound Power	89	90	88	85	88	81	82	86	92
	Sound Pressure @10m	55	55	53	51	54	47	48	51	58

Air Cooled  
Technical

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 13/7°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Sound Data

TCC - EC Fans

Technical Air Cooled

		EC								Overall [dB(A)]
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCC11R04S-01	Sound Power	88	86	85	81	82	77	78	81	87
	Sound Pressure @10m	56	54	53	49	50	45	45	49	55
TCC11R06S-01	Sound Power	84	83	83	79	79	74	77	81	86
	Sound Pressure @10m	51	50	50	46	47	42	45	49	53
TCC11R08S-01	Sound Power	85	84	81	78	78	73	77	81	85
	Sound Pressure @10m	52	51	48	45	45	41	45	49	52
TCC11R06L-02	Sound Power	92	89	87	84	85	80	77	80	89
	Sound Pressure @10m	60	57	55	51	53	48	44	47	57
TCC11R08L-03	Sound Power	91	88	87	83	85	79	77	80	89
	Sound Pressure @10m	58	56	54	51	53	46	44	47	56
TCC11R10L-03	Sound Power	88	86	86	82	84	77	76	80	88
	Sound Pressure @10m	55	54	53	49	51	44	43	47	55
TCC12R08S-04	Sound Power	91	89	88	84	85	80	81	84	90
	Sound Pressure @10m	58	56	55	51	52	47	48	52	57
TCC12R10S-04	Sound Power	88	87	86	83	83	78	80	84	89
	Sound Pressure @10m	55	54	54	50	50	45	47	51	56
TCC12R12S-04	Sound Power	87	86	86	82	82	77	80	84	89
	Sound Pressure @10m	53	53	52	49	49	44	47	51	55
TCC12R14S-04	Sound Power	85	85	85	81	82	77	80	84	88
	Sound Pressure @10m	52	51	52	48	48	43	47	51	55
TCC12R10L-05	Sound Power	94	91	90	86	88	82	80	83	92
	Sound Pressure @10m	61	58	57	53	55	50	47	50	59
TCC12R12L-06	Sound Power	93	90	89	86	88	81	80	83	91
	Sound Pressure @10m	60	57	56	53	55	48	46	50	58
TCC12R14L-06	Sound Power	92	90	89	86	88	81	80	83	91
	Sound Pressure @10m	59	57	56	52	54	48	46	49	58
TCC12R16L-06	Sound Power	91	90	89	85	87	81	79	83	91
	Sound Pressure @10m	58	56	55	52	54	47	46	49	57

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 13/7°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.  
 (4) Condenser fans running at full speed.

Sound Data

TCC - EC Fans

		EC								Overall [dB(A)]
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCC12R18L-06	Sound Power	91	90	89	85	87	81	79	83	91
	Sound Pressure @10m	58	56	55	52	54	47	46	49	57
TCC12R20L-06	Sound Power	91	89	89	85	87	80	79	83	91
	Sound Pressure @10m	57	55	55	51	53	46	45	49	57
TCC22R08S-14	Sound Power	91	89	88	84	85	80	81	84	90
	Sound Pressure @10m	58	56	55	51	52	47	48	52	57
TCC22R10S-14	Sound Power	88	87	86	83	83	78	80	84	89
	Sound Pressure @10m	55	54	54	50	50	45	47	51	56
TCC22R12S-14	Sound Power	87	86	86	82	82	77	80	84	89
	Sound Pressure @10m	53	53	52	49	49	44	47	51	55
TCC22R14S-14	Sound Power	85	85	85	81	82	77	80	84	88
	Sound Pressure @10m	52	51	52	48	48	43	47	51	55
TCC22R10L-15	Sound Power	94	91	90	86	88	82	80	83	92
	Sound Pressure @10m	61	58	57	53	55	50	47	50	59
TCC22R12L-15	Sound Power	93	90	89	86	88	81	80	83	91
	Sound Pressure @10m	60	57	56	53	55	48	46	50	58
TCC22R14L-15	Sound Power	92	90	89	86	88	81	80	83	91
	Sound Pressure @10m	59	57	56	52	54	48	46	49	58
TCC22R16L-16	Sound Power	91	90	89	85	87	81	79	83	91
	Sound Pressure @10m	58	56	55	52	54	47	46	49	57
TCC22R18L-16	Sound Power	91	90	89	85	87	81	79	83	91
	Sound Pressure @10m	58	56	55	52	54	47	46	49	57
TCC22R20L-16	Sound Power	91	89	89	85	87	80	79	83	91
	Sound Pressure @10m	57	55	55	51	53	46	45	49	57
TCC23R12S-17	Sound Power	91	89	88	84	85	80	82	86	91
	Sound Pressure @10m	57	56	55	51	52	47	49	53	58
TCC23R14S-17	Sound Power	89	88	88	84	85	79	82	86	91
	Sound Pressure @10m	56	55	54	51	51	46	49	53	57

Air Cooled  
Technical

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 13/7°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Sound Data

TCC - EC Fans

Technical Air Cooled

		EC								Overall [dB(A)]
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCC23R16S-17	Sound Power	89	88	87	84	84	79	82	86	90
	Sound Pressure @10m	55	54	54	50	51	46	49	52	57
TCC23R18S-17	Sound Power	88	87	87	83	84	79	82	86	90
	Sound Pressure @10m	54	53	53	50	50	45	48	52	56
TCC23R16L-19	Sound Power	93	91	90	87	89	82	81	84	92
	Sound Pressure @10m	60	57	56	53	55	49	48	51	59
TCC23R18L-19	Sound Power	92	91	90	86	89	82	81	84	92
	Sound Pressure @10m	59	57	56	53	55	48	47	51	59
TCC23R20L-20	Sound Power	92	90	89	86	89	82	81	84	92
	Sound Pressure @10m	58	56	55	52	55	48	47	51	58
TCC23R22L-20	Sound Power	91	90	89	86	88	82	81	84	92
	Sound Pressure @10m	57	56	55	52	54	47	47	50	58
TCC23R24L-20	Sound Power	91	90	89	86	88	81	81	84	92
	Sound Pressure @10m	57	56	55	52	54	47	47	50	58
TCC24R16S-18	Sound Power	91	90	89	85	86	81	83	87	92
	Sound Pressure @10m	58	56	56	52	53	47	50	54	58
TCC24R18S-18	Sound Power	90	89	89	85	86	81	83	87	92
	Sound Pressure @10m	57	55	55	51	52	47	50	54	58
TCC24R20S-18	Sound Power	89	88	88	85	85	80	83	87	92
	Sound Pressure @10m	56	55	54	51	51	46	49	53	58
TCC24R22S-18	Sound Power	89	88	88	84	85	80	83	87	91
	Sound Pressure @10m	55	54	54	50	51	46	49	53	57
TCC24R24S-18	Sound Power	88	88	88	84	85	80	83	87	91
	Sound Pressure @10m	54	54	54	50	51	46	49	53	57
TCC24R20L-21	Sound Power	94	92	91	88	90	84	82	86	94
	Sound Pressure @10m	60	58	57	54	56	50	48	52	60
TCC24R22L-21	Sound Power	94	92	91	88	90	83	82	86	93
	Sound Pressure @10m	59	58	57	54	56	49	48	52	59
TCC24R24L-21	Sound Power	93	91	90	87	90	83	82	86	93
	Sound Pressure @10m	59	57	56	53	55	49	48	51	59

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 13/7°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.  
 (4) Condenser fans running at full speed.

Sound Data

TCC - EC Fans

		EC								Overall [dB(A)]
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCC11X04S-01	Sound Power	83	82	79	77	77	73	77	81	85
	Sound Pressure @10m	50	49	47	45	45	41	45	49	52
TCC11X06S-01	Sound Power	84	83	81	78	78	73	77	81	85
	Sound Pressure @10m	52	51	48	45	45	41	45	49	53
TCC11X08S-01	Sound Power	82	81	79	77	77	73	77	81	85
	Sound Pressure @10m	49	49	46	44	44	40	45	49	52
TCC11X06L-02	Sound Power	84	83	80	79	82	75	76	80	86
	Sound Pressure @10m	52	51	48	47	50	43	44	47	53
TCC11X08L-03	Sound Power	86	85	81	80	82	75	76	80	86
	Sound Pressure @10m	53	52	49	47	50	43	43	47	53
TCC11X10L-03	Sound Power	86	86	82	80	82	76	76	80	86
	Sound Pressure @10m	54	53	49	47	50	43	43	47	53
TCC12X08S-04	Sound Power	86	85	82	80	80	76	80	84	88
	Sound Pressure @10m	53	52	50	47	48	43	48	52	55
TCC12X10S-04	Sound Power	87	86	83	80	81	76	80	84	88
	Sound Pressure @10m	54	53	50	47	48	43	47	51	55
TCC12X12S-04	Sound Power	87	86	84	81	81	76	80	84	88
	Sound Pressure @10m	54	53	51	48	48	43	47	51	55
TCC12X14S-04	Sound Power	88	87	84	81	81	76	80	84	88
	Sound Pressure @10m	55	54	51	48	48	43	47	51	55
TCC12X10L-05	Sound Power	86	86	82	82	85	78	79	83	89
	Sound Pressure @10m	54	53	49	49	52	45	46	50	56
TCC12X12L-06	Sound Power	87	86	83	82	85	78	79	83	89
	Sound Pressure @10m	54	53	50	49	52	45	46	50	56
TCC12X14L-06	Sound Power	88	87	84	82	85	78	79	83	89
	Sound Pressure @10m	55	54	50	49	52	45	46	49	56
TCC12X16L-06	Sound Power	89	88	84	83	85	78	79	83	89
	Sound Pressure @10m	55	54	51	49	52	45	45	49	56
TCC12X18L-06	Sound Power	89	88	85	83	85	78	79	83	89
	Sound Pressure @10m	55	54	51	49	52	45	45	49	55
TCC12X20L-06	Sound Power	89	89	85	83	85	79	79	83	89
	Sound Pressure @10m	56	55	51	49	52	45	45	49	55

Air Cooled  
Technical

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 13/7°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Sound Data

TCC - EC Fans

Technical Air Cooled

		EC								Overall [dB(A)]
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCC22X08S-14	Sound Power	86	85	82	80	80	76	80	84	88
	Sound Pressure @10m	53	52	50	47	48	43	48	52	55
TCC22X10S-14	Sound Power	87	86	83	80	81	76	80	84	88
	Sound Pressure @10m	54	53	50	47	48	43	47	51	55
TCC22X12S-14	Sound Power	87	86	84	81	81	76	80	84	88
	Sound Pressure @10m	54	53	51	48	48	43	47	51	55
TCC22X14S-14	Sound Power	88	87	84	81	81	76	80	84	88
	Sound Pressure @10m	55	54	51	48	48	43	47	51	55
TCC22X10L-15	Sound Power	86	86	82	82	85	78	79	83	89
	Sound Pressure @10m	54	53	49	49	52	45	46	50	56
TCC22X12L-15	Sound Power	87	86	83	82	85	78	79	83	89
	Sound Pressure @10m	54	53	50	49	52	45	46	50	56
TCC22X14L-15	Sound Power	88	87	84	82	85	78	79	83	89
	Sound Pressure @10m	55	54	50	49	52	45	46	49	56
TCC22X16L-16	Sound Power	89	88	84	83	85	78	79	83	89
	Sound Pressure @10m	55	54	51	49	52	45	45	49	56
TCC22X18L-16	Sound Power	89	88	85	83	85	78	79	83	89
	Sound Pressure @10m	55	54	51	49	52	45	45	49	55
TCC22X20L-16	Sound Power	89	89	85	83	85	79	79	83	89
	Sound Pressure @10m	56	55	51	49	52	45	45	49	55
TCC23X12S-17	Sound Power	87	86	84	82	82	78	82	86	89
	Sound Pressure @10m	54	53	51	48	49	45	49	53	56
TCC23X14S-17	Sound Power	88	87	84	82	82	78	82	86	89
	Sound Pressure @10m	55	54	51	49	49	44	49	53	56
TCC23X16S-17	Sound Power	89	88	85	82	82	78	82	86	90
	Sound Pressure @10m	55	54	51	49	49	44	48	52	56
TCC23X18S-17	Sound Power	89	88	85	83	83	78	82	86	90
	Sound Pressure @10m	55	54	52	49	49	44	48	52	56

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 13/7°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.  
 (4) Condenser fans running at full speed.

Sound Data

TCC - EC Fans

		EC								Overall [dB(A)]
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCC23X16L-19	Sound Power	89	88	84	84	87	80	81	84	90
	Sound Pressure @10m	55	54	51	50	53	46	47	51	57
TCC23X18L-19	Sound Power	89	88	85	84	87	80	81	84	91
	Sound Pressure @10m	55	54	51	50	53	46	47	51	57
TCC23X20L-20	Sound Power	89	89	85	84	87	80	81	84	91
	Sound Pressure @10m	56	55	51	50	53	46	47	50	57
TCC23X22L-20	Sound Power	90	89	86	84	87	80	81	84	91
	Sound Pressure @10m	56	55	52	50	53	46	47	50	57
TCC23X24L-20	Sound Power	90	89	86	85	87	80	81	84	91
	Sound Pressure @10m	56	55	52	50	53	46	47	50	57
TCC24X16S-18	Sound Power	89	88	85	83	83	79	83	87	91
	Sound Pressure @10m	55	54	52	49	50	45	50	54	57
TCC24X18S-18	Sound Power	89	88	86	83	83	79	83	87	91
	Sound Pressure @10m	55	54	52	49	50	45	50	54	57
TCC24X20S-18	Sound Power	90	89	86	83	84	79	83	87	91
	Sound Pressure @10m	56	55	52	49	50	45	49	53	57
TCC24X22S-18	Sound Power	90	89	86	84	84	79	83	87	91
	Sound Pressure @10m	56	55	52	50	50	45	49	53	57
TCC24X24S-18	Sound Power	90	89	87	84	84	79	83	87	91
	Sound Pressure @10m	56	55	52	50	50	45	49	53	57
TCC24X20L-21	Sound Power	89	89	85	85	88	81	82	86	92
	Sound Pressure @10m	56	55	51	51	54	47	48	52	58
TCC24X22L-21	Sound Power	90	89	86	85	88	81	82	86	92
	Sound Pressure @10m	56	55	52	51	54	47	48	52	58
TCC24X24L-21	Sound Power	90	89	86	85	88	81	82	86	92
	Sound Pressure @10m	56	55	52	51	54	47	48	51	58

Air Cooled  
Technical

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 13/7°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Sound Data

TCC - High Airflow EC Fans

Technical Air Cooled

		HAEC								Overall [dB(A)]
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCC11R04S-01	Sound Power	96	94	91	84	82	79	78	81	89
	Sound Pressure @10m	64	62	59	52	50	47	46	49	57
TCC11R06S-01	Sound Power	92	90	88	81	80	76	78	81	87
	Sound Pressure @10m	60	58	56	49	48	43	45	49	55
TCC11R08S-01	Sound Power	92	89	86	80	79	74	77	81	86
	Sound Pressure @10m	59	56	53	47	46	42	45	49	53
TCC11R06L-02	Sound Power	99	98	94	88	87	84	79	80	93
	Sound Pressure @10m	67	66	62	55	54	52	46	47	60
TCC11R08L-03	Sound Power	98	96	93	86	86	81	78	80	91
	Sound Pressure @10m	65	63	61	54	53	48	45	47	58
TCC11R10L-03	Sound Power	96	94	92	85	85	79	77	80	90
	Sound Pressure @10m	64	61	59	52	52	46	44	47	57
TCC12R08S-04	Sound Power	98	96	94	87	85	82	81	84	92
	Sound Pressure @10m	66	64	61	54	53	49	48	52	59
TCC12R10S-04	Sound Power	97	94	92	85	84	80	81	84	91
	Sound Pressure @10m	64	62	60	52	51	47	48	51	58
TCC12R12S-04	Sound Power	95	93	91	84	83	79	81	84	90
	Sound Pressure @10m	62	60	58	51	50	46	47	51	57
TCC12R14S-04	Sound Power	94	92	90	83	83	78	80	84	90
	Sound Pressure @10m	61	58	57	50	49	45	47	51	56
TCC12R10L-05	Sound Power	100	99	95	89	88	85	81	83	94
	Sound Pressure @10m	68	66	63	56	56	52	48	50	61
TCC12R12L-06	Sound Power	100	98	95	89	88	83	81	83	93
	Sound Pressure @10m	67	65	62	55	55	50	47	50	60
TCC12R14L-06	Sound Power	100	98	96	89	88	83	81	83	93
	Sound Pressure @10m	67	65	62	55	55	50	47	49	60
TCC12R16L-06	Sound Power	100	97	95	88	88	82	80	83	93
	Sound Pressure @10m	66	64	62	54	54	49	47	49	59
TCC12R18L-06	Sound Power	100	97	95	88	88	82	80	83	93
	Sound Pressure @10m	66	64	62	54	54	49	47	49	59
TCC12R20L-06	Sound Power	99	97	95	88	88	82	80	83	93
	Sound Pressure @10m	65	63	61	54	54	48	46	49	59
TCC22R08S-14	Sound Power	98	96	94	87	85	82	81	84	92
	Sound Pressure @10m	66	64	61	54	53	49	48	52	59

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 13/7°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.



Sound Data

TCC - High Airflow EC Fans

		HAEC								Overall [dB(A)]
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCC22R10S-14	Sound Power	97	94	92	85	84	80	81	84	91
	Sound Pressure @10m	64	62	60	52	51	47	48	51	58
TCC22R12S-14	Sound Power	95	93	91	84	83	79	81	84	90
	Sound Pressure @10m	62	60	58	51	50	46	47	51	57
TCC22R14S-14	Sound Power	94	92	90	83	83	78	80	84	90
	Sound Pressure @10m	61	58	57	50	49	45	47	51	56
TCC22R10L-15	Sound Power	100	99	95	89	88	85	81	83	94
	Sound Pressure @10m	68	66	63	56	56	52	48	50	61
TCC22R12L-15	Sound Power	100	98	95	89	88	83	81	83	93
	Sound Pressure @10m	67	65	62	55	55	50	47	50	60
TCC22R14L-15	Sound Power	100	98	96	89	88	83	81	83	93
	Sound Pressure @10m	67	65	62	55	55	50	47	49	60
TCC22R16L-16	Sound Power	100	97	95	88	88	82	80	83	93
	Sound Pressure @10m	66	64	62	54	54	49	47	49	59
TCC22R18L-16	Sound Power	100	97	95	88	88	82	80	83	93
	Sound Pressure @10m	66	64	62	54	54	49	47	49	59
TCC22R20L-16	Sound Power	99	97	95	88	88	82	80	83	93
	Sound Pressure @10m	65	63	61	54	54	48	46	49	59
TCC23R12S-17	Sound Power	99	97	94	87	86	82	83	86	93
	Sound Pressure @10m	66	63	61	54	53	49	49	53	60
TCC23R14S-17	Sound Power	98	96	94	86	85	81	82	86	92
	Sound Pressure @10m	65	62	60	53	52	48	49	53	59
TCC23R16S-17	Sound Power	97	95	93	86	85	81	82	86	92
	Sound Pressure @10m	64	61	60	52	51	47	49	52	58
TCC23R18S-17	Sound Power	97	94	93	85	85	80	82	86	92
	Sound Pressure @10m	63	61	59	52	51	46	49	52	58
TCC23R16L-19	Sound Power	101	99	96	89	89	84	82	84	94
	Sound Pressure @10m	67	65	63	56	56	51	48	51	61
TCC23R18L-19	Sound Power	101	98	96	89	89	84	82	84	94
	Sound Pressure @10m	67	65	62	55	55	50	48	51	60
TCC23R20L-20	Sound Power	100	98	96	89	89	83	82	84	94
	Sound Pressure @10m	66	64	62	55	55	49	48	51	60
TCC23R22L-20	Sound Power	100	98	96	88	89	83	82	84	94
	Sound Pressure @10m	66	63	61	54	55	49	47	50	60

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 13/7°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Air Cooled  
Technical

Sound Data

TCC - High Airflow EC Fans

Technical Air Cooled

		HAEC								Overall [dB(A)]
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCC23R24L-20	Sound Power	100	97	95	88	89	83	82	84	94
	Sound Pressure @10m	65	63	61	54	55	49	47	50	59
TCC24R16S-18	Sound Power	100	97	95	88	87	83	84	87	94
	Sound Pressure @10m	66	64	62	54	53	49	50	54	60
TCC24R18S-18	Sound Power	99	97	95	87	86	82	84	87	93
	Sound Pressure @10m	65	63	61	54	53	48	50	54	60
TCC24R20S-18	Sound Power	98	96	94	87	86	82	84	87	93
	Sound Pressure @10m	64	62	60	53	52	48	50	53	59
TCC24R22S-18	Sound Power	98	95	94	86	86	81	83	87	93
	Sound Pressure @10m	64	61	60	52	52	47	49	53	59
TCC24R24S-18	Sound Power	97	95	94	86	86	81	83	87	93
	Sound Pressure @10m	63	61	59	52	51	47	49	53	58
TCC24R20L-21	Sound Power	102	100	97	90	90	85	83	86	96
	Sound Pressure @10m	68	66	63	56	57	51	49	52	62
TCC24R22L-21	Sound Power	102	99	97	90	90	85	83	86	95
	Sound Pressure @10m	68	65	63	56	56	51	49	52	61
TCC24R24L-21	Sound Power	101	99	97	90	90	85	83	86	95
	Sound Pressure @10m	67	65	63	56	56	50	49	51	61

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 13/7°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Intentionally blank

**Technical Data - TCF (R) TCF11R06S-07, TCF11R08S-07, TCF11R06L-11**

**Mechanical**

Technical FreeCool

			87	88	89
Mechanical Data	Notes	Units	TCF11R06S-07	TCF11R08S-07	TCF11R06L-11
Cooling Duty - AC Fans	(1)	kW	290	300	390
Nom Input -Cooling Only		kW	81	81	123
EER	(2)		3.58	3.69	3.17
ESEER	(3)		4.64	4.73	4.33
SEER	(3)		4.51	4.59	4.19
Nominal Output - Free Cooling	(4)	kW	266	322	291
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	0.7	3.0	-2.8
Cooling Duty - EC Fans	(1)	kW	290	300	390
Nom Input -Cooling Only		kW	80	78	119
EER	(2)		3.64	3.86	3.26
ESEER	(3)		5.40	5.75	4.77
SEER	(3)		5.19	5.51	4.59
Nominal Output - Free Cooling	(4)	kW	280	336	309
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	1.5	3.3	-1.7
Cooling Duty - High Airflow EC Fans	(1)	kW	290	300	390
Nom Input -Cooling Only		kW	78.8	77.1	117.6
EER	(2)		3.7	3.9	3.3
ESEER	(3)		5.4	5.8	4.8
SEER	(3)		5.23	5.55	4.63
Nominal Output - Free Cooling	(4)	kW	292.9	347.2	325.5
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	1.9	3.6	-0.8
Capacity Steps	(6)	%	30-100%	30-100%	30-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 3758	2800 x 2200 x 4890	2800 x 2200 x 3758
Machine Weight	(7)	kg	4075	4885	4505
Operating Weight	(7)	kg	4535	5445	5055
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	25.0	25.0	30.5
Total Min. Water Flow		l/s	8.3	8.3	10.0
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	14.2	18.9	14.2
Maximum Airflow - AC Fans		m <sup>3</sup> /s	30.6	40.8	30.6
Maximum Airflow - EC Fans		m <sup>3</sup> /s	34.4	45.9	34.4
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	38.4	51.1	38.4
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			6	8	6
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	905	905	905
Maximum Speed - EC Fans		rpm	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			1	1	1
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged				R134a	
Charge (Total) CCT1 + CCT2		kg	135	150	195
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN100	DN100	DN125
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	424	514	513
Minimum System Water Volume	(8)	l	1784	1920	2342
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	12.2	12.6	16.4
Pressure Drop		kPa	94.6	91.7	106.8

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

## Technical Data

## TCF11R06S-07, TCF11R08S-07, TCF11R06L-11

## Electrical

			87	88	89
ELECTRICAL DATA			TCF11R06S-07	TCF11R08S-07	TCF11R06L-11
<b>Unit Data</b>					
Full Load Amps	(1)	A	160.8	169.4	235.8
Maximum Start Amps		A	2	2	2
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	200	200	250
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>					
Available (fitted by others)		W	500	500	500
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			6	8	6
Full Load Amps		A	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15
Motor Rating		kW	1.8	1.8	1.8
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			6	8	6
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			6	8	6
Full Load Amps		A	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	3.10	3.10	3.10
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	135	135	210
Quantity			1	1	1
Motor Rating		kW	87	87	129
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Technical Data

TCF11R08L-08, TCF11R10L-10, TCF12R08S-09

Mechanical

Technical FreeCool

			90	91	92
Mechanical Data	Notes	Units	TCF11R08L-08	TCF11R10L-10	TCF12R08S-09
Cooling Duty - AC Fans	(1)	kW	425	450	470
Nom Input -Cooling Only		kW	128	127	142
EER	(2)		3.33	3.55	3.31
ESEER	(3)		4.40	4.58	4.55
SEER	(3)		4.27	4.45	4.41
Nominal Output - Free Cooling	(4)	kW	366	432	377
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-0.3	1.4	-1.4
Cooling Duty - EC Fans	(1)	kW	425	450	470
Nom Input -Cooling Only		kW	126	124	140
EER	(2)		3.37	3.61	3.36
ESEER	(3)		5.08	5.36	5.17
SEER	(3)		4.87	5.14	4.96
Nominal Output - Free Cooling	(4)	kW	386	453	399
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	0.6	2.0	-0.5
Cooling Duty - High Airflow EC Fans	(1)	kW	425	450	470
Nom Input -Cooling Only		kW	124.4	123.2	137.9
EER	(2)		3.4	3.7	3.4
ESEER	(3)		5.1	5.4	5.2
SEER	(3)		4.91	5.18	5.00
Nominal Output - Free Cooling	(4)	kW	405.2	473.7	420.1
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	1.2	2.4	0.2
Capacity Steps	(6)	%	30-100%	30-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 4890	2800 x 2200 x 6022	2800 x 2200 x 4890
Machine Weight	(7)	kg	5130	6190	5510
Operating Weight	(7)	kg	5760	6915	5950
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	43.6	37.5	50.0
Total Min. Water Flow		l/s	14.4	12.5	16.7
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	18.9	23.7	18.9
Maximum Airflow - AC Fans		m <sup>3</sup> /s	40.8	51.0	40.8
Maximum Airflow - EC Fans		m <sup>3</sup> /s	45.9	57.4	45.9
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	51.1	63.9	51.1
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			8	10	8
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	905	905	905
Maximum Speed - EC Fans		rpm	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			1	1	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged			R134a		
Charge (Total) CCT1 + CCT2		kg	195	305	195
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN125	DN125	DN125
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	586	673	401
Minimum System Water Volume	(8)	l	2579	2783	1503
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	17.9	18.9	19.8
Pressure Drop		kPa	75.4	89.7	85.4

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

## Technical Data

## TCF11R08L-08, TCF11R10L-10, TCF12R08S-09

## Electrical

			90	91	92
ELECTRICAL DATA			TCF11R08L-08	TCF11R10L-10	TCF12R08S-09
<b>Unit Data</b>					
Full Load Amps	(1)	A	244.4	253	304.4
Maximum Start Amps		A	2	2	169.4
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	315	315	315
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25		25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>					
Available (fitted by others)		W	500	500	500
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			8	10	8
Full Load Amps		A	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15
Motor Rating		kW	1.8	1.8	1.8
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			8	10	8
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			8	10	8
Full Load Amps		A	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	3.10	3.10	3.10
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	210	210	135
Quantity			1	1	2
Motor Rating		kW	129	129	87
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Technical Data

TCF12R10S-05, TCF12R12S-05, TCF12R14S-05

Mechanical

Technical FreeCool

			93	94	95
Mechanical Data	Notes	Units	TCF12R10S-05	TCF12R12S-05	TCF12R14S-05
Cooling Duty - AC Fans	(1)	kW	500	530	560
Nom Input -Cooling Only		kW	139	144	151
EER	(2)		3.60	3.69	3.72
ESEER	(3)		4.69	4.72	4.73
SEER	(3)		4.56	4.59	4.61
Nominal Output - Free Cooling	(4)	kW	448	515	578
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	0.4	1.6	2.4
Cooling Duty - EC Fans	(1)	kW	500	530	560
Nom Input -Cooling Only		kW	137	140	145
EER	(2)		3.65	3.78	3.86
ESEER	(3)		5.48	5.60	5.70
SEER	(3)		5.26	5.38	5.47
Nominal Output - Free Cooling	(4)	kW	472	540	604
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	1.2	2.2	2.9
Cooling Duty - High Airflow EC Fans	(1)	kW	500	530	560
Nom Input -Cooling Only		kW	135.3	139.0	143.9
EER	(2)		3.7	3.8	3.9
ESEER	(3)		5.5	5.6	5.7
SEER	(3)		5.30	5.41	5.50
Nominal Output - Free Cooling	(4)	kW	494.8	563.9	629.4
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	1.6	2.6	3.2
Capacity Steps	(6)	%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 6022	2800 x 2200 x 7154	2800 x 2200 x 8286
Machine Weight	(7)	kg	6585	7465	8325
Operating Weight	(7)	kg	7335	8335	9335
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	50.0	50.0	50.0
Total Min. Water Flow		l/s	16.7	16.7	16.7
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	23.7	28.4	33.2
Maximum Airflow - AC Fans		m <sup>3</sup> /s	51.0	61.2	71.3
Maximum Airflow - EC Fans		m <sup>3</sup> /s	57.4	68.9	80.4
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	63.9	76.7	89.5
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			10	12	14
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	905	905	905
Maximum Speed - EC Fans		rpm	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged				R134a	
Charge (Total) CCT1 + CCT2		kg	275	295	310
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN125	DN125	DN125
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	700	819	943
Minimum System Water Volume	(8)	l	1872	2062	2256
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	21.0	22.3	23.6
Pressure Drop		kPa	92.3	95.6	101.5

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale



Technical Data

TCF12R10S-05, TCF12R12S-05, TCF12R14S-05

Electrical

			93	94	95
ELECTRICAL DATA			TCF12R10S-05	TCF12R12S-05	TCF12R14S-05
<b>Unit Data</b>					
Full Load Amps	(1)	A	313	321.6	330.2
Maximum Start Amps		A	178	186.6	195.2
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	355	355	355
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25		25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>					
Available (fitted by others)		W	500	500	500
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			10	12	14
Full Load Amps		A	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15
Motor Rating		kW	1.8	1.8	1.8
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			10	12	14
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			10	12	14
Full Load Amps		A	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	3.10	3.10	3.10
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	135	135	135
Quantity			2	2	2
Motor Rating		kW	87	87	87
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCF12R12L-12, TCF12R14L-12, TCF12R16L-12

Mechanical

Technical FreeCool

			96	97	98
Mechanical Data	Notes	Units	TCF12R12L-12	TCF12R14L-12	TCF12R16L-12
Cooling Duty - AC Fans	(1)	kW	670	750	800
Nom Input -Cooling Only		kW	198	216	227
EER	(2)		3.38	3.47	3.53
ESEER	(3)		4.55	4.63	4.65
SEER	(3)		4.41	4.48	4.51
Nominal Output - Free Cooling	(4)	kW	558	642	717
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-0.8	-0.3	0.4
Cooling Duty - EC Fans	(1)	kW	670	750	800
Nom Input -Cooling Only		kW	195	213	223
EER	(2)		3.44	3.52	3.58
ESEER	(3)		5.20	5.34	5.42
SEER	(3)		4.98	5.11	5.20
Nominal Output - Free Cooling	(4)	kW	589	678	756
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	0.1	0.5	1.2
Cooling Duty - High Airflow EC Fans	(1)	kW	670	750	800
Nom Input -Cooling Only		kW	192.4	210.4	220.8
EER	(2)		3.5	3.6	3.6
ESEER	(3)		5.2	5.4	5.5
SEER	(3)		5.02	5.15	5.23
Nominal Output - Free Cooling	(4)	kW	619.1	711.4	791.7
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	0.7	1.1	1.6
Capacity Steps	(6)	%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 7154	2800 x 2200 x 8286	2800 x 2200 x 9418
Machine Weight	(7)	kg	8215	9075	9960
Operating Weight	(7)	kg	9285	10295	11295
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	70.3	70.3	70.3
Total Min. Water Flow		l/s	23.3	23.3	23.3
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	28.4	33.2	37.9
Maximum Airflow - AC Fans		m <sup>3</sup> /s	61.2	71.3	81.5
Maximum Airflow - EC Fans		m <sup>3</sup> /s	68.9	80.4	91.8
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	76.7	89.5	102.3
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			12	14	16
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	905	905	905
Maximum Speed - EC Fans		rpm	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged				R134a	
Charge (Total) CCT1 + CCT2		kg	405	420	440
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN150	DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	991	1144	1251
Minimum System Water Volume	(8)	l	2562	2903	3127
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	28.2	31.5	33.6
Pressure Drop		kPa	86.4	97.7	103.8

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCF12R12L-12, TCF12R14L-12, TCF12R16L-12

Electrical

			96	97	98
ELECTRICAL DATA			TCF12R12L-12	TCF12R14L-12	TCF12R16L-12
<b>Unit Data</b>					
Full Load Amps	(1)	A	471.6	480.2	488.8
Maximum Start Amps		A	261.6	270.2	278.8
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	500	500	500
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>					
Available (fitted by others)		W	500	500	500
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			12	14	16
Full Load Amps		A	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15
Motor Rating		kW	1.8	1.8	1.8
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			12	14	16
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			12	14	16
Full Load Amps		A	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	3.10	3.10	3.10
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	210	210	210
Quantity			2	2	2
Motor Rating		kW	129	129	129
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

FreeCool  
Technical

Technical Data

TCF12R18L-13, TCF12R20L-13

Mechanical

Technical FreeCool

			99	100
Mechanical Data	Notes	Units	TCF12R18L-13	TCF12R20L-13
Cooling Duty - AC Fans	(1)	kW	850	900
Nom Input -Cooling Only		kW	243	258
EER	(2)		3.50	3.49
ESEER	(3)		4.64	4.62
SEER	(3)		4.50	4.48
Nominal Output - Free Cooling	(4)	kW	791	864
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	1.0	1.4
Cooling Duty - EC Fans	(1)	kW	850	900
Nom Input -Cooling Only		kW	239	253
EER	(2)		3.56	3.56
ESEER	(3)		5.46	5.46
SEER	(3)		5.22	5.23
Nominal Output - Free Cooling	(4)	kW	832	907
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	1.7	2.0
Cooling Duty - High Airflow EC Fans	(1)	kW	850	900
Nom Input -Cooling Only		kW	236.2	250.5
EER	(2)		3.6	3.6
ESEER	(3)		5.5	5.5
SEER	(3)		5.26	5.26
Nominal Output - Free Cooling	(4)	kW	870.3	947.5
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	2.1	2.4
Capacity Steps	(6)	%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 10550	2800 x 2200 x 11682
Machine Weight	(7)	kg	10745	11630
Operating Weight	(7)	kg	12210	13210
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)	
Evaporator - Type			Flooded - Shell and Tube Evaporator	
Insulation			Class O, UV stable Insulation	
Total Max. Water Flow		l/s	74.2	74.2
Total Min. Water Flow		l/s	24.7	24.7
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins	
Face Area Total		m <sup>2</sup>	42.6	47.4
Maximum Airflow - AC Fans		m <sup>3</sup> /s	91.7	101.9
Maximum Airflow - EC Fans		m <sup>3</sup> /s	103.3	114.8
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	115.1	127.9
Condenser Fan & Motor			Sickle Bladed Axial Fan	
Quantity			18	20
Diameter		mm	800	800
Maximum Speed - AC Fans		rpm	905	905
Maximum Speed - EC Fans		rpm	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor	
Quantity			2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation	
Refrigeration			Single Circuit	Single Circuit
Refrigerant Pre-charged			R134a	
Charge (Total) CCT1 + CCT2		kg	430	445
Refrigeration Control			Electronic Expansion Valve (EEV)	
Water System			Grooved Type Coupling and Pipe Assembly	
Water Inlet / Outlet			DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2
Water Volume		l	1365	1478
Minimum System Water Volume	(8)	l	3358	3589
Max System Operating Pressure		Barg	10	10
Flow Rate		l/s	35.7	37.8
Pressure Drop		kPa	108.3	116.8

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCF12R18L-13, TCF12R20L-13

Electrical

			99	100
ELECTRICAL DATA			TCF12R18L-13	TCF12R20L-13
<b>Unit Data</b>				
Full Load Amps	(1)	A	497.4	506
Maximum Start Amps		A	287.4	296
Mains Supply		VAC	400V (±10%) 3PH 50Hz	
Recommended Mains Fuse Size		A	560	560
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)	
Independent Permanent Supply Recommended Fuse Size		A	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)	
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG	
Control Circuit		VAC	24 VAC & 230VAC (±10%)	
<b>Evaporator</b>				
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>				
Available (fitted by others)		W	500	500
<b>Condenser Fan - Per Fan (AC)</b>				
Quantity			18	20
Full Load Amps		A	4.3	4.3
Locked Rotor Amps		A	15	15
Motor Rating		kW	1.8	1.8
<b>Condenser Fan - Per Fan (EC)</b>				
Quantity			18	20
Full Load Amps		A	3.9	3.9
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>				
Quantity			18	20
Full Load Amps		A	4.8	4.8
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	3.10	3.10
<b>Compressor - Per Compressor</b>				
Nominal Run Amps		A	210	210
Quantity			2	2
Motor Rating		kW	129	129
Start Amps		A	2	2
Type Of Start			Electronic Soft Start	

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCF22R10S-22, TCF22R12S-22, TCF22R14S-22

Mechanical

Technical FreeCool

			101	102	103
Mechanical Data	Notes	Units	TCF22R10S-22	TCF22R12S-22	TCF22R14S-22
Cooling Duty - AC Fans	(1)	kW	500	530	560
Nom Input -Cooling Only		kW	139	144	151
EER	(2)		3.59	3.68	3.71
ESEER	(3)		4.52	4.60	4.65
SEER	(3)		4.41	4.49	4.53
Nominal Output - Free Cooling	(4)	kW	448	515	578
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	0.4	1.6	2.4
Cooling Duty - EC Fans	(1)	kW	500	530	560
Nom Input -Cooling Only		kW	137	141	145
EER	(2)		3.65	3.77	3.85
ESEER	(3)		4.95	5.29	5.43
SEER	(3)		4.80	5.11	5.24
Nominal Output - Free Cooling	(4)	kW	472	540	604
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	1.2	2.2	2.9
Cooling Duty - High Airflow EC Fans	(1)	kW	500	530	560
Nom Input -Cooling Only		kW	135.6	139.2	144.2
EER	(2)		3.7	3.8	3.9
ESEER	(3)		5.0	5.3	5.5
SEER	(3)		4.86	5.14	5.27
Nominal Output - Free Cooling	(4)	kW	494.8	563.9	629.4
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	1.6	2.6	3.2
Capacity Steps	(6)	%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 6022	2800 x 2200 x 7154	2800 x 2200 x 8286
Machine Weight	(7)	kg	6690	7570	8490
Operating Weight	(7)	kg	7420	8400	9460
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	49.9	49.9	49.9
Total Min. Water Flow		l/s	16.7	16.7	16.7
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m²	23.7	28.4	33.2
Maximum Airflow - AC Fans		m³/s	51.0	61.2	71.3
Maximum Airflow - EC Fans		m³/s	57.4	68.9	80.4
Maximum Airflow - High Airflow EC Fans		m³/s	63.9	76.7	89.5
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			10	12	14
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	905	905	905
Maximum Speed - EC Fans		rpm	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a		
Charge (Total) CCT1 + CCT2		kg	150 + 145	160 + 155	165 + 160
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN125	DN125	DN125
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	735	830	975
Minimum System Water Volume	(8)	l	1907	2073	2288
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	21.0	22.3	23.6
Pressure Drop		kPa	90.6	94.3	100.3

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCF22R10S-22, TCF22R12S-22, TCF22R14S-22

Electrical

			101	102	103
ELECTRICAL DATA			TCF22R10S-22	TCF22R12S-22	TCF22R14S-22
<b>Unit Data</b>					
Full Load Amps	(1)	A	313	322	330
Maximum Start Amps		A	178	187	195
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	355	355	355
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25		25
Independent Permanent Supply			230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>					
Available (fitted by others)		W	500	500	500
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			10	12	14
Full Load Amps		A	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15
Motor Rating		kW	1.8	1.8	1.8
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			10	12	14
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			10	12	14
Full Load Amps		A	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	3.10	3.10	3.1
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	135	135	135
Quantity			2	2	2
Motor Rating		kW	87	87	87
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCF22R12L-23, TCF22R14L-23, TCF22R16L-23

Mechanical

Technical FreeCool

			104	105	106
Mechanical Data	Notes	Units	TCF22R12L-23	TCF22R14L-23	TCF22R16L-23
Cooling Duty - AC Fans	(1)	kW	670	750	800
Nom Input -Cooling Only		kW	196	215	226
EER	(2)		3.42	3.48	3.54
ESEER	(3)		4.32	4.42	4.47
SEER	(3)		4.21	4.30	4.36
Nominal Output - Free Cooling	(4)	kW	558	642	717
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-0.8	-0.3	0.4
Cooling Duty - EC Fans	(1)	kW	670	750	800
Nom Input -Cooling Only		kW	193	212	223
EER	(2)		3.48	3.53	3.59
ESEER	(3)		4.63	4.82	4.99
SEER	(3)		4.49	4.66	4.82
Nominal Output - Free Cooling	(4)	kW	589	678	756
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	0.1	0.5	1.2
Cooling Duty - High Airflow EC Fans	(1)	kW	670	750	800
Nom Input -Cooling Only		kW	190.3	209.7	220.3
EER	(2)		3.5	3.6	3.6
ESEER	(3)		4.7	4.9	5.0
SEER	(3)		4.53	4.71	4.87
Nominal Output - Free Cooling	(4)	kW	619.1	711.4	791.7
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	0.7	1.1	1.6
Capacity Steps	(6)	%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 7154	2800 x 2200 x 8286	2800 x 2200 x 9418
Machine Weight	(7)	kg	8480	9440	10270
Operating Weight	(7)	kg	9500	10640	11550
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	77.9	77.9	77.9
Total Min. Water Flow		l/s	25.8	25.8	25.8
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	28.4	33.2	37.9
Maximum Airflow - AC Fans		m <sup>3</sup> /s	61.2	71.3	81.5
Maximum Airflow - EC Fans		m <sup>3</sup> /s	68.9	80.4	91.8
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	76.7	89.5	102.3
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			12	14	16
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	905	905	905
Maximum Speed - EC Fans		rpm	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged				R134a	
Charge (Total) CCT1 + CCT2		kg	220 + 215	225 + 220	235 + 225
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN150	DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	1027	1204	1282
Minimum System Water Volume	(8)	l	2598	2962	3158
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	28.2	31.5	33.6
Pressure Drop		kPa	82.2	92.8	98.1

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale



## Technical Data

## TCF22R12L-23, TCF22R14L-23, TCF22R16L-23

## Electrical

			104	105	106
ELECTRICAL DATA			TCF22R12L-23	TCF22R14L-23	TCF22R16L-23
Unit Data					
Full Load Amps	(1)	A	472	480	489
Maximum Start Amps		A	262	270	279
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	500	500	500
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
Evaporator					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
External Trace Heating					
Available (fitted by others)		W	500	500	500
Condenser Fan - Per Fan (AC)					
Quantity			12	14	16
Full Load Amps		A	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15
Motor Rating		kW	1.8	1.8	1.8
Condenser Fan - Per Fan (EC)					
Quantity			12	14	16
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)					
Quantity			12	14	16
Full Load Amps		A	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	3.10	3.10	3.1
Compressor - Per Compressor					
Nominal Run Amps		A	210	210	210
Quantity			2	2	2
Motor Rating		kW	129	129	129
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Technical Data

TCF22R18L-23, TCF22R20L-23

Mechanical

Technical FreeCool

			107	108
Mechanical Data	Notes	Units	TCF22R18L-23	TCF22R20L-23
Cooling Duty - AC Fans	(1)	kW	850	900
Nom Input -Cooling Only		kW	239	253
EER	(2)		3.56	3.56
ESEER	(3)		4.53	4.58
SEER	(3)		4.41	4.45
Nominal Output - Free Cooling	(4)	kW	791	864
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	1.0	1.4
Cooling Duty - EC Fans	(1)	kW	850	900
Nom Input -Cooling Only		kW	235	248
EER	(2)		3.62	3.63
ESEER	(3)		5.13	5.24
SEER	(3)		4.95	5.04
Nominal Output - Free Cooling	(4)	kW	832	907
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	1.7	2.0
Cooling Duty - High Airflow EC Fans	(1)	kW	850	900
Nom Input -Cooling Only		kW	232.2	245.6
EER	(2)		3.7	3.7
ESEER	(3)		5.2	5.3
SEER	(3)		4.99	5.08
Nominal Output - Free Cooling	(4)	kW	870.3	947.5
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	2.1	2.4
Capacity Steps	(6)	%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 10550	2800 x 2200 x 11682
Machine Weight	(7)	kg	11170	12040
Operating Weight	(7)	kg	12570	13520
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)	
Evaporator - Type			Flooded - Shell and Tube Evaporator	
Insulation			Class O, UV stable Insulation	
Total Max. Water Flow		l/s	77.9	77.9
Total Min. Water Flow		l/s	25.8	25.8
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins	
Face Area Total		m <sup>2</sup>	42.6	47.4
Maximum Airflow - AC Fans		m <sup>3</sup> /s	91.7	101.9
Maximum Airflow - EC Fans		m <sup>3</sup> /s	103.3	114.8
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	115.1	127.9
Condenser Fan & Motor			Sickle Bladed Axial Fan	
Quantity			18	20
Diameter		mm	800	800
Maximum Speed - AC Fans		rpm	905	905
Maximum Speed - EC Fans		rpm	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor	
Quantity			2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation	
Refrigeration			Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a	
Charge (Total) CCT1 + CCT2		kg	235 + 230	245 + 240
Refrigeration Control			Electronic Expansion Valve (EEV)	
Water System			Grooved Type Coupling and Pipe Assembly	
Water Inlet / Outlet			DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2
Water Volume		l	1405	1481
Minimum System Water Volume	(8)	l	3398	3591
Max System Operating Pressure		Barg	10	10
Flow Rate		l/s	35.7	37.8
Pressure Drop		kPa	105.0	112.5

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCF22R18L-23, TCF22R20L-23

Electrical

			107	108
ELECTRICAL DATA			TCF22R18L-23	TCF22R20L-23
<b>Unit Data</b>				
Full Load Amps	(1)	A	497	506
Maximum Start Amps		A	287	296
Mains Supply		VAC	400V (±10%) 3PH 50Hz	
Recommended Mains Fuse Size		A	560	560
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)	
Independent Permanent Supply Recommended Fuse Size		A	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)	
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG	
Control Circuit		VAC	24 VAC & 230VAC (±10%)	
<b>Evaporator</b>				
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>				
Available (fitted by others)		W	500	500
<b>Condenser Fan - Per Fan (AC)</b>				
Quantity			18	20
Full Load Amps		A	4.3	4.3
Locked Rotor Amps		A	15	15
Motor Rating		kW	1.8	1.8
<b>Condenser Fan - Per Fan (EC)</b>				
Quantity			18	20
Full Load Amps		A	3.9	3.9
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>				
Quantity			18	20
Full Load Amps		A	4.8	4.8
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	3.10	3.10
<b>Compressor - Per Compressor</b>				
Nominal Run Amps		A	210	210
Quantity			2	2
Motor Rating		kW	129	129
Start Amps		A	2	2
Type Of Start			Electronic Soft Start	

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCF23R12S-24, TCF23R14S-24, TCF23R16S-25, TCF23R18S-25

Mechanical

Technical FreeCool

			109	110	111	112
	Notes	Units	TCF23R12S-24	TCF23R14S-24	TCF23R16S-25	TCF23R18S-25
Mechanical Data						
Cooling Duty - AC Fans	(1)	kW	630.0	680.0	730	780
Nom Input -Cooling Only		kW	182	190	200	211
EER	(2)		3.46	3.58	3.65	3.70
ESEER	(3)		4.57	4.65	4.69	4.67
SEER	(3)		4.44	4.53	4.57	4.55
Nominal Output - Free Cooling	(4)	kW	547	622	695	767
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-0.13	0.68	1.29	1.76
Cooling Duty - EC Fans	(1)	kW	630.0	680.0	730.0	780.0
Nom Input -Cooling Only		kW	179	187	196	206
EER	(2)		3.51	3.63	3.73	3.79
ESEER	(3)		5.16	5.32	5.42	5.42
SEER	(3)		4.97	5.12	5.22	5.23
Nominal Output - Free Cooling	(4)	kW	577	654	730	804
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	0.71	1.42	1.93	2.33
Cooling Duty - High Airflow EC Fans	(1)	kW	630.0	680.0	730	780
Nom Input -Cooling Only		kW	177	185	194	204
EER	(2)		3.55	3.68	3.77	3.83
ESEER	(3)		5.20	5.36	5.46	5.46
SEER	(3)		5.01	5.16	5.25	5.26
Nominal Output - Free Cooling	(4)	kW	605	685	762	839
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	1.25	1.88	2.33	2.68
Capacity Steps	(6)	%	10-100%	10-100%	10-100%	10-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 7154	2800 x 2200 x 8286	2800 x 2200 x 9418	2800 x 2200 x 10550
Machine Weight	(7)	kg	8810	9710	10610	11430
Operating Weight	(7)	kg	9830	10840	11890	12770
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)			
Evaporator - Type			Flooded - Shell and Tube Evaporator			
Insulation			Class O, UV stable Insulation			
Total Max. Water Flow		l/s	70.2	70.2	77.9	77.9
Total Min. Water Flow		l/s	23.5	23.5	25.8	25.8
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins			
Face Area Total		m²	28.4	33.2	37.9	42.6
Maximum Airflow - AC Fans		m³/s	61.2	71.3	81.5	91.7
Maximum Airflow - EC Fans		m³/s	68.9	80.4	91.8	103.3
Maximum Airflow - High Airflow EC Fans		m³/s	76.7	89.5	102.3	115.1
Condenser Fan & Motor			Sickle Bladed Axial Fan			
Quantity			12	14	16	18
Diameter		mm	800	800	800	800
Maximum Speed - AC Fans		rpm	905	905	905	905
Maximum Speed - EC Fans		rpm	1025	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor			
Quantity			3	3	3	3
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation			
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a			
Charge (Total) CCT1 + CCT2		kg	320 + 165	330 + 170	325 + 165	330 + 170
Refrigeration Control			Electronic Expansion Valve (EEV)			
Water System			Grooved Type Coupling and Pipe Assembly			
Water Inlet / Outlet			DN150	DN150	DN150	DN150
Water Drain / Bleed - Evap		inch	0.5	0.5	0.5	0.5
Water Volume		l	1026	1138	1282	1343
Minimum System Water Volume	(8)	l	2011	2201	2423	2562
Max System Operating Pressure		Barg	10.0	10.0	10	10
Flow Rate		l/s	26.5	28.6	30.7	32.8
Pressure Drop		kPa	77.0	81.6	83.5	89.5

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCF23R12S-24, TCF23R14S-24, TCF23R16S-25, TCF23R18S-25

Electrical

			109	110	111	112
ELECTRICAL DATA			TCF23R12S-24	TCF23R14S-24	TCF23R16S-25	TCF23R18S-25
Unit Data						
Full Load Amps	(1)	A	457	465	474	482
Maximum Start Amps		A	322	330	339	347
Mains Supply		VAC	400V (±10%) 3PH 50Hz			
Recommended Mains Fuse Size		A	500	500	500	500
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)			
Independent Permanent Supply Recommended Fuse Size		A	25	25	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)			
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG			
Control Circuit		VAC	24 VAC & 230VAC (±10%)			
Evaporator						
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)	500 (2x 250)
External Trace Heating						
Available (fitted by others)		W	500	500	500	500
Condenser Fan - Per Fan (AC)						
Quantity			12	14	16	18
Full Load Amps		A	4.3	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15	15
Motor Rating		kW	1.8	1.8	1.8	1.8
Condenser Fan - Per Fan (EC)						
Quantity			12	14	16	18
Full Load Amps		A	3.9	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)						
Quantity			12	14	16	18
Full Load Amps		A	4.8	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	3.10	3.10	3.1	3.1
Compressor - Per Compressor						
Nominal Run Amps		A	135	135	135	135
Quantity			2	2	2	2
Motor Rating		kW	87	87	87	87
Start Amps		A	2	2	2	2
Type Of Start			Electronic Soft Start			

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Technical Data

TCF24R16S-26, TCF24R18S-26, TCF24R20S-26

Mechanical

Technical FreeCool

			117	118	119
Mechanical Data	Notes	Units	TCF24R16S-26	TCF24R18S-26	TCF24R20S-26
Cooling Duty - AC Fans	(1)	kW	820	860	900
Nom Input -Cooling Only		kW	236	241	247
EER	(2)		3.48	3.57	3.64
ESEER	(3)		4.66	4.69	4.73
SEER	(3)		4.52	4.56	4.60
Nominal Output - Free Cooling	(4)	kW	723	795	864
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	0.1	0.8	1.4
Cooling Duty - EC Fans	(1)	kW	820	860	900
Nom Input -Cooling Only		kW	233	237	242
EER	(2)		3.52	3.63	3.72
ESEER	(3)		5.38	5.48	5.57
SEER	(3)		5.16	5.26	5.35
Nominal Output - Free Cooling	(4)	kW	763	836	907
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	0.9	1.6	2.0
Cooling Duty - High Airflow EC Fans	(1)	kW	820	860	900
Nom Input -Cooling Only		kW	229.9	234.4	239.6
EER	(2)		3.6	3.7	3.8
ESEER	(3)		5.4	5.5	5.6
SEER	(3)		5.20	5.30	5.39
Nominal Output - Free Cooling	(4)	kW	799.4	874.5	947.5
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	1.5	2.0	2.4
Capacity Steps	(6)	%	7.5-100%	7.5-100%	7.5-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 9418	2800 x 2200 x 10550	2800 x 2200 x 11682
Machine Weight	(7)	kg	12020	12940	13930
Operating Weight	(7)	kg	13800	14890	16090
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	99.7	99.7	99.7
Total Min. Water Flow		l/s	33.2	33.2	33.2
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m²	37.9	42.6	47.4
Maximum Airflow - AC Fans		m³/s	81.5	91.7	101.9
Maximum Airflow - EC Fans		m³/s	91.8	103.3	114.8
Maximum Airflow - High Airflow EC Fans		m³/s	102.3	115.1	127.9
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			16	18	20
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	905	905	905
Maximum Speed - EC Fans		rpm	1025	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			4	4	4
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged				R134a	
Charge (Total) CCT1 + CCT2		kg	350 + 345	360 + 350	365 + 365
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN200	DN200	DN200
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	1785	1954	2160
Minimum System Water Volume	(8)	l	2682	2895	3145
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	34.5	36.2	37.8
Pressure Drop		kPa	67.0	67.9	69.6

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

## Technical Data

## TCF24R16S-26, TCF24R18S-26, TCF24R20S-26

## Electrical

			117	118	119
ELECTRICAL DATA			TCF24R16S-26	TCF24R18S-26	TCF24R20S-26
Unit Data					
Full Load Amps	(1)	A	609	617	626
Maximum Start Amps		A	474	482	491
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	630	630	670
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25		25
Independent Permanent Supply			230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
Evaporator					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
External Trace Heating					
Available (fitted by others)		W	500	500	500
Condenser Fan - Per Fan (AC)					
Quantity			16	18	20
Full Load Amps		A	4.3	4.3	4.3
Locked Rotor Amps		A	15	15	15
Motor Rating		kW	1.8	1.8	1.8
Condenser Fan - Per Fan (EC)					
Quantity			16	18	20
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)					
Quantity			16	18	20
Full Load Amps		A	4.8	4.8	4.8
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	3.10	3.10	3.1
Compressor - Per Compressor					
Nominal Run Amps		A	135	135	135
Quantity			2	2	2
Motor Rating		kW	87	87	87
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Technical Data

TCF24R22S-27, TCF24R24S-27

Mechanical

Technical FreeCool

			120	121
Mechanical Data	Notes	Units	TCF24R22S-27	TCF24R24S-27
Cooling Duty - AC Fans	(1)	kW	950	1000
Nom Input -Cooling Only		kW	257	269
EER	(2)		3.69	3.72
ESEER	(3)		4.74	4.75
SEER	(3)		4.61	4.62
Nominal Output - Free Cooling	(4)	kW	936	1007
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	1.8	2.1
Cooling Duty - EC Fans	(1)	kW	950	1000
Nom Input -Cooling Only		kW	251	261
EER	(2)		3.78	3.84
ESEER	(3)		5.63	5.67
SEER	(3)		5.41	5.45
Nominal Output - Free Cooling	(4)	kW	981	1054
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	2.4	2.6
Cooling Duty - High Airflow EC Fans	(1)	kW	950	1000
Nom Input -Cooling Only		kW	248.6	258.1
EER	(2)		3.8	3.9
ESEER	(3)		5.7	5.7
SEER	(3)		5.44	5.48
Nominal Output - Free Cooling	(4)	kW	1023.7	1099.2
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	2.7	2.9
Capacity Steps	(6)	%	7.5-100%	7.5-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 12814	2800 x 2200 x 13946
Machine Weight	(7)	kg	14750	15740
Operating Weight	(7)	kg	17040	18280
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)	
Evaporator - Type			Flooded - Shell and Tube Evaporator	
Insulation			Class O, UV stable Insulation	
Total Max. Water Flow		l/s	104.2	104.2
Total Min. Water Flow		l/s	34.6	34.6
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins	
Face Area Total		m <sup>2</sup>	52.1	56.8
Maximum Airflow - AC Fans		m <sup>3</sup> /s	112.1	122.3
Maximum Airflow - EC Fans		m <sup>3</sup> /s	126.3	137.8
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	140.7	153.4
Condenser Fan & Motor			Sickle Bladed Axial Fan	
Quantity			22	24
Diameter		mm	800	800
Maximum Speed - AC Fans		rpm	905	905
Maximum Speed - EC Fans		rpm	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor	
Quantity			4	4
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation	
Refrigeration			Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a	
Charge (Total) CCT1 + CCT2		kg	360 + 365	375 + 370
Refrigeration Control			Electronic Expansion Valve (EEV)	
Water System			Grooved Type Coupling and Pipe Assembly	
Water Inlet / Outlet			DN200	DN200
Water Drain / Bleed - Evap		inch	1/2	1/2
Water Volume		l	2298	2544
Minimum System Water Volume	(8)	l	3338	3638
Max System Operating Pressure		Barg	10	10
Flow Rate		l/s	40.0	42.1
Pressure Drop		kPa	71.4	75.6

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale



Technical Data

TCF24R22S-27, TCF24R24S-27

Electrical

			120	121
ELECTRICAL DATA			TCF24R22S-27	TCF24R24S-27
<b>Unit Data</b>				
Full Load Amps	(1)	A	635	643
Maximum Start Amps		A	500	508
Mains Supply		VAC	400V (±10%) 3PH 50Hz	
Recommended Mains Fuse Size		A	670	670
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)	
Independent Permanent Supply Recommended Fuse Size		A	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)	
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG	
Control Circuit		VAC	24 VAC & 230VAC (±10%)	
<b>Evaporator</b>				
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>				
Available (fitted by others)		W	500	500
<b>Condenser Fan - Per Fan (AC)</b>				
Quantity			22	24
Full Load Amps		A	4.3	4.3
Locked Rotor Amps		A	15	15
Motor Rating		kW	1.8	1.8
<b>Condenser Fan - Per Fan (EC)</b>				
Quantity			22	24
Full Load Amps		A	3.9	3.9
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>				
Quantity			22	24
Full Load Amps		A	4.8	4.8
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	3.10	3.10
<b>Compressor - Per Compressor</b>				
Nominal Run Amps		A	135	135
Quantity			2	2
Motor Rating		kW	87	87
Start Amps		A	2	2
Type Of Start			Electronic Soft Start	

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCF24R22L-21, TCF24R24L-21

Mechanical

			122	123
Mechanical Data	Notes	Units	TCF24R22L-21	TCF24R24L-21
Cooling Duty - AC Fans	(1)	kW	1100	1160
Nom Input -Cooling Only		kW	334	342
EER	(2)		3.30	3.39
ESEER	(3)		4.64	4.65
SEER	(3)		4.49	4.51
Nominal Output - Free Cooling	(4)	kW	986	1064
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	0.4	0.7
Cooling Duty - EC Fans	(1)	kW	1100	1160
Nom Input -Cooling Only		kW	329	338
EER	(2)		3.34	3.44
ESEER	(3)		5.26	5.33
SEER	(3)		5.05	5.11
Nominal Output - Free Cooling	(4)	kW	1039	1119
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	1.2	1.5
Cooling Duty - High Airflow EC Fans	(1)	kW	1100	1160
Nom Input -Cooling Only		kW	324.9	333.6
EER	(2)		3.4	3.5
ESEER	(3)		5.3	5.4
SEER	(3)		5.09	5.14
Nominal Output - Free Cooling	(4)	kW	1088.6	1171.5
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	1.6	1.9
Capacity Steps	(6)	%	7.5-100%	7.5-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 12814	2800 x 2200 x 13946
Machine Weight	(7)	kg	14960	15970
Operating Weight	(7)	kg	17260	18520
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)	
Evaporator - Type			Flooded - Shell and Tube Evaporator	
Insulation			Class O, UV stable Insulation	
Total Max. Water Flow		l/s	108.5	108.5
Total Min. Water Flow		l/s	36.2	36.2
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins	
Face Area Total		m <sup>2</sup>	52.1	56.8
Maximum Airflow - AC Fans		m <sup>3</sup> /s	112.1	122.3
Maximum Airflow - EC Fans		m <sup>3</sup> /s	126.3	137.8
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	140.7	153.4
Condenser Fan & Motor			Sickle Bladed Axial Fan	
Quantity			22	24
Diameter		mm	800	800
Maximum Speed - AC Fans		rpm	905	905
Maximum Speed - EC Fans		rpm	1025	1025
Maximum Speed - High Airflow EC Fans		rpm	1100	1100
Compressor - Type			Turbocor - Oil Free Compressor	
Quantity			4	4
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation	
Refrigeration			Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a	
Charge (Total) CCT1 + CCT2		kg	365 + 370	380 + 380
Refrigeration Control			Electronic Expansion Valve (EEV)	
Water System			Grooved Type Coupling and Pipe Assembly	
Water Inlet / Outlet			DN200	DN200
Water Drain / Bleed - Evap		inch	1/2	1/2
Water Volume		l	2309	2554
Minimum System Water Volume	(8)	l	3513	3823
Max System Operating Pressure		Barg	10	10
Flow Rate		l/s	46.3	48.8
Pressure Drop		kPa	90.5	96.1

Technical FreeCool

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

## Technical Data

## TCF24R22L-21, TCF24R24L-21

## Electrical

			122	123
ELECTRICAL DATA			TCF24R22L-21	TCF24R24L-21
Unit Data				
Full Load Amps	(1)	A	935	943
Maximum Start Amps		A	725	733
Mains Supply		VAC	400V (±10%) 3PH 50Hz	
Recommended Mains Fuse Size		A	1000	1000
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)	
Independent Permanent Supply Recommended Fuse Size		A	25	25
Independent Permanent Supply			230V 1PH 50Hz (±10%)	
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG	
Control Circuit		VAC	24 VAC & 230VAC (±10%)	
Evaporator				
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)
External Trace Heating				
Available (fitted by others)		W	500	500
Condenser Fan - Per Fan (AC)				
Quantity			22	24
Full Load Amps		A	4.3	4.3
Locked Rotor Amps		A	15	15
Motor Rating		kW	1.8	1.8
Condenser Fan - Per Fan (EC)				
Quantity			22	24
Full Load Amps		A	3.9	3.9
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)				
Quantity			22	24
Full Load Amps		A	4.8	4.8
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	3.10	3.10
Compressor - Per Compressor				
Nominal Run Amps		A	210	210
Quantity			2	2
Motor Rating		kW	129	129
Start Amps		A	2	2
Type Of Start			Electronic Soft Start	

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

**Technical Data -TCF (X) TCF11X06S-07, TCF11X08S-07, TCF11X06L-11**

**Mechanical**

Technical FreeCool

			124	125	126
Mechanical Data	Notes	Units	TCF11X06S-07	TCF11X08S-07	TCF11X06L-11
Cooling Duty - AC Fans	(1)	kW	250	260	350
Nom Input -Cooling Only		kW	69	68	116
EER	(2)		3.64	3.84	3.02
ESEER	(3)		4.69	4.84	4.23
SEER	(3)		4.57	4.71	4.09
Nominal Output - Free Cooling	(4)	kW	224	275	245
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	0.3	2.8	-4.0
Cooling Duty - EC Fans	(1)	kW	250	260	350
Nom Input -Cooling Only		kW	66	64	113
EER	(2)		3.79	4.06	3.09
ESEER	(3)		5.37	5.79	4.63
SEER	(3)		5.18	5.58	4.45
Nominal Output - Free Cooling	(4)	kW	224	275	245
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	0.3	2.8	-4.0
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	30-100%	30-100%	30-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 3758	2800 x 2200 x 4890	2800 x 2200 x 3758
Machine Weight	(7)	kg	4075	4885	4505
Operating Weight	(7)	kg	4535	5445	5055
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	25.0	25.0	30.5
Total Min. Water Flow		l/s	8.3	8.3	10.0
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	14.2	18.9	14.2
Maximum Airflow - AC Fans		m <sup>3</sup> /s	23.3	31.1	23.3
Maximum Airflow - EC Fans		m <sup>3</sup> /s	23.3	31.1	23.3
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			6	8	6
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	710	710	710
Maximum Speed - EC Fans		rpm	715	715	715
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			1	1	1
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged				R134a	
Charge (Total) CCT1 + CCT2		kg	135	150	195
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN100	DN100	DN125
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	424	514	513
Minimum System Water Volume	(8)	l	1597	1733	2154
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	10.5	10.9	14.7
Pressure Drop		kPa	72.7	70.9	88.7

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCF11X06S-07, TCF11X08S-07, TCF11X06L-11

Electrical

ELECTRICAL DATA			124	125	126
			TCF11X06S-07	TCF11X08S-07	TCF11X06L-11
Unit Data	(1)	A	150	155	225
Full Load Amps		A	2	2	2
Maximum Start Amps		VAC	400V (±10%) 3PH 50Hz		
Mains Supply		A	160	200	250
Recommended Mains Fuse Size		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		A	25	25	251
Independent Permanent Supply Recommended Fuse Size		VAC	230V 1PH 50Hz (±10%)		
Independent Permanent Supply		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		VAC	24 VAC & 230VAC (±10%)		
Control Circuit					
Evaporator					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
External Trace Heating					
Available (fitted by others)		W	500	500	500
Condenser Fan - Per Fan (AC)					
Quantity			6	8	6
Full Load Amps		A	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.27
Condenser Fan - Per Fan (EC)					
Quantity			6	8	6
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)					
Quantity			N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A
Compressor - Per Compressor					
Nominal Run Amps		A	135	135	210
Quantity			1	1	1
Motor Rating		kW	87	87	129
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCF11X08L-08, TCF11X10L-10, TCF12X08S-09

Mechanical

Technical FreeCool

			127	128	129
Mechanical Data	Notes	Units	TCF11X08L-08	TCF11X10L-10	TCF12X08S-09
Cooling Duty - AC Fans	(1)	kW	385	410	430
Nom Input -Cooling Only		kW	117	114	137
EER	(2)		3.30	3.58	3.14
ESEER	(3)		4.47	4.58	4.56
SEER	(3)		4.33	4.46	4.38
Nominal Output - Free Cooling	(4)	kW	311	371	324
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-1.3	0.5	-3.4
Cooling Duty - EC Fans	(1)	kW	385	410	430
Nom Input -Cooling Only		kW	113	110	133
EER	(2)		3.41	3.73	3.23
ESEER	(3)		5.06	5.39	5.19
SEER	(3)		4.86	5.18	4.95
Nominal Output - Free Cooling	(4)	kW	311	371	324
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-1.3	0.5	-3.4
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	30-100%	30-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 4890	2800 x 2200 x 6022	2800 x 2200 x 4890
Machine Weight	(7)	kg	5130	6190	5510
Operating Weight	(7)	kg	5760	6915	5950
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	43.6	37.5	50.0
Total Min. Water Flow		l/s	14.4	12.5	16.7
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	18.9	23.7	18.9
Maximum Airflow - AC Fans		m <sup>3</sup> /s	31.1	38.9	31.1
Maximum Airflow - EC Fans		m <sup>3</sup> /s	31.1	38.9	31.1
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			8	10	8
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	710	710	710
Maximum Speed - EC Fans		rpm	715	715	715
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			1	1	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged				R134a	
Charge (Total) CCT1 + CCT2		kg	195	305	195
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN125	DN125	DN125
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	586	673	401
Minimum System Water Volume	(8)	l	2391	2595	1409
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	16.2	17.2	18.1
Pressure Drop		kPa	63.5	76.2	73.2

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCF11X08L-08, TCF11X10L-10, TCF12X08S-09

Electrical

ELECTRICAL DATA			127	128	129
			TCF11X08L-08	TCF11X10L-10	TCF12X08S-09
<b>Unit Data</b>					
Full Load Amps	(1)	A	230	235	290
Maximum Start Amps		A	2	2	155
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	250	250	315
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>					
Available (fitted by others)		W	500	500	500
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			8	10	8
Full Load Amps		A	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			8	10	8
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	210	210	135
Quantity			1	1	2
Motor Rating		kW	129	129	87
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

FreeCool  
Technical

Technical Data

TCF12X10S-05, TCF12X12S-05, TCF12X14S-05

Mechanical

Technical FreeCool

			130	131	132
Mechanical Data	Notes	Units	TCF12X10S-05	TCF12X12S-05	TCF12X14S-05
Cooling Duty - AC Fans	(1)	kW	460	490	520
Nom Input -Cooling Only		kW	132	134	138
EER	(2)		3.49	3.66	3.75
ESEER	(3)		4.79	4.84	4.88
SEER	(3)		4.64	4.70	4.74
Nominal Output - Free Cooling	(4)	kW	389	450	509
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-1.3	0.1	1.1
Cooling Duty - EC Fans	(1)	kW	460	490	520
Nom Input -Cooling Only		kW	127	128	132
EER	(2)		3.62	3.82	3.93
ESEER	(3)		5.51	5.64	5.75
SEER	(3)		5.28	5.41	5.52
Nominal Output - Free Cooling	(4)	kW	389	450	509
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-1.3	0.1	1.1
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 6022	2800 x 2200 x 7154	2800 x 2200 x 8286
Machine Weight	(7)	kg	6585	7465	8325
Operating Weight	(7)	kg	7335	8335	9335
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	50.0	50.0	50.0
Total Min. Water Flow		l/s	16.7	16.7	16.7
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	23.7	28.4	33.2
Maximum Airflow - AC Fans		m <sup>3</sup> /s	38.9	46.6	54.4
Maximum Airflow - EC Fans		m <sup>3</sup> /s	38.9	46.6	54.4
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			10	12	14
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	710	710	710
Maximum Speed - EC Fans		rpm	715	715	715
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged			R134a		
Charge (Total) CCT1 + CCT2		kg	275	295	310
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN125	DN125	DN125
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	700	819	943
Minimum System Water Volume	(8)	l	1778	1968	2162
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	19.3	20.6	21.9
Pressure Drop		kPa	79.9	83.4	89.0

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale



Technical Data

TCF12X10S-05, TCF12X12S-05, TCF12X14S-05

Electrical

			130	131	132
ELECTRICAL DATA			TCF12X10S-05	TCF12X12S-05	TCF12X14S-05
<b>Unit Data</b>					
Full Load Amps	(1)	A	295	300	305
Maximum Start Amps		A	160	165	170
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	315	315	315
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>					
Available (fitted by others)		W	500	500	500
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			10	12	14
Full Load Amps		A	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			10	12	14
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	135	135	135
Quantity			2	2	2
Motor Rating		kW	129	87	87
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

FreeCool  
Technical

Technical Data

TCF12X12L-12, TCF12X14L-12, TCF12X16L-12

Mechanical

Technical FreeCool

			133	134	135
Mechanical Data	Notes	Units	TCF12X12L-12	TCF12X14L-12	TCF12X16L-12
Cooling Duty - AC Fans	(1)	kW	630	710	760
Nom Input -Cooling Only		kW	199	215	223
EER	(2)		3.17	3.30	3.41
ESEER	(3)		4.61	4.69	4.76
SEER	(3)		4.44	4.53	4.60
Nominal Output - Free Cooling	(4)	kW	478	552	620
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-2.5	-2.0	-1.2
Cooling Duty - EC Fans	(1)	kW	630	710	760
Nom Input -Cooling Only		kW	194	209	215
EER	(2)		3.25	3.39	3.53
ESEER	(3)		5.22	5.36	5.48
SEER	(3)		4.99	5.12	5.24
Nominal Output - Free Cooling	(4)	kW	478	552	620
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-2.5	-2.0	-1.2
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 7154	2800 x 2200 x 8286	2800 x 2200 x 9418
Machine Weight	(7)	kg	8215	9075	9960
Operating Weight	(7)	kg	9285	10295	11295
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	70.3	70.3	70.3
Total Min. Water Flow		l/s	23.3	23.3	23.3
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	28.4	33.2	37.9
Maximum Airflow - AC Fans		m <sup>3</sup> /s	46.6	54.4	62.2
Maximum Airflow - EC Fans		m <sup>3</sup> /s	46.6	54.4	62.2
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			12	14	16
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	710	710	710
Maximum Speed - EC Fans		rpm	715	715	715
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Single Circuit	Single Circuit	Single Circuit
Refrigerant Pre-charged			R134a		
Charge (Total) CCT1 + CCT2		kg	405	420	440
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN150	DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	991	1144	1251
Minimum System Water Volume	(8)	l	2468	2809	3033
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	26.5	29.9	32.0
Pressure Drop		kPa	77.7	88.8	94.8

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCF12X12L-12, TCF12X14L-12, TCF12X16L-12

Electrical

			133	134	135
ELECTRICAL DATA			TCF12X12L-12	TCF12X14L-12	TCF12X16L-12
<b>Unit Data</b>					
Full Load Amps	(1)	A	450	455	460
Maximum Start Amps		A	240	245	250
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	500	500	500
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>					
Available (fitted by others)		W	500	500	500
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			12	14	16
Full Load Amps		A	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			12	14	16
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	210	210	210
Quantity			2	2	2
Motor Rating		kW	129	129	129
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCF12X18L-13, TCF12X20L-13

Mechanical

Technical FreeCool

			136	137
Mechanical Data	Notes	Units	TCF12X18L-13	TCF12X20L-13
Cooling Duty - AC Fans	(1)	kW	810	860
Nom Input -Cooling Only		kW	236	250
EER	(2)		3.43	3.44
ESEER	(3)		4.77	4.77
SEER	(3)		4.61	4.61
Nominal Output - Free Cooling	(4)	kW	686	752
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-0.5	-0.0
Cooling Duty - EC Fans	(1)	kW	810	860
Nom Input -Cooling Only		kW	228	241
EER	(2)		3.56	3.57
ESEER	(3)		5.52	5.55
SEER	(3)		5.28	5.30
Nominal Output - Free Cooling	(4)	kW	686	752
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-0.5	-0.0
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A
EER	(2)		N/A	N/A
ESEER	(3)		N/A	N/A
SEER	(3)		N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 10550	2800 x 2200 x 11682
Machine Weight	(7)	kg	10745	11630
Operating Weight	(7)	kg	12210	13210
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)	
Evaporator - Type			Flooded - Shell and Tube Evaporator	
Insulation			Class O, UV stable Insulation	
Total Max. Water Flow		l/s	74.2	74.2
Total Min. Water Flow		l/s	24.7	24.7
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins	
Face Area Total		m <sup>2</sup>	42.6	47.4
Maximum Airflow - AC Fans		m <sup>3</sup> /s	70.0	77.7
Maximum Airflow - EC Fans		m <sup>3</sup> /s	70.0	77.7
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan	
Quantity			18	20
Diameter		mm	800	800
Maximum Speed - AC Fans		rpm	710	710
Maximum Speed - EC Fans		rpm	715	715
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor	
Quantity			2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation	
Refrigeration			Single Circuit	Single Circuit
Refrigerant Pre-charged			R134a	
Charge (Total) CCT1 + CCT2		kg	430	445
Refrigeration Control			Electronic Expansion Valve (EEV)	
Water System			Grooved Type Coupling and Pipe Assembly	
Water Inlet / Outlet			DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2
Water Volume		l	1365	1478
Minimum System Water Volume	(8)	l	3265	3495
Max System Operating Pressure		Barg	10	10
Flow Rate		l/s	34.1	36.2
Pressure Drop		kPa	99.3	107.6

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCF12X18L-13, TCF12X20L-13

Electrical

			136	137
ELECTRICAL DATA			TCF12X18L-13	TCF12X20L-13
<b>Unit Data</b>				
Full Load Amps	(1)	A	465	470
Maximum Start Amps		A	255	260
Mains Supply		VAC	400V (±10%) 3PH 50Hz	
Recommended Mains Fuse Size		A	500	500
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)	
Independent Permanent Supply Recommended Fuse Size		A	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)	
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG	
Control Circuit		VAC	24 VAC & 230VAC (±10%)	
<b>Evaporator</b>				
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>				
Available (fitted by others)		W	500	500
<b>Condenser Fan - Per Fan (AC)</b>				
Quantity			18	20
Full Load Amps		A	2.5	2.5
Locked Rotor Amps		A	8.8	8.8
Motor Rating		kW	1.3	1.3
<b>Condenser Fan - Per Fan (EC)</b>				
Quantity			18	20
Full Load Amps		A	3.9	3.9
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>				
Quantity			N/A	N/A
Full Load Amps		A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	N/A	N/A
<b>Compressor - Per Compressor</b>				
Nominal Run Amps		A	210	210
Quantity			2	2
Motor Rating		kW	129	129
Start Amps		A	2	2
Type Of Start			Electronic Soft Start	

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCF22X10S-22, TCF22X12S-22, TCF22X14S-22

Mechanical

Technical FreeCool

			138	139	140
Mechanical Data	Notes	Units	TCF22X10S-22	TCF22X12S-22	TCF22X14S-22
Cooling Duty - AC Fans	(1)	kW	460	490	520
Nom Input -Cooling Only		kW	132	134	139
EER	(2)		3.49	3.66	3.75
ESEER	(3)		4.56	4.67	4.76
SEER	(3)		4.43	4.55	4.64
Nominal Output - Free Cooling	(4)	kW	384	444	503
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-0.8	0.6	1.5
Cooling Duty - EC Fans	(1)	kW	460	490	520
Nom Input -Cooling Only		kW	127	129	132
EER	(2)		3.61	3.81	3.93
ESEER	(3)		4.92	5.28	5.47
SEER	(3)		4.77	5.10	5.29
Nominal Output - Free Cooling	(4)	kW	384	444	503
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-0.8	0.6	1.5
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 6022	2800 x 2200 x 7154	2800 x 2200 x 8286
Machine Weight	(7)	kg	6690	7570	8490
Operating Weight	(7)	kg	7420	8400	9460
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	49.9	49.9	49.9
Total Min. Water Flow		l/s	16.7	16.7	16.7
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m²	23.7	28.4	33.2
Maximum Airflow - AC Fans		m³/s	38.9	46.6	54.4
Maximum Airflow - EC Fans		m³/s	38.9	46.6	54.4
Maximum Airflow - High Airflow EC Fans		m³/s	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			10	12	14
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	710	710	710
Maximum Speed - EC Fans		rpm	715	715	715
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged				R134a	
Charge (Total) CCT1 + CCT2		kg	150 + 145	160 + 155	165 + 160
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN125	DN125	DN125
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	735	830	975
Minimum System Water Volume	(8)	l	1814	1979	2194
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	19.3	20.6	21.9
Pressure Drop		kPa	78.3	82.1	87.9

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCF22X10S-22, TCF22X12S-22, TCF22X14S-22

Electrical

			138	139	140
ELECTRICAL DATA			TCF22X10S-22	TCF22X12S-22	TCF22X14S-22
<b>Unit Data</b>					
Full Load Amps	(1)	A	295	300	305
Maximum Start Amps		A	160	165	170
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	315	315	315
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>					
Available (fitted by others)		W	500	500	500
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			10	12	14
Full Load Amps		A	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			10	12	14
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	135	135	135
Quantity			2	2	2
Motor Rating		kW	87	87	87
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

FreeCool  
Technical

Technical Data

TCF22X12L-23, TCF22X14L-23, TCF22X16L-23

Mechanical

Technical FreeCool

			141	142	143
Mechanical Data	Notes	Units	TCF22X12L-23	TCF22X14L-23	TCF22X16L-23
Cooling Duty - AC Fans	(1)	kW	630	710	760
Nom Input -Cooling Only		kW	197	216	222
EER	(2)		3.20	3.28	3.42
ESEER	(3)		4.27	4.41	4.52
SEER	(3)		4.14	4.28	4.39
Nominal Output - Free Cooling	(4)	kW	478	552	620
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-2.5	-2.0	-1.2
Cooling Duty - EC Fans	(1)	kW	630	710	760
Nom Input -Cooling Only		kW	192	210	215
EER	(2)		3.29	3.38	3.54
ESEER	(3)		4.62	4.81	4.99
SEER	(3)		4.46	4.64	4.81
Nominal Output - Free Cooling	(4)	kW	478	552	620
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-2.5	-2.0	-1.2
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 7154	2800 x 2200 x 8286	2800 x 2200 x 9418
Machine Weight	(7)	kg	8480	9440	10270
Operating Weight	(7)	kg	9500	10640	11550
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	77.9	77.9	77.9
Total Min. Water Flow		l/s	25.8	25.8	25.8
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m <sup>2</sup>	28.4	33.2	37.9
Maximum Airflow - AC Fans		m <sup>3</sup> /s	46.6	54.4	62.2
Maximum Airflow - EC Fans		m <sup>3</sup> /s	46.6	54.4	62.2
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			12	14	16
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	710	710	710
Maximum Speed - EC Fans		rpm	715	715	715
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			2	2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged				R134a	
Charge (Total) CCT1 + CCT2		kg	220 + 215	225 + 220	235 + 225
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN150	DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	1027	1204	1282
Minimum System Water Volume	(8)	l	2504	2868	3064
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	26.5	29.9	32.0
Pressure Drop		kPa	73.9	84.3	89.6

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale



Technical Data

TCF22X12L-23, TCF22X14L-23, TCF22X16L-23

Electrical

		141	142	143
ELECTRICAL DATA		TCF22X12L-23	TCF22X14L-23	TCF22X16L-23
<b>Unit Data</b>				
Full Load Amps	(1) A	450	455	460
Maximum Start Amps	A	240	245	250
Mains Supply	VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size	A	500	500	500
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)	mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size	A	25	25	25
Independent Permanent Supply	VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)	mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit	VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>				
Immersion Heater Rating	W	500 (2x 250)	500 (2x 250)	500 (2x 250)
<b>External Trace Heating</b>				
Available (fitted by others)	W	500	500	500
<b>Condenser Fan - Per Fan (AC)</b>				
Quantity		12	14	16
Full Load Amps	A	2.5	2.5	2.5
Locked Rotor Amps	A	8.8	8.8	8.8
Motor Rating	kW	1.3	1.3	1.3
<b>Condenser Fan - Per Fan (EC)</b>				
Quantity		12	14	16
Full Load Amps	A	3.9	3.9	3.9
Locked Rotor Amps	A	N/A	N/A	N/A
Motor Rating	kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>				
Quantity		N/A	N/A	N/A
Full Load Amps	A	N/A	N/A	N/A
Locked Rotor Amps	A	N/A	N/A	N/A
Motor Rating	kW	N/A	N/A	N/A
<b>Compressor - Per Compressor</b>				
Nominal Run Amps	A	210	210	210
Quantity		2	2	2
Motor Rating	kW	129	129	129
Start Amps	A	2	2	2
Type Of Start		Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCF22X18L-23, TCF22X20L-23

Mechanical

Technical FreeCool

			144	145
Mechanical Data	Notes	Units	TCF22X18L-23	TCF22X20L-23
Cooling Duty - AC Fans	(1)	kW	810	860
Nom Input -Cooling Only		kW	234	253
EER	(2)		3.46	3.41
ESEER	(3)		4.61	4.68
SEER	(3)		4.47	4.53
Nominal Output - Free Cooling	(4)	kW	686	752
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-0.5	-0.0
Cooling Duty - EC Fans	(1)	kW	810	860
Nom Input -Cooling Only		kW	226	243
EER	(2)		3.59	3.53
ESEER	(3)		5.14	5.26
SEER	(3)		4.95	5.06
Nominal Output - Free Cooling	(4)	kW	686	752
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-0.5	-0.0
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A
EER	(2)		N/A	N/A
ESEER	(3)		N/A	N/A
SEER	(3)		N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 10550	2800 x 2200 x 11682
Machine Weight	(7)	kg	11170	12040
Operating Weight	(7)	kg	12570	13520
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)	
Evaporator - Type			Flooded - Shell and Tube Evaporator	
Insulation			Class O, UV stable Insulation	
Total Max. Water Flow		l/s	77.9	77.9
Total Min. Water Flow		l/s	25.8	25.8
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins	
Face Area Total		m <sup>2</sup>	42.6	47.4
Maximum Airflow - AC Fans		m <sup>3</sup> /s	70.0	77.7
Maximum Airflow - EC Fans		m <sup>3</sup> /s	70.0	77.7
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan	
Quantity			18	20
Diameter		mm	800	800
Maximum Speed - AC Fans		rpm	710	710
Maximum Speed - EC Fans		rpm	715	715
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor	
Quantity			2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation	
Refrigeration			Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a	
Charge (Total) CCT1 + CCT2		kg	235 + 230	245 + 240
Refrigeration Control			Electronic Expansion Valve (EEV)	
Water System			Grooved Type Coupling and Pipe Assembly	
Water Inlet / Outlet			DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2
Water Volume		l	1405	1481
Minimum System Water Volume	(8)	l	3305	3497
Max System Operating Pressure		Barg	10	10
Flow Rate		l/s	34.1	36.2
Pressure Drop		kPa	96.4	103.7

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

## Technical Data

## TCF22X18L-23, TCF22X20L-23

## Electrical

			144	145
ELECTRICAL DATA			TCF22X18L-23	TCF22X20L-23
Unit Data				
Full Load Amps	(1)	A	465	470
Maximum Start Amps		A	255	260
Mains Supply		VAC	400V (±10%) 3PH 50Hz	
Recommended Mains Fuse Size		A	500	500
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)	
Independent Permanent Supply Recommended Fuse Size		A	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)	
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG	6mm <sup>2</sup> / 8 AWG
Control Circuit		VAC	24 VAC & 230VAC (±10%)	
Evaporator				
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)
External Trace Heating				
Available (fitted by others)		W	500	500
Condenser Fan - Per Fan (AC)				
Quantity			18	20
Full Load Amps		A	2.5	2.5
Locked Rotor Amps		A	8.8	8.8
Motor Rating		kW	1.3	1.3
Condenser Fan - Per Fan (EC)				
Quantity			18	20
Full Load Amps		A	3.9	3.9
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)				
Quantity			N/A	N/A
Full Load Amps		A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	N/A	N/A
Compressor - Per Compressor				
Nominal Run Amps		A	210	210
Quantity			2	2
Motor Rating		kW	129	129
Start Amps		A	2	2
Type Of Start			Electronic Soft Start	

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Technical Data

TCC22X18L-23, TCF22X20L-23

Mechanical

Technical FreeCool

			144	145
Mechanical Data	Notes	Units	TCF22X18L-23	TCF22X20L-23
Cooling Duty - AC Fans	(1)	kW	810	860
Nom Input -Cooling Only		kW	234	253
EER	(2)		3.46	3.41
ESEER	(3)		4.61	4.68
SEER	(3)		4.47	4.53
Nominal Output - Free Cooling	(4)	kW	686	752
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-0.5	-0.0
Cooling Duty - EC Fans	(1)	kW	810	860
Nom Input -Cooling Only		kW	226	243
EER	(2)		3.59	3.53
ESEER	(3)		5.14	5.26
SEER	(3)		4.95	5.06
Nominal Output - Free Cooling	(4)	kW	686	752
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-0.5	-0.0
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A
EER	(2)		N/A	N/A
ESEER	(3)		N/A	N/A
SEER	(3)		N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A
Capacity Steps	(6)	%	15-100%	15-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 10550	2800 x 2200 x 11682
Machine Weight	(7)	kg	11170	12040
Operating Weight	(7)	kg	12570	13520
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)	
Evaporator - Type			Flooded - Shell and Tube Evaporator	
Insulation			Class O, UV stable Insulation	
Total Max. Water Flow		l/s	77.9	77.9
Total Min. Water Flow		l/s	25.8	25.8
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins	
Face Area Total		m <sup>2</sup>	42.6	47.4
Maximum Airflow - AC Fans		m <sup>3</sup> /s	70.0	77.7
Maximum Airflow - EC Fans		m <sup>3</sup> /s	70.0	77.7
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan	
Quantity			18	20
Diameter		mm	800	800
Maximum Speed - AC Fans		rpm	710	710
Maximum Speed - EC Fans		rpm	715	715
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor	
Quantity			2	2
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation	
Refrigeration			Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a	
Charge (Total) CCT1 + CCT2		kg	235 + 230	245 + 240
Refrigeration Control			Electronic Expansion Valve (EEV)	
Water System			Grooved Type Coupling and Pipe Assembly	
Water Inlet / Outlet			DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2
Water Volume		l	1405	1481
Minimum System Water Volume	(8)	l	3305	3497
Max System Operating Pressure		Barg	10	10
Flow Rate		l/s	34.1	36.2
Pressure Drop		kPa	96.4	103.7

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCC22X18L-23, TCF22X20L-23

Electrical

			144	145
ELECTRICAL DATA			TCF22X18L-23	TCF22X20L-23
Unit Data				
Full Load Amps	(1)	A	465	470
Maximum Start Amps		A	255	260
Mains Supply		VAC	400V (±10%) 3PH 50Hz	
Recommended Mains Fuse Size		A	500	500
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)	
Independent Permanent Supply Recommended Fuse Size		A	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)	
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG	6mm <sup>2</sup> / 8 AWG
Control Circuit		VAC	24 VAC & 230VAC (±10%)	
Evaporator				
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)
External Trace Heating				
Available (fitted by others)		W	500	500
Condenser Fan - Per Fan (AC)				
Quantity			18	20
Full Load Amps		A	2.5	2.5
Locked Rotor Amps		A	8.8	8.8
Motor Rating		kW	1.3	1.3
Condenser Fan - Per Fan (EC)				
Quantity			18	20
Full Load Amps		A	3.9	3.9
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)				
Quantity			N/A	N/A
Full Load Amps		A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A
Motor Rating		kW	N/A	N/A
Compressor - Per Compressor				
Nominal Run Amps		A	210	210
Quantity			2	2
Motor Rating		kW	129	129
Start Amps		A	2	2
Type Of Start			Electronic Soft Start	

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCF23X12S-24, TCF23X14S-24, TCF23X16S-25, TCF23X18S-25

Mechanical

Technical FreeCool

			146	147	148	149
Mechanical Data	Notes	Units	TCF23X12S-24	TCF23X14S-24	TCF23X16S-25	TCF23X18S-25
Cooling Duty - AC Fans	(1)	kW	590	640	690	740
Nom Input -Cooling Only		kW	180	186	194	203
EER	(2)		3.28	3.45	3.56	3.65
ESEER	(3)		4.62	4.72	4.78	4.84
SEER	(3)		4.47	4.58	4.63	4.70
Nominal Output - Free Cooling	(4)	kW	469	536	602	668
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-1.6	-0.7	-0.0	0.5
Cooling Duty - EC Fans	(1)	kW	590	640	690	740
Nom Input -Cooling Only		kW	174	179	186	194
EER	(2)		3.39	3.57	3.70	3.81
ESEER	(3)		5.18	5.33	5.44	5.54
SEER	(3)		4.97	5.13	5.23	5.33
Nominal Output - Free Cooling	(4)	kW	469	536	602	668
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-1.6	-0.7	-0.0	0.5
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Capacity Steps	(6)	%	10-100%	10-100%	10-100%	10-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 7154	2800 x 2200 x 8286	2800 x 2200 x 9418	2800 x 2200 x 10550
Machine Weight	(7)	kg	8810	9710	10610	11430
Operating Weight	(7)	kg	9830	10840	11890	12770
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)			
Evaporator - Type			Flooded - Shell and Tube Evaporator			
Insulation			Class O, UV stable Insulation			
Total Max. Water Flow		l/s	70.2	70.2	77.9	77.9
Total Min. Water Flow		l/s	23.5	23.5	25.8	25.8
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins			
Face Area Total		m <sup>2</sup>	28.4	33.2	37.9	42.6
Maximum Airflow - AC Fans		m <sup>3</sup> /s	46.6	54.4	62.2	70.0
Maximum Airflow - EC Fans		m <sup>3</sup> /s	46.6	54.4	62.2	70.0
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan			
Quantity			12	14	16	18
Diameter		mm	800	800	800	800
Maximum Speed - AC Fans		rpm	710	710	710	710
Maximum Speed - EC Fans		rpm	715	715	715	715
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor			
Quantity			3	3	3	3
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation			
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a			
Charge (Total) CCT1 + CCT2		kg	320 + 165	330 + 170	325 + 165	330 + 170
Refrigeration Control			Electronic Expansion Valve (EEV)			
Water System			Grooved Type Coupling and Pipe Assembly			
Water Inlet / Outlet			DN150	DN150	DN150	DN150
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2	0.5
Water Volume		l	1026	1138	1282	1343
Minimum System Water Volume	(8)	l	1948	2138	2361	2499
Max System Operating Pressure		Barg	10	10	10	10
Flow Rate		l/s	24.8	26.9	29.0	31.1
Pressure Drop		kPa	68.8	73.5	75.6	81.5

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

## Technical Data

## TCF23X12S-24, TCF23X14S-24, TCF23X16S-25, TCF23X18S-25

## Electrical

			146	147	148	149
ELECTRICAL DATA			TCF23X12S-24	TCF23X14S-24	TCF23X16S-25	TCF23X18S-25
Unit Data						
Full Load Amps	(1)	A	435	440	445	450
Maximum Start Amps		A	300	305	310	315
Mains Supply		VAC	400V (±10%) 3PH 50Hz			
Recommended Mains Fuse Size		A	450	500	500	500
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)			
Independent Permanent Supply Recommended Fuse Size		A	25	25	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)			
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG			
Control Circuit		VAC	24 VAC & 230VAC (±10%)			
Evaporator						
Immersion Heater Rating		W	500 (2x 250)	500 (2x 250)	500 (2x 250)	500 (2x 250)
External Trace Heating						
Available (fitted by others)		W	500	500	500	500
Condenser Fan - Per Fan (AC)						
Quantity			12	14	16	18
Full Load Amps		A	2.5	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3	1.3
Condenser Fan - Per Fan (EC)						
Quantity			12	14	16	18
Full Load Amps		A	3.9	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)						
Quantity			N/A	N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A	N/A
Compressor - Per Compressor						
Nominal Run Amps		A	135	135	135	135
Quantity			2	2	2	2
Motor Rating		kW	87	87	87	87
Start Amps		A	2	2	2	2
Type Of Start			Electronic Soft Start			

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Technical Data

TCF23X18L-28, TCF23X20L-28, TCF23X22L-28, TCF23X24L-28

Mechanical

Technical FreeCool

			150	151	152	153
Mechanical Data	Notes	Units	TCF23X18L-28	TCF23X20L-28	TCF23X22L-28	TCF23X24L-28
Cooling Duty - AC Fans	(1)	kW	840	900	960	1020
Nom Input -Cooling Only		kW	261	269	278	289
EER	(2)		3.21	3.35	3.45	3.53
ESEER	(3)		4.60	4.65	4.67	4.73
SEER	(3)		4.45	4.50	4.52	4.59
Nominal Output - Free Cooling	(4)	kW	694	763	831	900
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-0.9	-0.5	-0.2	0.1
Cooling Duty - EC Fans	(1)	kW	840	900	960	1020
Nom Input -Cooling Only		kW	253	260	268	278
EER	(2)		3.32	3.46	3.58	3.67
ESEER	(3)		5.12	5.25	5.31	5.40
SEER	(3)		4.91	5.05	5.11	5.19
Nominal Output - Free Cooling	(4)	kW	694	763	831	900
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-0.9	-0.5	-0.2	0.1
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Capacity Steps	(6)	%	10-100%	10-100%	10-100%	10-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 10550	2800 x 2200 x 11682	2800 x 2200 x 12814	2800 x 2200 x 13946
Machine Weight	(7)	kg	12670	13670	14530	15490
Operating Weight	(7)	kg	14580	15870	16860	17980
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)			
Evaporator - Type			Flooded - Shell and Tube Evaporator			
Insulation			Class O, UV stable Insulation			
Total Max. Water Flow		l/s	108.5	108.5	108.5	108.5
Total Min. Water Flow		l/s	36.2	36.2	36.2	36.2
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins			
Face Area Total		m²	42.6	47.4	52.1	56.8
Maximum Airflow - AC Fans		m³/s	70.0	77.7	85.5	93.3
Maximum Airflow - EC Fans		m³/s	70.0	77.7	85.5	93.3
Maximum Airflow - High Airflow EC Fans		m³/s	N/A	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan			
Quantity			18	20	22	24
Diameter		mm	800	800	800	800
Maximum Speed - AC Fans		rpm	710	710	710	710
Maximum Speed - EC Fans		rpm	715	715	715	715
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor			
Quantity			3	3	3	3
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation			
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a			
Charge (Total) CCT1 + CCT2		kg	445 + 225	460 + 230	470 + 230	475 + 245
Refrigeration Control			Electronic Expansion Valve (EEV)			
Water System			Grooved Type Coupling and Pipe Assembly			
Water Inlet / Outlet			DN200	DN200	DN200	DN200
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2	0.5
Water Volume		l	1919	2204	2332	2500
Minimum System Water Volume	(8)	l	3233	3611	3833	4094
Max System Operating Pressure		Barg	10	10	10	10
Flow Rate		l/s	35.3	37.8	40.4	42.9
Pressure Drop		kPa	62.7	67.0	71.6	76.8

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale



Technical Data

TCF23X18L-28, TCF23X20L-28, TCF23X22L-28, TCF23X24L-28

Electrical

		150	151	152	153
ELECTRICAL DATA		TCF23X18L-28	TCF23X20L-28	TCF23X22L-28	TCF23X24L-28
Unit Data					
Full Load Amps	(1) A	675	680	685	900
Maximum Start Amps	A	465	470	475	690
Mains Supply	VAC	400V (±10%) 3PH 50Hz			
Recommended Mains Fuse Size	A	710	710	710	1000
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)	mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)			
Independent Permanent Supply Recommended Fuse Size	A	25	25	25	25
Independent Permanent Supply	VAC	230V 1PH 50Hz (±10%)			
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)	mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG			
Control Circuit	VAC	24 VAC & 230VAC (±10%)			
Evaporator					
Immersion Heater Rating	W	500 (2x 250)	500 (2x 250)	500 (2x 250)	500 (2x 250)
External Trace Heating					
Available (fitted by others)	W	500	500	500	500
Condenser Fan - Per Fan (AC)					
Quantity		18	20	22	24
Full Load Amps	A	2.5	2.5	2.5	2.5
Locked Rotor Amps	A	8.8	8.8	8.8	8.8
Motor Rating	kW	1.3	1.3	1.3	1.3
Condenser Fan - Per Fan (EC)					
Quantity		18	20	22	24
Full Load Amps	A	3.9	3.9	3.9	3.9
Locked Rotor Amps	A	N/A	N/A	N/A	N/A
Motor Rating	kW	2.56	2.56	2.56	2.56
Condenser Fan - Per Fan (EC High Air Volume)					
Quantity					
Full Load Amps	A	N/A	N/A	N/A	N/A
Locked Rotor Amps	A	N/A	N/A	N/A	N/A
Motor Rating	kW	N/A	N/A	N/A	N/A
Compressor - Per Compressor					
Nominal Run Amps	A	210	210	210	210
Quantity		2	2	2	2
Motor Rating	kW	129	129	129	129
Start Amps	A	2	2	2	2
Type Of Start		Electronic Soft Start			

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.

Technical Data

TCF24X16S-26, TCF24X18S-26, TCF24X20S-26

Mechanical

Technical FreeCool

			154	155	156
Mechanical Data	Notes	Units	TCF24X16S-26	TCF24X18S-26	TCF24X20S-26
Cooling Duty - AC Fans	(1)	kW	790	820	860
Nom Input -Cooling Only		kW	241	239	243
EER	(2)		3.28	3.43	3.54
ESEER	(3)		4.77	4.79	4.81
SEER	(3)		4.60	4.63	4.66
Nominal Output - Free Cooling	(4)	kW	627	689	752
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-1.6	-0.7	-0.0
Cooling Duty - EC Fans	(1)	kW	790	820	860
Nom Input -Cooling Only		kW	234	231	234
EER	(2)		3.38	3.55	3.67
ESEER	(3)		5.29	5.50	5.59
SEER	(3)		5.07	5.27	5.37
Nominal Output - Free Cooling	(4)	kW	627	689	752
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	-1.6	-0.7	-0.0
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A
Capacity Steps	(6)	%	7.5-100%	7.5-100%	7.5-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 9418	2800 x 2200 x 10550	2800 x 2200 x 11682
Machine Weight	(7)	kg	12020	12940	13930
Operating Weight	(7)	kg	13800	14890	16090
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)		
Evaporator - Type			Flooded - Shell and Tube Evaporator		
Insulation			Class O, UV stable Insulation		
Total Max. Water Flow		l/s	99.7	99.7	99.7
Total Min. Water Flow		l/s	33.2	33.2	33.2
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins		
Face Area Total		m²	37.9	42.6	47.4
Maximum Airflow - AC Fans		m³/s	62.2	70.0	77.7
Maximum Airflow - EC Fans		m³/s	62.2	70.0	77.7
Maximum Airflow - High Airflow EC Fans		m³/s	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan		
Quantity			16	18	20
Diameter		mm	800	800	800
Maximum Speed - AC Fans		rpm	710	710	710
Maximum Speed - EC Fans		rpm	715	715	715
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A
Compressor - Type			Turbocor - Oil Free Compressor		
Quantity			4	4	4
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation		
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged				R134a	
Charge (Total) CCT1 + CCT2		kg	350 + 345	360 + 350	365 + 365
Refrigeration Control			Electronic Expansion Valve (EEV)		
Water System			Grooved Type Coupling and Pipe Assembly		
Water Inlet / Outlet			DN200	DN200	DN200
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2
Water Volume		l	1785	1954	2160
Minimum System Water Volume	(8)	l	2649	2851	3101
Max System Operating Pressure		Barg	10	10	10
Flow Rate		l/s	33.2	34.5	36.2
Pressure Drop		kPa	62.8	62.5	64.3

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCF24X16S-26, TCF24X18S-26, TCF24X20S-26

Electrical

			154	155	156
ELECTRICAL DATA			TCF24X16S-26	TCF24X18S-26	TCF24X20S-26
<b>Unit Data</b>					
Full Load Amps	(1)	A	580	585	590
Maximum Start Amps		A	445	450	455
Mains Supply		VAC	400V (±10%) 3PH 50Hz		
Recommended Mains Fuse Size		A	630	630	630
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)		
Independent Permanent Supply Recommended Fuse Size		A	25		25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)		
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG		
Control Circuit		VAC	24 VAC & 230VAC (±10%)		
<b>Evaporator</b>					
Immersion Heater Rating		W	500 (2x 250)		
<b>External Trace Heating</b>					
Available (fitted by others)		W	500		
<b>Condenser Fan - Per Fan (AC)</b>					
Quantity			16	18	20
Full Load Amps		A	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3
<b>Condenser Fan - Per Fan (EC)</b>					
Quantity			16	18	20
Full Load Amps		A	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>					
Quantity			N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A
<b>Compressor - Per Compressor</b>					
Nominal Run Amps		A	135	135	135
Quantity			2	2	2
Motor Rating		kW	87	87	87
Start Amps		A	2	2	2
Type Of Start			Electronic Soft Start		

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Technical Data

TCF24X22S-27, TCF24X24S-27, TCF24X22L-21, TCF24X24L-21

Mechanical

Technical FreeCool

			157	158	159	160
Mechanical Data	Notes	Units	TCF24X22S-27	TCF24X24S-27	TCF24X22L-21	TCF24X24L-21
Cooling Duty - AC Fans	(1)	kW	910	960	1040	1080
Nom Input -Cooling Only		kW	252	261	336	337
EER	(2)		3.62	3.68	3.10	3.20
ESEER	(3)		4.84	4.86	4.75	4.78
SEER	(3)		4.70	4.72	4.57	4.61
Nominal Output - Free Cooling	(4)	kW	818	883	851	915
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	0.4	0.8	-1.1	-0.5
Cooling Duty - EC Fans	(1)	kW	910	960	1040	1080
Nom Input -Cooling Only		kW	242	250	326	326
EER	(2)		3.77	3.83	3.19	3.31
ESEER	(3)		5.66	5.71	5.29	5.37
SEER	(3)		5.44	5.49	5.06	5.14
Nominal Output - Free Cooling	(4)	kW	818	883	851	915
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	0.4	0.8	-1.1	-0.5
Cooling Duty - High Airflow EC Fans	(1)	kW	N/A	N/A	N/A	N/A
Nom Input -Cooling Only		kW	N/A	N/A	N/A	N/A
EER	(2)		N/A	N/A	N/A	N/A
ESEER	(3)		N/A	N/A	N/A	N/A
SEER	(3)		N/A	N/A	N/A	N/A
Nominal Output - Free Cooling	(4)	kW	N/A	N/A	N/A	N/A
Ambient when Free Cooling = 100% Nominal DX	(5)	°C	N/A	N/A	N/A	N/A
Capacity Steps	(6)	%	7.5-100%	7.5-100%	7.5-100%	7.5-100%
Dimensions (H x W x L)	(9)	mm	2800 x 2200 x 12814	2800 x 2200 x 13946	2800 x 2200 x 12814	2800 x 2200 x 13946
Machine Weight	(7)	kg	14750	15740	14960	15970
Operating Weight	(7)	kg	17040	18280	17260	18520
Construction Material			Base: Plain Galvanised Steel, Panels: Galvanised Sheet Steel, Epoxy Baked Powder Paint, Light Grey (RAL 7035)			
Evaporator - Type			Flooded - Shell and Tube Evaporator			
Insulation			Class O, UV stable Insulation			
Total Max. Water Flow		l/s	104.2	104.2	108.5	108.5
Total Min. Water Flow		l/s	34.6	34.6	36.2	36.2
Condenser - Type			Epoxy Coated Aluminium Microchannel & Aluminium Fins			
Face Area Total		m <sup>2</sup>	52.1	56.8	52.1	56.8
Maximum Airflow - AC Fans		m <sup>3</sup> /s	85.5	93.3	85.5	93.3
Maximum Airflow - EC Fans		m <sup>3</sup> /s	85.5	93.3	85.5	93.3
Maximum Airflow - High Airflow EC Fans		m <sup>3</sup> /s	N/A	N/A	N/A	N/A
Condenser Fan & Motor			Sickle Bladed Axial Fan			
Quantity			22	24	22	24
Diameter		mm	800	800	800	800
Maximum Speed - AC Fans		rpm	710	710	710	710
Maximum Speed - EC Fans		rpm	715	715	715	715
Maximum Speed - High Airflow EC Fans		rpm	N/A	N/A	N/A	N/A
Compressor - Type			TurboCor - Oil Free Compressor			
Quantity			4	4	4	4
Capacity Control			Variable Frequency Drive (VFD) for Linear Capacity Modulation			
Refrigeration			Dual Circuit	Dual Circuit	Dual Circuit	Dual Circuit
Refrigerant Pre-charged			R134a			
Charge (Total) CCT1 + CCT2		kg	360 + 365	375 + 370	365 + 370	380 + 380
Refrigeration Control			Electronic Expansion Valve (EEV)			
Water System			Grooved Type Coupling and Pipe Assembly			
Water Inlet / Outlet			DN200	DN200	DN200	DN200
Water Drain / Bleed - Evap		inch	1/2	1/2	1/2	0.5
Water Volume		l	2298	2544	2309	2554
Minimum System Water Volume	(8)	l	3294	3594	3447	3735
Max System Operating Pressure		Barg	10	10	10	10
Flow Rate		l/s	38.3	40.4	43.7	45.4
Pressure Drop		kPa	66.2	70.3	82.1	84.8

(1) Based on FC units performance at 16/10°C return/supply temperatures, 35°C ambient, 20% ethylene glycol. All performance data is supplied in accordance with BS EN 14511-1:2013  
 (2) EER = DX cooling output / (compressor input power + fan input power)  
 (3) ESEER / SEER based upon unit operating at 12 / 7 °C return / supply temperature, 35°C ambient.  
 (4) Nominal Free Cooling output at 16/10°C return/supply temperatures, 2°C ambient, 20% ethylene glycol.  
 (5) Ambient temperature that maximum nominal DX duty can be achieved using Free Cooling only.  
 (6) This is a nominal figure based on full compressor duty, actual turndown depends on both condensing and evaporating temperatures.  
 (7) Based on standard unit without options, machine weight includes refrigerant charge, operating weight includes refrigerant charge and water volume.  
 For unit weights with waterside options fitted please contact Airedale.  
 (8) For minimum system water volume calculation, refer to Design Features & Information - Minimum System Water Volume Calculations.  
 (9) Height based on standard fan, for optional fan dimensions please contact Airedale

Technical Data

TCF24X22S-27, TCF24X24S-27, TCF24X22L-21, TCF24X24L-21

Electrical

			157	158	159	160
ELECTRICAL DATA			TCF24X22S-27	TCF24X24S-27	TCF24X22L-21	TCF24X24L-21
<b>Unit Data</b>						
Full Load Amps	(1)	A	595	600	895	900
Maximum Start Amps		A	460	465	685	690
Mains Supply		VAC	400V (±10%) 3PH 50Hz			
Recommended Mains Fuse Size		A	630	630	1000	1000
Max Mains Incoming Cable Size (Direct to 3 Phase Mains Isolator)		mm <sup>2</sup>	2x 300mm <sup>2</sup> (Torque >20Nm)			
Independent Permanent Supply Recommended Fuse Size		A	25	25	25	25
Independent Permanent Supply		VAC	230V 1PH 50Hz (±10%)			
Max Permanent Incoming Cable Size (Direct to Control Panel Isolator)		mm <sup>2</sup>	6mm <sup>2</sup> / 8 AWG			
Control Circuit		VAC	24 VAC & 230VAC (±10%)			
<b>Evaporator</b>						
Immersion Heater Rating		W	500 (2x 250)			
<b>External Trace Heating</b>						
Available (fitted by others)		W	500			
<b>Condenser Fan - Per Fan (AC)</b>						
Quantity			22	24	22	24
Full Load Amps		A	2.5	2.5	2.5	2.5
Locked Rotor Amps		A	8.8	8.8	8.8	8.8
Motor Rating		kW	1.3	1.3	1.3	1.3
<b>Condenser Fan - Per Fan (EC)</b>						
Quantity			22	24	22	24
Full Load Amps		A	3.9	3.9	3.9	3.9
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	2.56	2.56	2.56	2.56
<b>Condenser Fan - Per Fan (EC High Air Volume)</b>						
Quantity			N/A	N/A	N/A	N/A
Full Load Amps		A	N/A	N/A	N/A	N/A
Locked Rotor Amps		A	N/A	N/A	N/A	N/A
Motor Rating		kW	N/A	N/A	N/A	N/A
<b>Compressor - Per Compressor</b>						
Nominal Run Amps		A	135	135	210	210
Quantity			2	2	2	2
Motor Rating		kW	87	87	129	129
Start Amps		A	2	2	2	2
Type Of Start			Electronic Soft Start			

(1) Based at full load Conditions and AC Standard Fans

Pump electrical data is available from Airedale upon request.



Sound Data - TCF

TCF - AC Fans

Technical FreeCool

		AC								Overall [dB(A)]
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000	8000 Hz	
TCF11R06S-07	Sound Power	87	86	86	81	80	76	77	81	87
	Sound Pressure @10m	55	54	53	49	48	43	45	49	54
TCF11R08S-07	Sound Power	88	88	87	82	81	76	78	81	87
	Sound Pressure @10m	56	55	54	49	49	44	45	49	55
TCF11R06L-11	Sound Power	87	86	86	82	83	77	76	80	87
	Sound Pressure @10m	55	54	53	49	51	44	44	47	55
TCF11R08L-08	Sound Power	88	88	87	83	84	77	76	80	88
	Sound Pressure @10m	56	55	54	50	51	45	44	47	55
TCF11R10L-10	Sound Power	89	88	88	83	84	78	76	80	88
	Sound Pressure @10m	56	56	55	50	51	45	44	47	55
TCF12R08S-09	Sound Power	88	88	87	83	82	78	80	84	89
	Sound Pressure @10m	56	55	54	50	50	45	48	52	56
TCF12R10S-05	Sound Power	89	89	88	83	83	78	80	84	89
	Sound Pressure @10m	56	56	55	51	50	45	48	51	56
TCF12R12S-05	Sound Power	90	89	89	84	83	79	80	84	90
	Sound Pressure @10m	57	56	56	51	50	46	47	51	56
TCF12R14S-05	Sound Power	91	90	89	85	84	79	80	84	90
	Sound Pressure @10m	57	57	56	51	51	46	47	51	57
TCF12R12L-12	Sound Power	90	89	89	85	86	80	79	83	90
	Sound Pressure @10m	57	56	55	52	53	47	46	50	57
TCF12R14L-12	Sound Power	91	90	89	85	86	80	79	83	90
	Sound Pressure @10m	57	57	56	52	53	47	46	49	57
TCF12R16L-12	Sound Power	91	91	90	86	87	80	79	83	91
	Sound Pressure @10m	58	57	56	52	53	47	46	49	57
TCF12R18L-13	Sound Power	92	91	90	86	87	81	79	83	91
	Sound Pressure @10m	58	57	57	52	53	47	46	49	57
TCF12R20L-13	Sound Power	92	91	91	86	87	81	79	83	91
	Sound Pressure @10m	58	58	57	52	53	47	46	49	57
TCF22R10S-22	Sound Power	89	89	88	83	83	78	80	84	89
	Sound Pressure @10m	56	56	55	51	50	45	48	51	56

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 16/10°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Sound Data - TCF

TCF - AC Fans

		AC								Overall [dB(A)]
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000	8000 Hz	
TCF22R12S-22	Sound Power	90	89	89	84	83	79	80	84	90
	Sound Pressure @10m	57	56	56	51	50	46	47	51	56
TCF22R14S-22	Sound Power	91	90	89	85	84	79	80	84	90
	Sound Pressure @10m	57	57	56	51	51	46	47	51	57
TCF22R12L-23	Sound Power	90	89	89	85	86	80	79	83	90
	Sound Pressure @10m	57	56	55	52	53	47	46	50	57
TCF22R14L-23	Sound Power	91	90	89	85	86	80	79	83	90
	Sound Pressure @10m	57	57	56	52	53	47	46	49	57
TCF22R16L-23	Sound Power	91	91	90	86	87	80	79	83	91
	Sound Pressure @10m	58	57	56	52	53	47	46	49	57
TCF22R18L-23	Sound Power	92	91	90	86	87	81	79	83	91
	Sound Pressure @10m	58	57	57	52	53	47	46	49	57
TCF22R20L-23	Sound Power	92	91	91	86	87	81	79	83	91
	Sound Pressure @10m	58	58	57	52	53	47	46	49	57
TCF23R12S-24	Sound Power	90	89	89	84	84	79	82	86	91
	Sound Pressure @10m	57	56	56	51	51	46	49	53	57
TCF23R14S-24	Sound Power	91	90	89	85	85	80	82	86	91
	Sound Pressure @10m	57	57	56	52	51	46	49	53	58
TCF23R16S-25	Sound Power	91	91	90	85	85	80	82	86	91
	Sound Pressure @10m	58	57	56	52	51	47	49	52	58
TCF23R18S-25	Sound Power	92	91	90	86	85	80	82	86	91
	Sound Pressure @10m	58	57	57	52	51	47	48	52	58
TCF23R18L-28	Sound Power	92	91	90	86	88	82	81	84	92
	Sound Pressure @10m	58	57	57	53	54	48	47	51	58
TCF23R20L-28	Sound Power	92	91	91	87	88	82	81	84	92
	Sound Pressure @10m	58	58	57	53	54	48	47	51	58
TCF23R22L-28	Sound Power	93	92	91	87	88	82	81	84	92
	Sound Pressure @10m	59	58	57	53	54	48	47	50	58
TCF23R24L-28	Sound Power	93	92	92	87	88	82	81	84	93
	Sound Pressure @10m	59	58	57	53	54	48	47	50	58
TCF24R16S-26	Sound Power	91	91	90	86	85	81	83	87	92
	Sound Pressure @10m	58	57	57	52	52	47	50	54	58

FreeCool  
Technical

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 16/10°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

**Sound Data - TCF**

**TCF - AC Fans**

Technical FreeCool

		AC								Overall [dB(A)]
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000	8000 Hz	
<b>TCF24R18S-26</b>	Sound Power	92	91	91	86	86	81	83	87	92
	Sound Pressure @10m	58	57	57	52	52	47	50	54	58
<b>TCF24R20S-26</b>	Sound Power	92	92	91	86	86	81	83	87	92
	Sound Pressure @10m	58	58	57	53	52	47	50	53	58
<b>TCF24R22S-27</b>	Sound Power	93	92	91	87	86	81	83	87	92
	Sound Pressure @10m	59	58	57	53	52	47	49	53	58
<b>TCF24R24S-27</b>	Sound Power	93	92	92	87	86	82	83	87	93
	Sound Pressure @10m	59	58	57	53	52	47	49	53	58
<b>TCF24R22L-21</b>	Sound Power	93	92	91	87	89	83	82	86	93
	Sound Pressure @10m	59	58	57	53	55	49	48	52	59
<b>TCF24R24L-21</b>	Sound Power	93	92	92	88	89	83	82	86	93
	Sound Pressure @10m	59	58	57	53	55	49	48	51	59
<b>TCF11X06S-07</b>	Sound Power	82	83	82	77	77	73	77	81	85
	Sound Pressure @10m	50	51	49	45	45	41	45	49	52
<b>TCF11X08S-07</b>	Sound Power	83	84	83	78	77	74	77	81	85
	Sound Pressure @10m	51	52	50	45	45	41	45	49	52
<b>TCF11X06L-11</b>	Sound Power	82	83	81	79	82	75	76	80	86
	Sound Pressure @10m	50	51	49	46	49	43	44	47	53

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 16/10°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.



Sound Data - TCF

TCF - AC Fans

		AC								Overall [dB(A)]
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000	8000 Hz	
TCF11X08L-08	Sound Power	83	84	82	79	82	75	76	80	86
	Sound Pressure @10m	51	52	50	47	49	43	43	47	53
TCF11X10L-10	Sound Power	84	85	83	80	82	76	76	80	86
	Sound Pressure @10m	51	52	50	47	49	43	43	47	53
TCF12X08S-09	Sound Power	83	84	83	79	80	76	80	84	87
	Sound Pressure @10m	51	52	50	47	47	43	48	52	55
TCF12X10S-05	Sound Power	84	85	84	80	80	76	80	84	88
	Sound Pressure @10m	51	52	51	47	47	43	47	51	55
TCF12X12S-05	Sound Power	85	86	85	80	80	76	80	84	88
	Sound Pressure @10m	52	53	51	47	47	43	47	51	55
TCF12X14S-05	Sound Power	86	87	85	81	80	76	80	84	88
	Sound Pressure @10m	52	53	52	47	47	43	47	51	55
TCF12X12L-12	Sound Power	85	86	84	82	85	78	79	83	89
	Sound Pressure @10m	52	53	51	49	52	45	46	50	56
TCF12X14L-12	Sound Power	86	87	85	82	85	78	79	83	89
	Sound Pressure @10m	52	53	51	49	51	45	46	49	55
TCF12X16L-12	Sound Power	86	87	85	82	85	78	79	83	89
	Sound Pressure @10m	53	54	52	49	51	45	45	49	55
TCF12X18L-13	Sound Power	87	88	86	82	85	79	79	83	89
	Sound Pressure @10m	53	54	52	49	51	45	45	49	55
TCF12X20L-13	Sound Power	87	88	86	83	85	79	79	83	89
	Sound Pressure @10m	53	54	52	49	51	45	45	49	55
TCF22X10S-22	Sound Power	84	85	84	80	80	76	80	84	88
	Sound Pressure @10m	51	52	51	47	47	43	47	51	55
TCF22X12S-22	Sound Power	85	86	85	80	80	76	80	84	88
	Sound Pressure @10m	52	53	51	47	47	43	47	51	55
TCF22X14S-22	Sound Power	86	87	85	81	80	76	80	84	88
	Sound Pressure @10m	52	53	52	47	47	43	47	51	55
TCF22X12L-23	Sound Power	85	86	84	82	85	78	79	83	89
	Sound Pressure @10m	52	53	51	49	52	45	46	50	56
TCF22X14L-23	Sound Power	86	87	85	82	85	78	79	83	89
	Sound Pressure @10m	52	53	51	49	51	45	46	49	55

FreeCool  
Technical

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 16/10°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Sound Data - TCF

TCF - AC Fans

Technical FreeCool

		AC								Overall [dB(A)]
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000	8000 Hz	
TCF22X16L-23	Sound Power	86	87	85	82	85	78	79	83	89
	Sound Pressure @10m	53	54	52	49	51	45	45	49	55
TCF22X18L-23	Sound Power	87	88	86	82	85	79	79	83	89
	Sound Pressure @10m	53	54	52	49	51	45	45	49	55
TCF22X20L-23	Sound Power	87	88	86	83	85	79	79	83	89
	Sound Pressure @10m	53	54	52	49	51	45	45	49	55
TCF23X12S-24	Sound Power	85	86	85	81	81	78	82	86	89
	Sound Pressure @10m	52	53	52	48	48	45	49	53	56
TCF23X14S-24	Sound Power	86	87	85	81	81	78	82	86	89
	Sound Pressure @10m	52	53	52	48	48	44	49	53	56
TCF23X16S-25	Sound Power	86	87	86	82	82	78	82	86	89
	Sound Pressure @10m	53	54	52	48	48	44	48	52	56
TCF23X18S-25	Sound Power	87	88	86	82	82	78	82	86	90
	Sound Pressure @10m	53	54	53	48	48	44	48	52	56
TCF23X18L-28	Sound Power	87	88	86	83	86	80	81	84	90
	Sound Pressure @10m	53	54	52	50	53	46	47	51	57
TCF23X20L-28	Sound Power	87	88	86	84	86	80	81	84	91
	Sound Pressure @10m	53	54	52	50	53	46	47	50	57
TCF23X22L-28	Sound Power	88	89	87	84	87	80	81	84	91
	Sound Pressure @10m	54	55	53	50	52	46	47	50	57
TCF23X24L-28	Sound Power	88	89	87	84	87	80	81	84	91
	Sound Pressure @10m	54	55	53	50	52	46	47	50	56
TCF24X16S-26	Sound Power	86	87	86	82	83	79	83	87	90
	Sound Pressure @10m	53	54	53	49	49	45	50	54	57
TCF24X18S-26	Sound Power	87	88	86	83	83	79	83	87	91
	Sound Pressure @10m	53	54	53	49	49	45	50	54	57
TCF24X20S-26	Sound Power	87	88	87	83	83	79	83	87	91
	Sound Pressure @10m	53	54	53	49	49	45	49	53	57
TCF24X22S-27	Sound Power	88	89	87	83	83	79	83	87	91
	Sound Pressure @10m	54	55	53	49	49	45	49	53	57
TCF24X24S-27	Sound Power	88	89	88	83	83	79	83	87	91
	Sound Pressure @10m	54	55	53	49	49	45	49	53	57
TCF24X22L-21	Sound Power	88	89	87	85	88	81	82	86	92
	Sound Pressure @10m	54	55	53	50	54	47	48	52	58
TCF24X24L-21	Sound Power	88	89	87	85	88	81	82	86	92
	Sound Pressure @10m	54	55	53	50	53	47	48	51	57

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 16/10°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Sound Data - TCF

TCF - EC Fans

		EC								
		Single Octave Sound Levels (dB)								Overall [dB(A)]
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCF11R06S-07	Sound Power	86	84	84	80	81	75	77	81	86
	Sound Pressure @10m	53	52	52	48	48	43	45	49	54
TCF11R08S-07	Sound Power	82	82	82	78	79	74	77	81	85
	Sound Pressure @10m	50	49	49	46	46	41	45	49	53
TCF11R06L-11	Sound Power	92	89	87	84	85	80	77	80	89
	Sound Pressure @10m	60	57	55	51	53	48	44	47	57
TCF11R08L-08	Sound Power	91	88	87	83	85	79	77	80	89
	Sound Pressure @10m	58	56	54	51	53	46	44	47	56
TCF11R10L-10	Sound Power	87	86	86	82	84	77	76	80	88
	Sound Pressure @10m	55	53	53	49	51	44	43	47	55
TCF12R08S-09	Sound Power	92	89	88	84	85	80	81	84	90
	Sound Pressure @10m	59	57	56	52	52	48	48	52	58
TCF12R10S-05	Sound Power	89	87	87	83	84	78	80	84	89
	Sound Pressure @10m	56	54	54	50	51	45	48	51	56
TCF12R12S-05	Sound Power	87	86	86	82	83	77	80	84	89
	Sound Pressure @10m	54	53	53	49	50	44	47	51	56
TCF12R14S-05	Sound Power	86	85	85	81	82	77	80	84	88
	Sound Pressure @10m	52	52	52	48	49	44	47	51	55
TCF12R12L-12	Sound Power	93	91	89	86	88	82	80	83	91
	Sound Pressure @10m	60	58	56	53	55	49	47	50	58
TCF12R14L-12	Sound Power	93	90	89	86	88	81	80	83	91
	Sound Pressure @10m	59	57	56	52	54	48	46	49	58
TCF12R16L-12	Sound Power	91	90	89	85	87	81	79	83	91
	Sound Pressure @10m	58	56	55	52	54	47	46	49	57
TCF12R18L-13	Sound Power	91	90	89	85	87	81	79	83	91
	Sound Pressure @10m	58	56	55	52	54	47	46	49	57
TCF12R20L-13	Sound Power	91	89	89	85	87	80	79	83	91
	Sound Pressure @10m	57	55	55	51	53	46	45	49	57
TCF22R10S-22	Sound Power	89	87	87	83	84	78	80	84	89
	Sound Pressure @10m	56	54	54	50	51	45	48	51	56
TCF22R12S-22	Sound Power	87	86	86	82	83	77	80	84	89
	Sound Pressure @10m	54	53	53	49	50	44	47	51	56

FreeCool  
Technical

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 16/10°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Sound Data - TCF

TCF - EC Fans

Technical FreeCool

		EC								
		Single Octave Sound Levels (dB)								Overall [dB(A)]
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCF22R14S-22	Sound Power	86	85	85	81	82	77	80	84	88
	Sound Pressure @10m	52	52	52	48	49	44	47	51	55
TCF22R12L-23	Sound Power	93	91	89	86	88	82	80	83	91
	Sound Pressure @10m	60	57	56	53	55	49	47	50	58
TCF22R14L-23	Sound Power	93	90	89	86	88	81	80	83	91
	Sound Pressure @10m	59	57	56	52	54	48	46	49	58
TCF22R16L-23	Sound Power	91	90	89	85	87	81	79	83	91
	Sound Pressure @10m	58	56	55	52	54	47	46	49	57
TCF22R18L-23	Sound Power	91	90	89	85	87	81	79	83	91
	Sound Pressure @10m	57	56	55	52	54	47	46	49	57
TCF22R20L-23	Sound Power	90	89	89	85	87	80	79	83	91
	Sound Pressure @10m	57	55	55	51	53	46	45	49	57
TCF23R12S-24	Sound Power	91	89	89	85	86	80	82	86	91
	Sound Pressure @10m	58	56	56	52	53	47	49	53	58
TCF23R14S-24	Sound Power	90	89	88	84	85	80	82	86	91
	Sound Pressure @10m	57	55	55	51	52	46	49	53	58
TCF23R16S-25	Sound Power	89	88	88	84	85	79	82	86	91
	Sound Pressure @10m	56	55	54	50	51	46	49	52	57
TCF23R18S-25	Sound Power	88	88	87	84	84	79	82	86	90
	Sound Pressure @10m	55	54	54	50	51	45	48	52	57
TCF23R18L-28	Sound Power	93	91	90	87	89	82	81	84	92
	Sound Pressure @10m	59	57	56	53	55	49	47	51	59
TCF23R20L-28	Sound Power	92	91	90	86	89	82	81	84	92
	Sound Pressure @10m	58	57	56	53	55	48	47	51	58
TCF23R22L-28	Sound Power	92	90	90	86	89	82	81	84	92
	Sound Pressure @10m	58	56	55	52	54	48	47	50	58
TCF23R24L-28	Sound Power	91	90	89	86	88	82	81	84	92
	Sound Pressure @10m	57	56	55	52	54	47	47	50	58
TCF24R16S-26	Sound Power	92	90	90	86	87	81	83	87	92
	Sound Pressure @10m	59	57	56	52	53	48	50	54	59

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 16/10°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Sound Data - TCF

TCF - EC Fans

		EC								
		Single Octave Sound Levels (dB)								Overall [dB(A)]
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCF24R18S-26	Sound Power	91	90	89	85	86	81	83	87	92
	Sound Pressure @10m	57	56	55	52	52	47	50	54	58
TCF24R20S-26	Sound Power	90	89	89	85	86	80	83	87	92
	Sound Pressure @10m	56	55	55	51	52	47	49	53	58
TCF24R22S-27	Sound Power	90	89	88	85	85	80	83	87	92
	Sound Pressure @10m	55	55	54	51	51	46	49	53	57
TCF24R24S-27	Sound Power	89	88	88	84	85	80	83	87	91
	Sound Pressure @10m	55	54	54	50	51	46	49	53	57
TCF24R22L-21	Sound Power	94	92	91	88	90	84	82	86	94
	Sound Pressure @10m	60	58	57	54	56	50	48	52	60
TCF24R24L-21	Sound Power	94	92	91	88	90	83	82	86	94
	Sound Pressure @10m	59	58	57	53	56	49	48	51	59
TCF11X06S-07	Sound Power	84	83	80	77	78	73	77	81	85
	Sound Pressure @10m	51	50	48	45	45	41	45	49	52
TCF11X08S-07	Sound Power	84	83	81	78	78	73	77	81	85
	Sound Pressure @10m	52	51	48	45	45	41	45	49	52
TCF11X06L-11	Sound Power	84	83	79	79	82	75	76	80	86
	Sound Pressure @10m	51	50	47	46	49	43	44	47	53
TCF11X08L-08	Sound Power	85	84	81	79	82	75	76	80	86
	Sound Pressure @10m	52	51	48	47	49	43	43	47	53
TCF11X10L-10	Sound Power	86	85	82	80	82	75	76	80	86
	Sound Pressure @10m	53	52	49	47	49	42	43	47	53
TCF12X08S-09	Sound Power	85	84	82	80	80	76	80	84	87
	Sound Pressure @10m	52	51	49	47	47	43	48	52	55

FreeCool  
Technical

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 16/10°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Sound Data - TCF

TCF - EC Fans

Technical FreeCool

		EC								Overall [dB(A)]
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCF12X10S-05	Sound Power	86	85	82	80	80	76	80	84	88
	Sound Pressure @10m	53	52	50	47	47	43	47	51	55
TCF12X12S-05	Sound Power	87	86	83	80	81	76	80	84	88
	Sound Pressure @10m	53	53	50	47	47	43	47	51	55
TCF12X14S-05	Sound Power	87	86	84	81	81	76	80	84	88
	Sound Pressure @10m	54	53	50	48	47	43	47	51	55
TCF12X12L-12	Sound Power	87	86	82	82	85	78	79	83	89
	Sound Pressure @10m	53	53	49	49	52	45	46	50	56
TCF12X14L-12	Sound Power	87	86	83	82	85	78	79	83	89
	Sound Pressure @10m	54	53	50	49	52	45	46	49	55
TCF12X16L-12	Sound Power	88	87	84	82	85	78	79	83	89
	Sound Pressure @10m	54	53	50	49	52	45	45	49	55
TCF12X18L-13	Sound Power	88	87	84	83	85	78	79	83	89
	Sound Pressure @10m	55	54	50	49	51	45	45	49	55
TCF12X20L-13	Sound Power	89	88	85	83	85	78	79	83	89
	Sound Pressure @10m	55	54	51	49	51	44	45	49	55
TCF22X10S-22	Sound Power	86	85	82	80	80	76	80	84	88
	Sound Pressure @10m	53	52	50	47	47	43	47	51	55
TCF22X12S-22	Sound Power	87	86	83	80	81	76	80	84	88
	Sound Pressure @10m	53	53	50	47	47	43	47	51	55
TCF22X14S-22	Sound Power	87	86	84	81	81	76	80	84	88
	Sound Pressure @10m	54	53	50	48	47	43	47	51	55
TCF22X12L-23	Sound Power	87	86	82	82	85	78	79	83	89
	Sound Pressure @10m	53	53	49	49	52	45	46	50	56
TCF22X14L-23	Sound Power	87	86	83	82	85	78	79	83	89
	Sound Pressure @10m	54	53	50	49	52	45	46	49	55
TCF22X16L-23	Sound Power	88	87	84	82	85	78	79	83	89
	Sound Pressure @10m	54	53	50	49	52	45	45	49	55
TCF22X18L-23	Sound Power	88	87	84	83	85	78	79	83	89
	Sound Pressure @10m	55	54	50	49	51	45	45	49	55
TCF22X20L-23	Sound Power	89	88	85	83	85	78	79	83	89
	Sound Pressure @10m	55	54	51	49	51	44	45	49	55

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 16/10°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Sound Data - TCF

TCF - EC Fans

		EC								
		Single Octave Sound Levels (dB)								Overall [dB(A)]
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCF23X12S-24	Sound Power	87	86	83	81	82	78	82	86	89
	Sound Pressure @10m	53	53	50	48	49	44	49	53	56
TCF23X14S-24	Sound Power	87	86	84	82	82	78	82	86	89
	Sound Pressure @10m	54	53	51	48	49	44	49	53	56
TCF23X16S-25	Sound Power	88	87	84	82	82	78	82	86	89
	Sound Pressure @10m	54	53	51	48	49	44	48	52	56
TCF23X18S-25	Sound Power	88	87	85	82	82	78	82	86	90
	Sound Pressure @10m	55	54	51	48	49	44	48	52	56
TCF23X18L-28	Sound Power	88	87	84	84	87	80	81	84	90
	Sound Pressure @10m	55	54	50	50	53	46	47	51	57
TCF23X20L-28	Sound Power	89	88	85	84	87	80	81	84	91
	Sound Pressure @10m	55	54	51	50	53	46	47	50	57
TCF23X22L-28	Sound Power	89	88	85	84	87	80	81	84	91
	Sound Pressure @10m	55	54	51	50	53	46	47	50	57
TCF23X24L-28	Sound Power	90	89	85	84	87	80	81	84	91
	Sound Pressure @10m	55	54	51	50	53	46	46	50	56
TCF24X16S-26	Sound Power	88	87	85	83	83	79	83	87	90
	Sound Pressure @10m	54	53	51	49	49	45	50	54	57
TCF24X18S-26	Sound Power	88	87	85	83	83	79	83	87	91
	Sound Pressure @10m	55	54	51	49	49	45	49	54	57
TCF24X20S-26	Sound Power	89	88	85	83	83	79	83	87	91
	Sound Pressure @10m	55	54	52	49	49	45	49	53	57
TCF24X22S-27	Sound Power	89	88	86	83	83	79	83	87	91
	Sound Pressure @10m	55	54	52	49	49	45	49	53	57
TCF24X24S-27	Sound Power	90	89	86	83	84	79	83	87	91
	Sound Pressure @10m	55	54	52	49	49	45	49	53	57
TCF24X22L-21	Sound Power	89	88	85	85	88	81	82	86	92
	Sound Pressure @10m	55	54	51	51	54	47	48	52	58
TCF24X24L-21	Sound Power	90	89	85	85	88	81	82	86	92
	Sound Pressure @10m	55	54	51	51	54	47	48	51	57

FreeCool  
Technical

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 16/10°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Sound Data - TCF

TCF - High Airflow EC Fans

Technical FreeCool

		HAEC								Overall [dB(A)]
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCF11R06S-07	Sound Power	94	92	90	82	81	77	78	81	88
	Sound Pressure @10m	62	59	58	50	49	44	45	49	56
TCF11R08S-07	Sound Power	91	88	87	80	79	75	77	81	86
	Sound Pressure @10m	58	56	55	47	47	42	45	49	54
TCF11R06L-11	Sound Power	99	98	94	88	87	84	79	80	92
	Sound Pressure @10m	66	65	61	55	54	52	46	47	60
TCF11R08L-08	Sound Power	98	96	93	86	86	81	78	80	91
	Sound Pressure @10m	65	63	61	54	53	48	45	47	58
TCF11R10L-10	Sound Power	96	94	92	84	85	79	77	80	90
	Sound Pressure @10m	63	61	59	51	52	46	44	47	57
TCF12R08S-09	Sound Power	99	97	94	87	86	82	81	84	92
	Sound Pressure @10m	66	64	61	55	53	50	49	52	60
TCF12R10S-05	Sound Power	97	95	93	85	84	80	81	84	91
	Sound Pressure @10m	64	62	60	52	51	47	48	51	58
TCF12R12S-05	Sound Power	96	93	92	84	83	79	81	84	90
	Sound Pressure @10m	63	60	59	51	50	46	47	51	57
TCF12R14S-05	Sound Power	94	92	91	83	83	78	80	84	90
	Sound Pressure @10m	61	59	57	50	49	45	47	51	56
TCF12R12L-12	Sound Power	100	98	95	89	88	84	81	83	94
	Sound Pressure @10m	67	65	62	56	55	51	48	50	60
TCF12R14L-12	Sound Power	100	98	96	89	88	83	81	83	93
	Sound Pressure @10m	67	65	62	55	55	50	47	49	60
TCF12R16L-12	Sound Power	100	97	95	88	88	83	80	83	93
	Sound Pressure @10m	66	64	62	54	54	49	47	49	59
TCF12R18L-13	Sound Power	100	97	95	88	88	82	80	83	93
	Sound Pressure @10m	66	64	61	54	54	49	46	49	59
TCF12R20L-13	Sound Power	99	97	95	88	88	82	80	83	93
	Sound Pressure @10m	65	63	61	54	54	48	46	49	59
TCF22R10S-22	Sound Power	97	95	93	85	84	80	81	84	91
	Sound Pressure @10m	64	62	60	52	51	47	48	51	58

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 16/10°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.



Sound Data - TCF

TCF - High Airflow EC Fans

		HAEC								
		Single Octave Sound Levels (dB)								
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	Overall [dB(A)]
TCF22R12S-22	Sound Power	96	93	92	84	83	79	81	84	90
	Sound Pressure @10m	63	60	59	51	50	46	47	51	57
TCF22R14S-22	Sound Power	94	92	91	83	83	78	80	84	90
	Sound Pressure @10m	61	59	57	50	49	45	47	51	56
TCF22R12L-23	Sound Power	100	98	95	89	88	84	81	83	94
	Sound Pressure @10m	67	65	62	56	55	51	47	50	60
TCF22R14L-23	Sound Power	100	98	96	89	88	83	81	83	93
	Sound Pressure @10m	67	65	62	55	55	50	47	49	60
TCF22R16L-23	Sound Power	100	97	95	88	88	82	80	83	93
	Sound Pressure @10m	66	64	62	54	54	49	47	49	59
TCF22R18L-23	Sound Power	99	97	95	88	88	82	80	83	93
	Sound Pressure @10m	66	63	61	54	54	48	46	49	59
TCF22R20L-23	Sound Power	99	97	95	87	88	82	80	83	93
	Sound Pressure @10m	65	63	61	53	54	48	46	49	59
TCF23R12S-24	Sound Power	99	97	95	87	86	82	83	86	93
	Sound Pressure @10m	66	64	62	54	53	49	50	53	60
TCF23R14S-24	Sound Power	99	96	94	87	86	82	82	86	93
	Sound Pressure @10m	65	63	61	54	52	48	49	53	59
TCF23R16S-25	Sound Power	98	95	94	86	85	81	82	86	92
	Sound Pressure @10m	64	62	60	53	52	47	49	52	59
TCF23R18S-25	Sound Power	97	95	93	86	85	80	82	86	92
	Sound Pressure @10m	63	61	59	52	51	47	49	52	58
TCF23R18L-28	Sound Power	101	99	96	89	89	84	82	84	94
	Sound Pressure @10m	67	65	63	56	56	50	48	51	61
TCF23R20L-28	Sound Power	100	98	96	89	89	84	82	84	94
	Sound Pressure @10m	67	64	62	55	55	50	48	51	60

FreeCool  
Technical

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 16/10°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.

Sound Data - TCF

TCF - High Airflow EC Fans

Technical FreeCool

		HAEC								
		Single Octave Sound Levels (dB)								Overall [dB(A)]
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000	
TCF23R22L-28	Sound Power	100	98	96	89	89	83	82	84	94
	Sound Pressure @10m	66	64	62	54	55	49	48	50	60
TCF23R24L-28	Sound Power	100	97	96	88	89	83	82	84	94
	Sound Pressure @10m	66	63	61	54	55	49	47	50	60
TCF24R16S-26	Sound Power	100	98	96	88	87	83	84	87	94
	Sound Pressure @10m	67	64	62	55	54	50	50	54	60
TCF24R18S-26	Sound Power	99	97	95	88	87	82	84	87	94
	Sound Pressure @10m	66	63	61	54	53	49	50	54	60
TCF24R20S-26	Sound Power	99	96	95	87	86	82	84	87	93
	Sound Pressure @10m	65	62	61	53	52	48	50	53	59
TCF24R22S-27	Sound Power	98	96	94	87	86	82	84	87	93
	Sound Pressure @10m	64	62	60	53	52	47	49	53	59
TCF24R24S-27	Sound Power	98	95	94	86	86	81	83	87	93
	Sound Pressure @10m	64	61	60	52	52	47	49	53	59
TCF24R22L-21	Sound Power	102	100	97	91	91	86	83	86	96
	Sound Pressure @10m	68	66	63	57	56	51	49	52	62
TCF24R24L-21	Sound Power	102	99	97	90	90	85	83	86	95
	Sound Pressure @10m	68	65	63	56	56	51	49	51	61

(1) dB(A) is the overall sound level, measured on the A scale.  
 (2) All sound data measured at nominal conditions: Water in/out 16/10°C at 35°C ambient.  
 (3) Based on standard unit, for units fitted with optional extras, please contact Airedale.





Hydronic Data

TCC Waterside Pressure Drop kPa (100% Water)

	Water flow rate l/s																																	
	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72	74
TCC23X20L-20	-	-	-	-	-	-	-	-	-	-	-	-	16	17	19	21	23	25	27	30	32	35	37	40	43	46	49	52	55	58	61	65	68	72
TCC23X22L-20	-	-	-	-	-	-	-	-	-	-	-	16	17	19	21	23	25	27	30	32	35	37	40	43	46	49	52	55	58	61	65	68	72	
TCC23X24L-20	-	-	-	-	-	-	-	-	-	-	-	16	17	19	21	23	25	27	30	32	35	37	40	43	46	49	52	55	58	61	65	68	72	
TCC24X16S-18	-	-	-	-	-	-	-	-	-	14	16	18	21	23	25	28	30	33	36	39	42	45	48	52	55	59	63	67	71	75	79	83	88	92
TCC24X18S-18	-	-	-	-	-	-	-	-	-	14	16	18	21	23	25	28	30	33	36	39	42	45	48	52	55	59	63	67	71	75	79	83	88	92
TCC24X20S-18	-	-	-	-	-	-	-	-	-	14	16	18	21	23	25	28	30	33	36	39	42	45	48	52	55	59	63	67	71	75	79	83	88	92
TCC24X22S-18	-	-	-	-	-	-	-	-	-	14	16	18	21	23	25	28	30	33	36	39	42	45	48	52	55	59	63	67	71	75	79	83	88	92
TCC24X24S-18	-	-	-	-	-	-	-	-	-	14	16	18	21	23	25	28	30	33	36	39	42	45	48	52	55	59	63	67	71	75	79	83	88	92
TCC24X20L-21	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15	16	18	19	21	23	24	26	28	30	32	34	36	38	40	42	45	47	50
TCC24X22L-21	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15	16	18	19	21	23	24	26	28	30	32	34	36	38	40	42	45	47	50
TCC24X24L-21	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	15	16	18	19	21	23	24	26	28	30	32	34	36	38	40	42	45	47	50

Hydraulic  
Technical



Hydronic Data

TCF Waterside Pressure Drop kPa (20% Ethylene Glycol)



	Water flow rate l/s																																					
	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72	74				
TCF11X06L-11	-	51	67	86	107	130	155	182	211	242	276	311	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-				
TCF11X08L-08	-	-	-	-	65	79	94	110	128	148	168	190	214	238	264	291	320	350	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
TCF11X10L-10	-	-	-	55	68	84	100	118	138	159	181	205	231	258	286	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-				
TCF12X08S-09	-	-	-	-	75	89	105	122	140	159	179	201	224	248	274	300	328	357	387	419	452	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
TCF12X10S-05	-	-	-	-	72	86	101	117	135	153	173	194	216	239	263	289	316	344	373	403	435	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
TCF12X12S-05	-	-	-	-	67	80	94	110	126	144	162	182	203	225	248	272	298	324	352	381	411	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
TCF12X14S-05	-	-	-	-	64	77	91	105	121	138	157	176	196	218	240	264	289	314	341	369	398	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
TCF12X12L-12	-	-	-	-	66	76	86	96	108	120	132	145	159	174	189	204	220	237	255	273	291	311	331	351	371	394	416	439	-	-	-	-	-	-	-			
TCF12X14L-12	-	-	-	-	61	70	80	90	100	111	123	136	149	162	176	191	206	222	238	255	273	291	310	329	349	370	391	412	-	-	-	-	-	-	-	-		
TCF12X16L-12	-	-	-	-	58	66	75	85	95	106	117	129	141	154	167	181	196	211	227	243	260	277	296	314	333	353	373	393	-	-	-	-	-	-	-	-		
TCF12X18L-13	-	-	-	-	62	70	79	89	99	110	121	132	145	157	171	184	199	214	229	245	262	279	296	314	333	352	372	392	413	-	-	-	-	-	-	-	-	
TCF12X20L-13	-	-	-	-	60	68	77	86	96	106	117	129	141	153	166	180	194	208	223	239	255	272	289	307	325	344	363	383	403	-	-	-	-	-	-	-	-	
TCF22X10S-22	-	-	-	-	72	85	100	115	132	150	169	189	211	233	256	281	307	333	361	390	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
TCF22X12S-22	-	-	-	-	67	80	94	108	124	141	160	179	199	220	242	266	290	316	342	370	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
TCF22X14S-22	-	-	-	-	64	77	90	105	120	137	154	173	193	213	235	258	282	307	333	360	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
TCF22X12L-23	-	-	-	-	72	82	92	102	113	125	137	150	164	178	192	207	223	239	256	274	292	310	329	349	369	390	411	433	456	-	-	-	-	-	-	-	-	
TCF22X14L-23	-	-	-	-	67	76	85	95	105	116	128	140	153	166	179	194	208	224	239	256	273	290	308	326	345	365	385	406	427	-	-	-	-	-	-	-	-	
TCF22X16L-23	-	-	-	-	63	71	80	89	99	110	121	132	144	157	170	183	197	212	227	243	259	275	292	310	328	347	366	386	406	-	-	-	-	-	-	-	-	
TCF22X18L-23	-	-	-	-	60	68	77	86	96	106	116	127	139	151	164	177	190	204	219	234	250	266	282	299	317	335	354	373	392	-	-	-	-	-	-	-	-	
TCF22X20L-23	-	-	-	-	58	66	74	83	92	102	112	123	135	146	159	171	184	198	212	227	242	258	274	291	308	325	343	362	381	-	-	-	-	-	-	-	-	
TCF23X12S-24	-	-	-	-	66	75	85	95	106	118	130	143	156	170	185	200	215	231	248	266	284	302	321	341	361	382	404	426	-	-	-	-	-	-	-	-	-	
TCF23X14S-24	-	-	-	-	61	70	79	89	99	110	121	133	146	159	172	187	201	216	232	249	266	283	301	320	339	358	379	399	-	-	-	-	-	-	-	-	-	
TCF23X16S-25	-	-	-	-	63	71	80	89	99	110	121	132	144	157	170	183	197	212	227	243	259	275	292	310	328	347	366	385	406	-	-	-	-	-	-	-	-	
TCF23X18S-25	-	-	-	-	60	68	76	85	95	105	115	126	138	150	162	175	189	203	217	232	248	264	280	297	315	332	351	370	389	-	-	-	-	-	-	-	-	
TCF23X18L-28	-	-	-	-	-	-	-	-	-	71	77	84	91	98	106	114	122	131	140	149	158	168	178	188	198	209	220	231	-	-	-	-	-	-	-	-	-	
TCF23X20L-28	-	-	-	-	-	-	-	-	-	67	73	80	86	93	101	108	116	124	133	141	150	159	169	179	189	199	210	220	-	-	-	-	-	-	-	-	-	
TCF23X22L-28	-	-	-	-	-	-	-	-	-	64	70	76	82	89	96	104	111	119	127	135	144	153	162	171	181	191	201	211	-	-	-	-	-	-	-	-	-	
TCF23X24L-28	-	-	-	-	-	-	-	-	-	61	67	73	80	86	93	100	107	115	123	131	139	148	157	166	175	185	195	205	-	-	-	-	-	-	-	-	-	
TCF24X16S-26	-	-	-	-	-	-	-	-	-	65	72	78	86	93	101	109	118	126	135	145	154	164	175	185	196	207	219	231	243	255	-	-	-	-	-	-	-	
TCF24X18S-26	-	-	-	-	-	-	-	-	-	61	67	73	80	87	94	102	110	118	127	136	145	154	164	174	184	195	206	217	228	240	-	-	-	-	-	-	-	-
TCF24X20S-26	-	-	-	-	-	-	-	-	-	57	63	69	76	83	90	97	104	112	120	129	138	147	156	165	175	185	196	206	217	228	-	-	-	-	-	-	-	-
TCF24X22S-27	-	-	-	-	-	-	-	-	-	59	65	71	77	84	91	98	105	113	121	129	137	146	155	164	174	184	194	204	214	-	-	-	-	-	-	-	-	-
TCF24X24S-27	-	-	-	-	-	-	-	-	-	57	63	68	75	81	88	95	102	109	117	125	133	142	150	159	169	178	188	198	208	-	-	-	-	-	-	-	-	-
TCF24X22L-21	-	-	-	-	-	-	-	-	-	64	69	76	82	89	96	103	110	118	126	134	142	151	160	169	179	188	198	209	-	-	-	-	-	-	-	-	-	
TCF24X24L-21	-	-	-	-	-	-	-	-	-	61	67	73	79	86	92	99	107	114	122	130	138	146	155	164	173	183	192	202	-	-	-	-	-	-	-	-	-	



Hydronic Data

Evaporator Pressure Drop - 100% Water



Technical Hydraulic

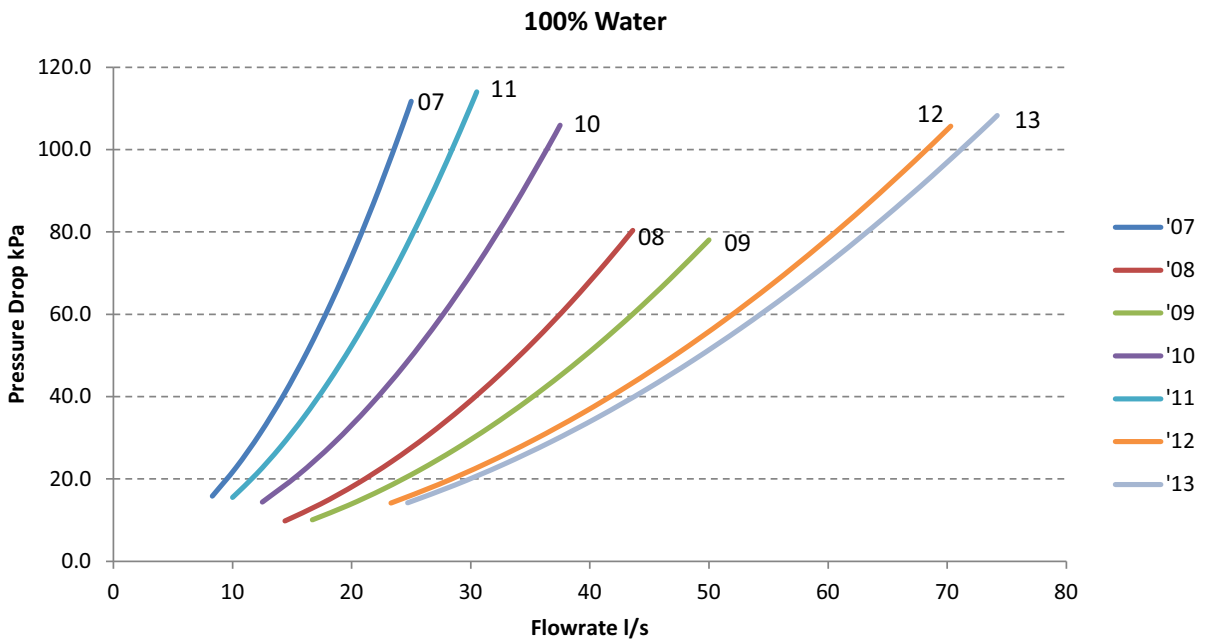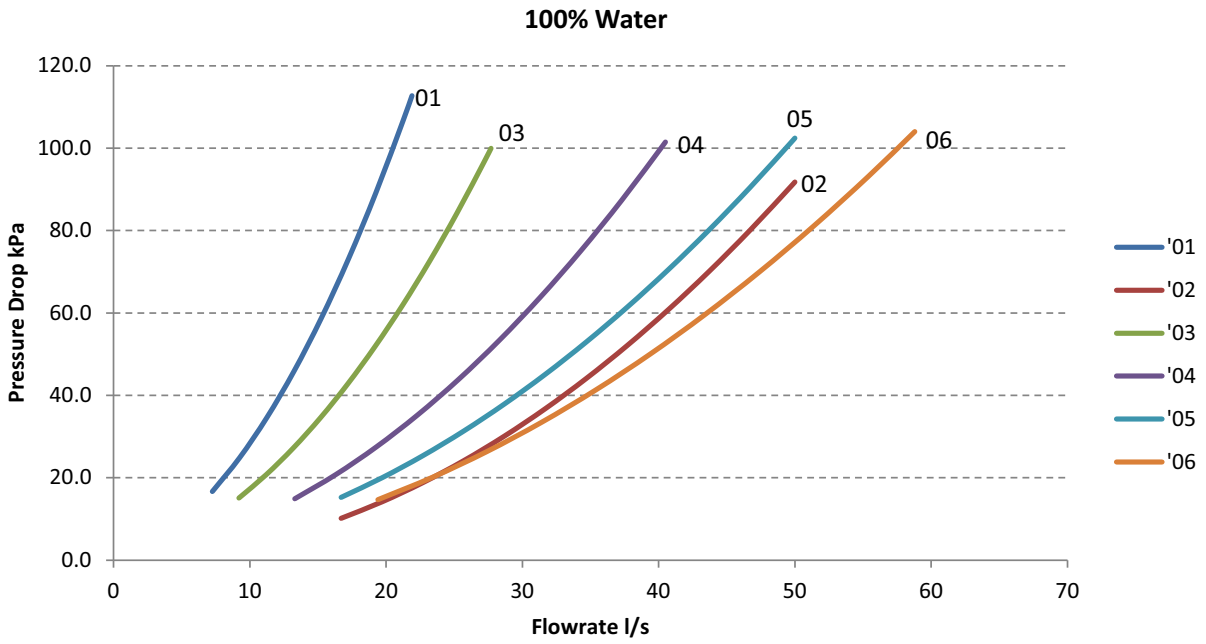



Hydronic Data


Evaporator Pressure Drop - 20% Ethylene Glycol

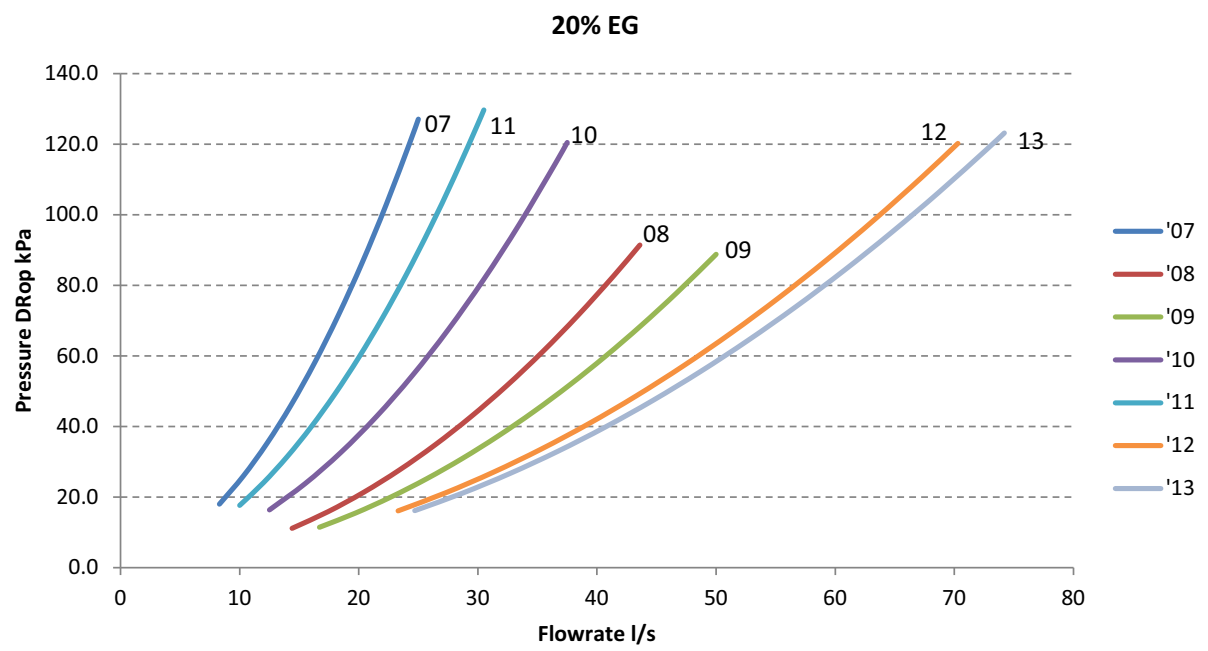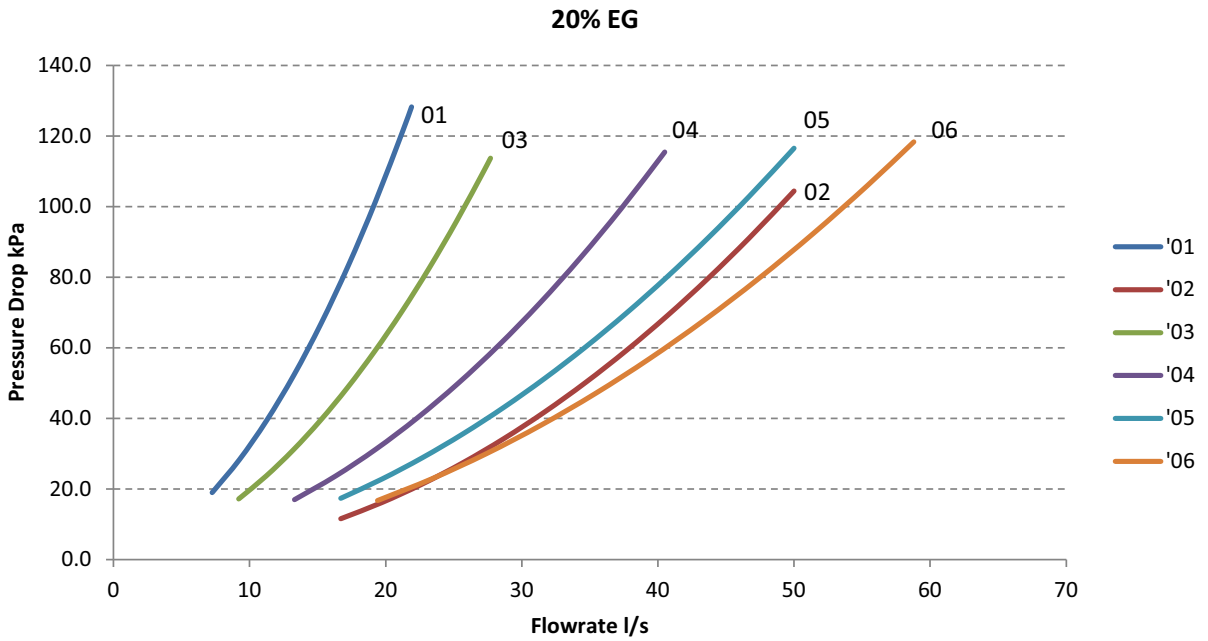


Hydraulic  
Technical

Hydronic Data

Strainer Pressure Drop - 100% Water

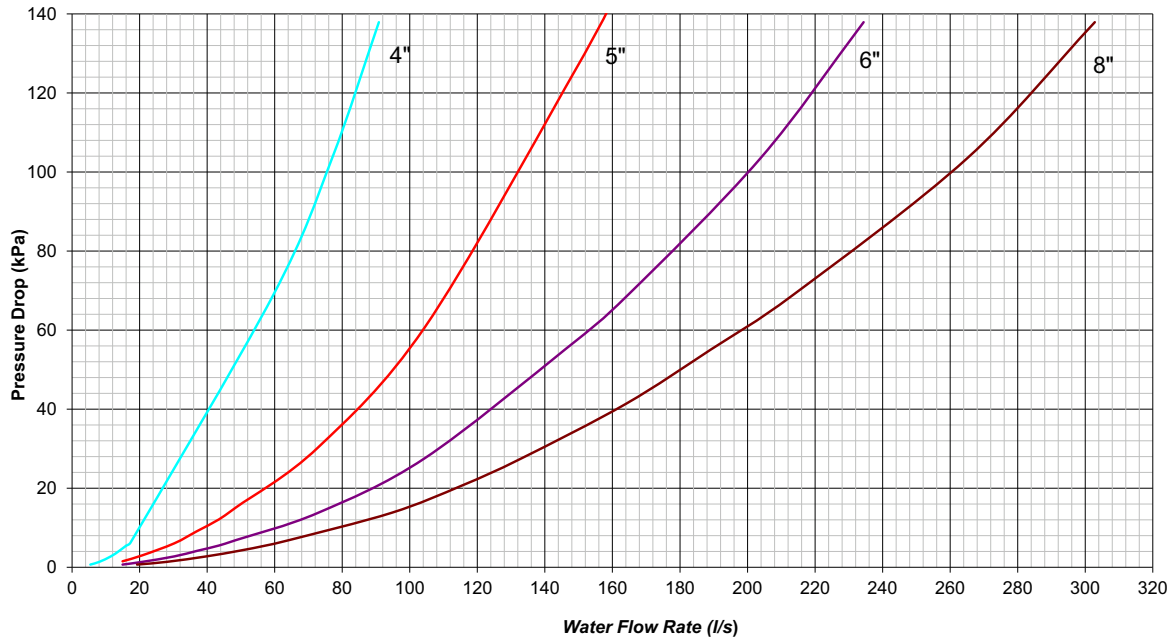


Strainer Pressure Drop - 20% Ethylene Glycol

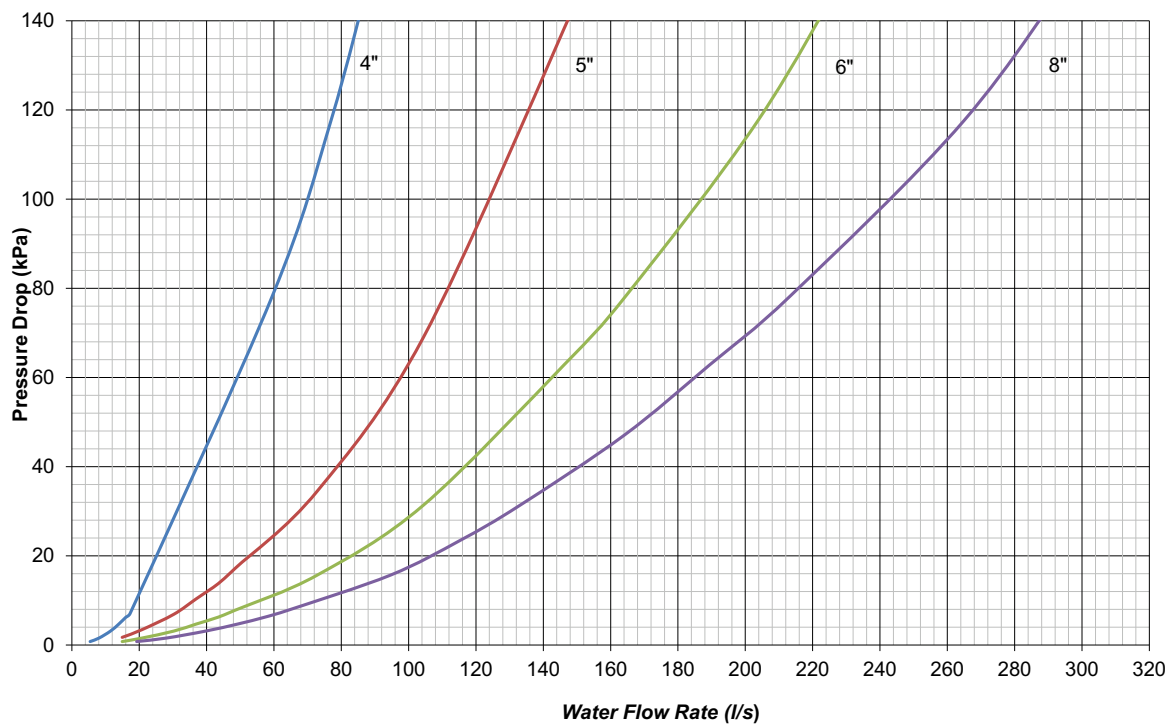

Technical Hydraulic

Installation Data

Air Cooled Masses & Centre of Gravity (C of G)

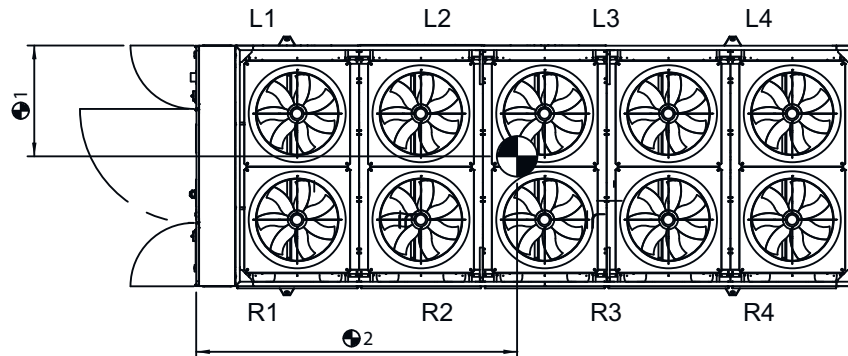

Machine (kg)	Standard Unit C of G's			
	Operating (kg)	C of G 1	C of G 2	
TCC11R04S-01	2730	2840	1350	1140
TCC11R06S-01	3345	3465	1760	1140
TCC11R08S-01	3935	4055	2280	1130
TCC11R06L-02	3510	3650	1760	1130
TCC11R08L-03	4325	4465	2340	1120
TCC11R10L-03	4940	5080	2740	1120
TCC12R08S-04	4720	4880	2360	1160
TCC12R10S-04	5335	5500	2750	1150
TCC12R12S-04	5950	6115	3140	1150
TCC12R14S-04	6560	6735	3640	1140
TCC12R10L-05	5430	5625	2750	1150
TCC12R12L-06	6510	6760	3140	1140
TCC12R14L-06	7120	7365	3600	1130
TCC12R16L-06	7755	8010	4310	1130
TCC12R18L-06	8355	8610	4930	1130
TCC12R20L-06	8975	9235	5540	1130
TCC22R08S-14	4770	4910	2350	1150
TCC22R10S-14	5390	5530	2710	1150
TCC22R12S-14	6020	6160	3090	1140
TCC22R14S-14	6640	6780	3800	1140
TCC22R10L-15	5910	6120	2710	1140
TCC22R12L-15	6540	6750	3070	1130
TCC22R14L-15	7180	7390	3770	1130
TCC22R16L-16	7790	8010	4280	1130
TCC22R18L-16	8400	8620	4800	1130
TCC22R20L-16	9010	9230	5510	1130
TCC23R12S-17	6940	7170	3240	1150
TCC23R14S-17	7560	7790	3890	1150
TCC23R16S-17	8190	8420	4260	1150
TCC23R18S-17	8820	9050	4940	1140
TCC23R16L-19	8920	9200	4240	1140
TCC23R18L-19	9550	9830	4960	1140
TCC23R20L-20	10200	10490	5480	1130
TCC23R22L-20	10810	11100	6320	1130
TCC23R24L-20	11460	11750	6710	1130
TCC24R16S-18	8580	8830	4370	1170
TCC24R18S-18	9210	9460	4860	1160
TCC24R20S-18	9860	10110	5540	1160
TCC24R22S-18	10480	10730	6360	1160
TCC24R24S-18	11110	11360	6620	1150
TCC24R20L-21	10720	11040	5550	1150
TCC24R22L-21	11360	11680	6380	1150
TCC24R24L-21	11990	12310	6630	1150


Centre of gravity is always measured from the control panel end.



Above refers to standard configurations, contact Airedale for other options.

Installation Data

Air Cooled Masses & Centre of Gravity (C of G)

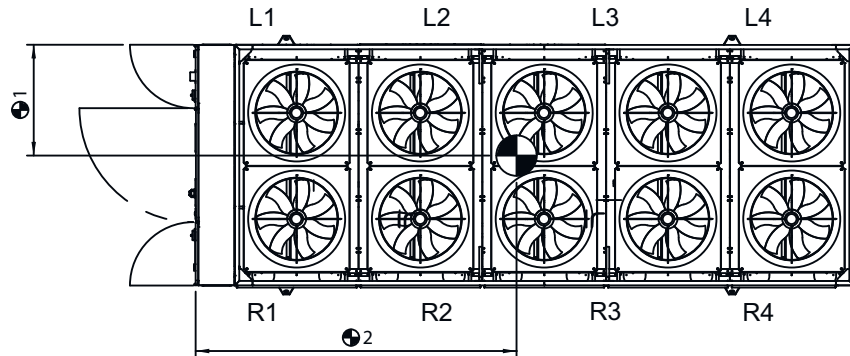

Machine (kg)	Standard Unit C of G's			
	Operating (kg)	C of G 1	C of G 2	
TCC11X04S-01	2730	2840	1350	1140
TCC11X06S-01	3345	3465	1760	1140
TCC11X08S-01	3935	4055	2280	1130
TCC11X06L-02	3510	3650	1760	1130
TCC11X08L-03	4325	4465	2340	1120
TCC11X10L-03	4940	5080	2740	1120
TCC12X08S-04	4720	4880	2360	1160
TCC12X10S-04	5335	5500	2750	1150
TCC12X12S-04	5950	6115	3140	1150
TCC12X14S-04	6560	6735	3640	1140
TCC12X10L-05	5430	5625	2750	1150
TCC12X12L-06	6510	6760	3140	1140
TCC12X14L-06	7120	7365	3600	1130
TCC12X16L-06	7755	8010	4310	1130
TCC12X18L-06	8355	8610	4930	1130
TCC12X20L-06	8975	9235	5540	1130
TCC22X08S-14	4770	4910	2350	1150
TCC22X10S-14	5390	5530	2710	1150
TCC22X12S-14	6020	6160	3090	1140
TCC22X14S-14	6640	6780	3800	1140
TCC22X10L-15	5910	6120	2710	1140
TCC22X12L-15	6540	6750	3070	1130
TCC22X14L-15	7180	7390	3770	1130
TCC22X16L-16	7790	8010	4280	1130
TCC22X18L-16	8400	8620	4800	1130
TCC22X20L-16	9010	9230	5510	1130
TCC23X12S-17	6940	7170	3240	1150
TCC23X14S-17	7560	7790	3890	1150
TCC23X16S-17	8190	8420	4260	1150
TCC23X18S-17	8820	9050	4940	1140
TCC23X16L-19	8920	9200	4240	1140
TCC23X18L-19	9550	9830	4960	1140
TCC23X20L-20	10200	10490	5480	1130
TCC23X22L-20	10810	11100	6320	1130
TCC23X24L-20	11460	11750	6710	1130
TCC24X16S-18	8580	8830	4370	1170
TCC24X18S-18	9210	9460	4860	1160
TCC24X20S-18	9860	10110	5540	1160
TCC24X22S-18	10480	10730	6360	1160
TCC24X24S-18	11110	11360	6620	1150
TCC24X20L-21	10720	11040	5550	1150
TCC24X22L-21	11360	11680	6380	1150
TCC24X24L-21	11990	12310	6630	1150


Centre of gravity is always measured from the control panel end.

Installation

Above refers to standard configurations, contact Airedale for other options.

Installation Data

Freecool Masses & Centre of Gravity (C of G)

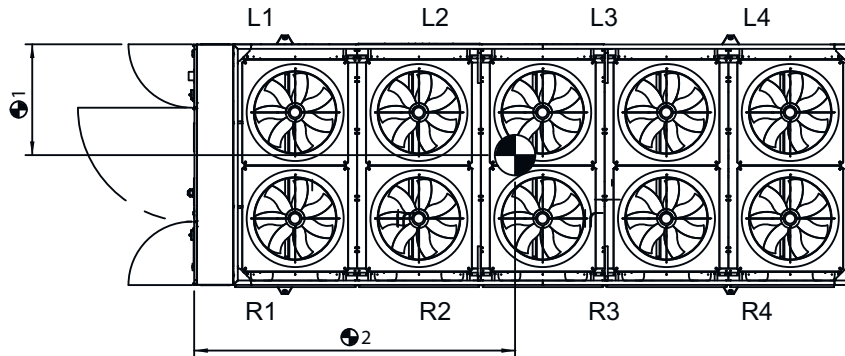

Machine (kg)	Standard Unit C of G's			
	Operating (kg)	C of G 1	C of G 2	
TCF11R06S-07	4075	4535	1850	1170
TCF11R08S-07	4885	5445	2350	1110
TCF11R06L-11	4505	5055	1840	1090
TCF11R08L-08	5130	5760	2390	1090
TCF11R10L-10	6190	6915	2820	1090
TCF12R08S-09	5510	5950	2390	1130
TCF12R10S-05	6585	7335	2830	1120
TCF12R12S-05	7465	8335	3240	1120
TCF12R14S-05	8325	9335	3910	1110
TCF12R12L-12	8215	9285	3240	1120
TCF12R14L-12	9075	10295	3890	1100
TCF12R16L-12	9960	11295	4570	1100
TCF12R18L-13	10745	12210	5260	1090
TCF12R20L-13	11630	13210	5920	1090
TCF22R10S-22	6690	7420	2820	1090
TCF22R12S-22	7570	8400	3230	1090
TCF22R14S-22	8490	9460	3970	1080
TCF22R12L-23	8480	9500	3230	1070
TCF22R14L-23	9440	10640	3960	1060
TCF22R16L-23	10270	11550	4470	1050
TCF22R18L-23	11170	12570	5010	1050
TCF22R20L-23	12040	13520	5710	1040
TCF23R12S-24	8810	9830	3380	1080
TCF23R14S-24	9710	10840	4050	1070
TCF23R16S-25	10610	11890	4450	1070
TCF23R18S-25	11430	12770	5100	1070
TCF23R18L-28	12670	14580	5170	1040
TCF23R20L-28	13670	15870	5740	1030
TCF23R22L-28	14530	16860	6570	1030
TCF23R24L-28	15490	17980	6960	1020
TCF24R16S-26	12020	13800	4610	1060
TCF24R18S-26	12940	14890	5090	1060
TCF24R20S-26	13930	16090	5780	1040
TCF24R22S-27	14750	17040	6610	1040
TCF24R24S-27	15740	18280	6880	1030
TCF24R22L-21	14960	17260	6610	1040
TCF24R24L-21	15970	18520	6880	1030
TCF11X06S-07	4075	4535	1850	1170
TCF11X08S-07	4885	5445	2350	1110
TCF11X06L-11	4505	5055	1840	1090
TCF11X08L-08	5130	5760	2390	1090
TCF11X10L-10	6190	6915	2820	1090
TCF12X08S-09	5510	5950	2390	1130


Centre of gravity is always measured from the control panel end.



Above refers to standard configurations, contact Airedale for other options.

Installation Data

Freecool Masses & Centre of Gravity (C of G)

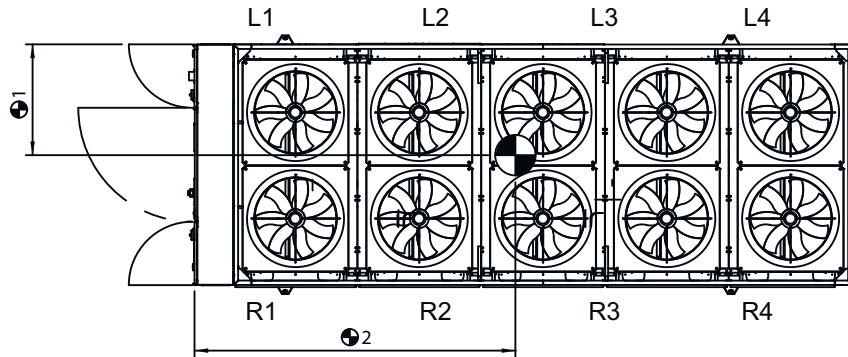

	Standard Unit C of G's			
	Machine (kg)	Operating (kg)	C of G 1	C of G 2
TCF12X10S-05	6585	7335	2830	1120
TCF12X12S-05	7465	8335	3240	1120
TCF12X14S-05	8325	9335	3910	1110
TCF12X12L-12	8215	9285	3240	1120
TCF12X14L-12	9075	10295	3890	1100
TCF12X16L-12	9960	11295	4570	1100
TCF12X18L-13	10745	12210	5260	1090
TCF12X20L-13	11630	13210	5920	1090
TCF22X10S-22	6690	7420	2820	1090
TCF22X12S-22	7570	8400	3230	1090
TCF22X14S-22	8490	9460	3970	1080
TCF22X12L-23	8480	9500	3230	1070
TCF22X14L-23	9440	10640	3960	1060
TCF22X16L-23	10270	11550	4470	1050
TCF22X18L-23	11170	12570	5010	1050
TCF22X20L-23	12040	13520	5710	1040
TCF23X12S-24	8810	9830	3380	1080
TCF23X14S-24	9710	10840	4050	1070
TCF23X16S-25	10610	11890	4450	1070
TCF23X18S-25	11430	12770	5100	1070
TCF23X18L-28	12670	14580	5170	1040
TCF23X20L-28	13670	15870	5740	1030
TCF23X22L-28	14530	16860	6570	1030
TCF23X24L-28	15490	17980	6960	1020
TCF24X16S-26	12020	13800	4610	1060
TCF24X18S-26	12940	14890	5090	1060
TCF24X20S-26	13930	16090	5780	1040
TCF24X22S-27	14750	17040	6610	1040
TCF24X24S-27	15740	18280	6880	1030
TCF24X22L-21	14960	17260	6610	1040
TCF24X24L-21	15970	18520	6880	1030

Centre of gravity is always measured from the control panel end.


Above refers to standard configurations, contact Airedale for other options.

Installation

Installation Data

Point Loadings

Air Cooled

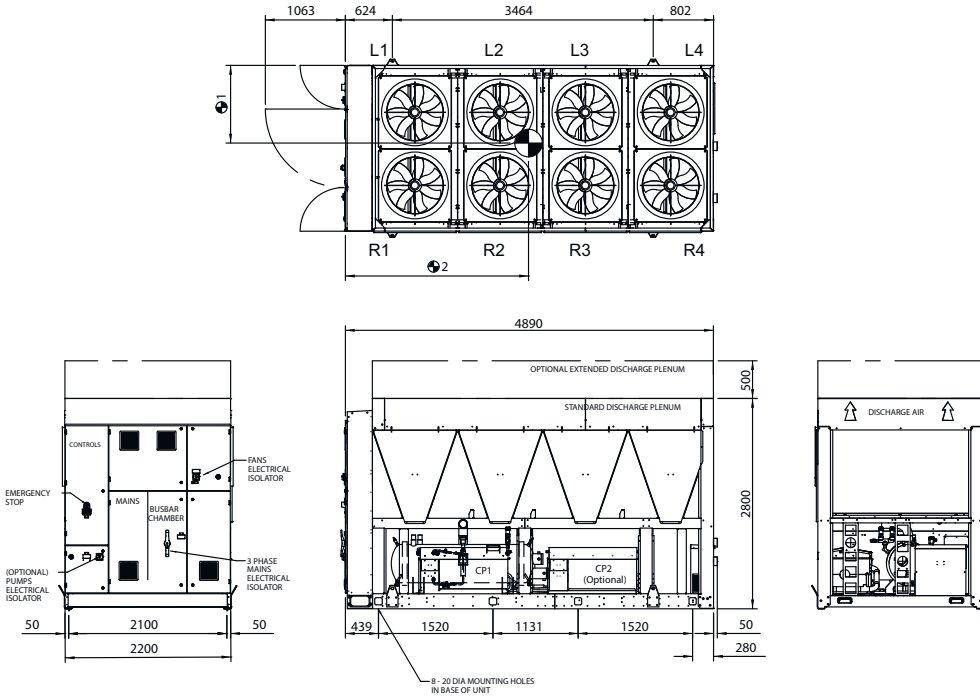

Standard Unit Point Loads																
	L1	L2	L3	L4	L5	L6	L7	L8	R1	R2	R3	R4	R5	R6	R7	R8
	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)
TCC11R04S-01	705	655	-	-	-	-	-	-	755	725	-	-	-	-	-	-
TCC11R06S-01	645	580	450	-	-	-	-	-	685	630	475	-	-	-	-	-
TCC11R08S-01	605	500	450	415	-	-	-	-	640	535	480	430	-	-	-	-
TCC11R06L-02	675	625	470	-	-	-	-	-	710	675	495	-	-	-	-	-
TCC11R08L-03	630	550	535	475	-	-	-	-	660	580	550	485	-	-	-	-
TCC11R10L-03	710	645	595	545	-	-	-	-	745	675	610	555	-	-	-	-
TCC12R08S-04	660	580	570	500	-	-	-	-	715	655	645	555	-	-	-	-
TCC12R10S-04	745	675	625	570	-	-	-	-	810	755	695	625	-	-	-	-
TCC12R12S-04	840	755	695	635	-	-	-	-	905	835	765	685	-	-	-	-
TCC12R14S-04	805	725	660	585	460	-	-	-	890	845	740	565	460	-	-	-
TCC12R10L-05	755	690	640	585	-	-	-	-	825	775	715	640	-	-	-	-
TCC12R12L-06	925	855	785	700	-	-	-	-	985	925	845	740	-	-	-	-
TCC12R14L-06	885	825	745	645	465	-	-	-	965	935	820	615	465	-	-	-
TCC12R16L-06	810	870	835	755	620	-	-	-	840	925	895	815	645	-	-	-
TCC12R18L-06	735	670	800	780	620	580	-	-	770	710	850	835	655	605	-	-
TCC12R20L-06	790	710	845	850	675	630	-	-	825	755	900	900	705	650	-	-


Above refers to standard configurations, contact Airedale for other options.



Installation Data

Point Loadings

Air Cooled

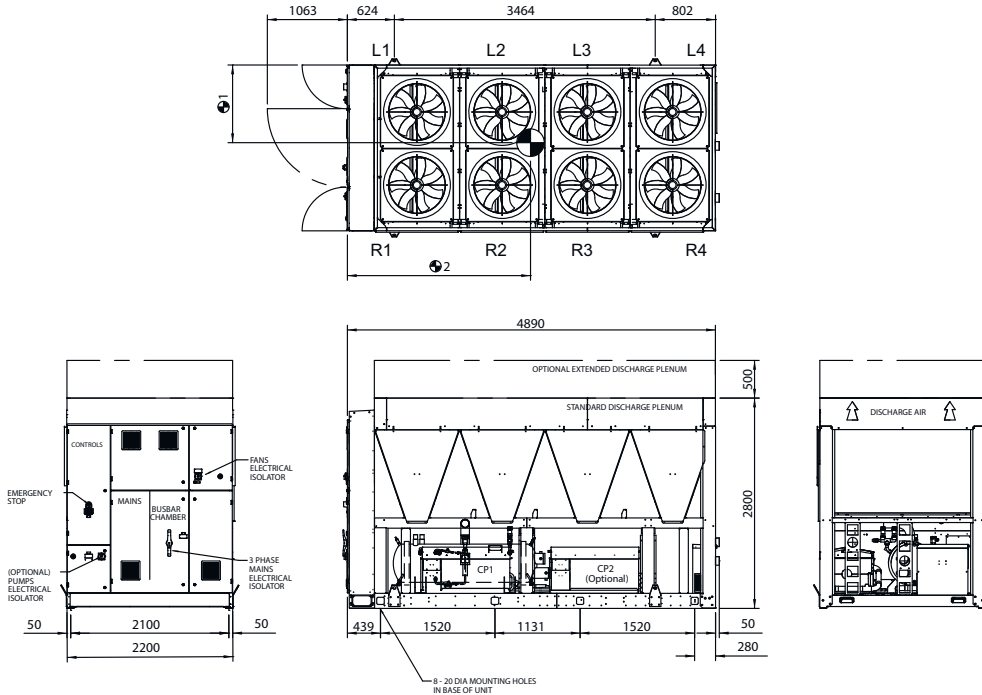

	Standard Unit Point Loads															
	L1 (kg)	L2 (kg)	L3 (kg)	L4 (kg)	L5 (kg)	L6 (kg)	L7 (kg)	L8 (kg)	R1 (kg)	R2 (kg)	R3 (kg)	R4 (kg)	R5 (kg)	R6 (kg)	R7 (kg)	R8 (kg)
TCC22R08S-14	655	605	580	485	-	-	-	-	705	685	655	535	-	-	-	-
TCC22R10S-14	750	710	635	540	-	-	-	-	815	795	705	580	-	-	-	-
TCC22R12S-14	855	790	705	600	-	-	-	-	915	870	780	640	-	-	-	-
TCC22R14S-14	795	715	645	580	530	-	-	-	840	770	705	635	565	-	-	-
TCC22R10L-15	825	810	720	590	-	-	-	-	880	885	785	625	-	-	-	-
TCC22R12L-15	940	895	790	640	-	-	-	-	990	965	855	675	-	-	-	-
TCC22R14L-15	870	800	720	630	560	-	-	-	910	850	775	680	590	-	-	-
TCC22R16L-16	875	840	800	730	650	-	-	-	910	890	855	780	680	-	-	-
TCC22R18L-16	815	760	725	685	630	580	-	-	840	800	765	730	675	610	-	-
TCC22R20L-16	835	770	775	755	710	660	-	-	865	815	815	795	750	685	-	-
TCC23R12S-17	870	900	875	750	-	-	-	-	955	1010	985	820	-	-	-	-
TCC23R14S-17	825	800	770	690	620	-	-	-	905	895	860	760	665	-	-	-
TCC23R16S-17	905	870	830	750	665	-	-	-	980	960	920	825	710	-	-	-
TCC23R18S-17	790	730	740	745	690	635	-	-	855	805	815	815	750	675	-	-
TCC23R16L-19	985	975	930	825	710	-	-	-	1055	1055	1015	895	755	-	-	-
TCC23R18L-19	840	795	825	830	760	690	-	-	900	870	895	895	810	720	-	-
TCC23R20L-20	920	870	895	865	800	725	-	-	985	945	965	925	845	750	-	-
TCC23R22L-20	950	905	945	930	850	795	-	-	1010	975	1015	995	895	830	-	-
TCC23R24L-20	990	935	970	1000	940	865	-	-	1040	1000	1040	1065	995	905	-	-
TCC24R16S-18	890	855	860	810	720	-	-	-	995	985	995	925	795	-	-	-
TCC24R18S-18	835	775	770	750	690	630	-	-	930	890	885	850	770	685	-	-
TCC24R20S-18	870	805	825	810	760	705	-	-	950	915	935	915	850	765	-	-
TCC24R22S-18	910	845	870	875	810	770	-	-	985	945	990	985	905	840	-	-
TCC24R24S-18	980	905	925	920	865	805	-	-	1055	1005	1045	1030	955	870	-	-
TCC24R20L-21	930	890	925	910	840	760	-	-	1005	990	1035	1010	925	820	-	-
TCC24R22L-21	970	925	975	975	895	835	-	-	1035	1020	1085	1080	980	900	-	-
TCC24R24L-21	1040	985	1030	1020	945	865	-	-	1115	1085	1140	1125	1030	925	-	-


Above refers to standard configurations, contact Airedale for other options.



Installation Data

Point Loadings

Air Cooled

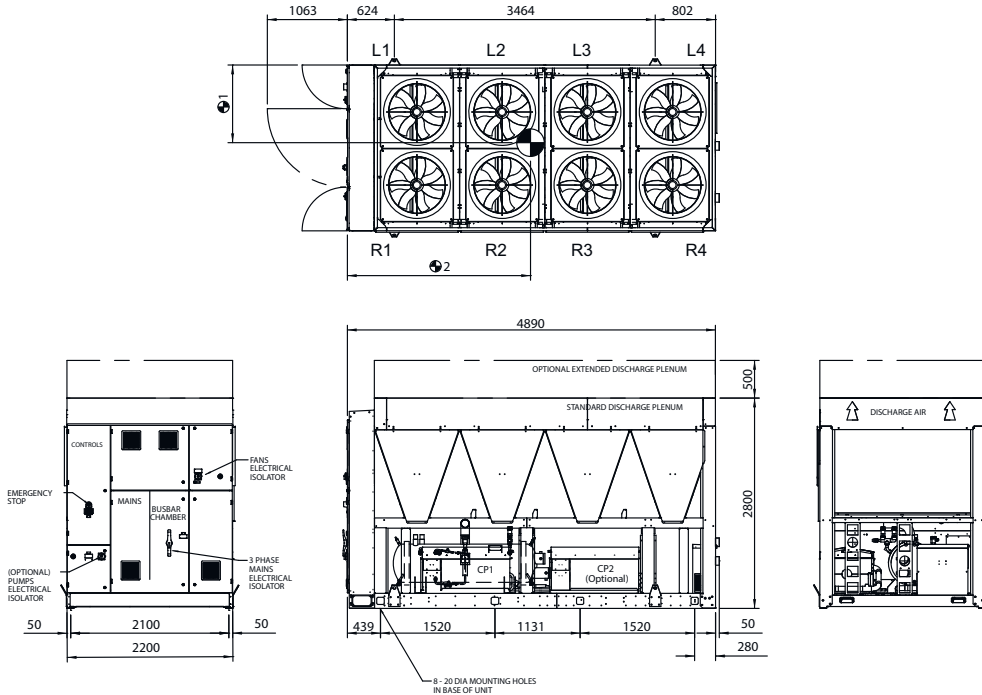

	Standard Unit Point Loads															
	L1 (kg)	L2 (kg)	L3 (kg)	L4 (kg)	L5 (kg)	L6 (kg)	L7 (kg)	L8 (kg)	R1 (kg)	R2 (kg)	R3 (kg)	R4 (kg)	R5 (kg)	R6 (kg)	R7 (kg)	R8 (kg)
TCC11X04S-01	705	655	-	-	-	-	-	-	755	725	-	-	-	-	-	-
TCC11X06S-01	645	580	450	-	-	-	-	-	685	630	475	-	-	-	-	-
TCC11X08S-01	605	500	450	415	-	-	-	-	640	535	480	430	-	-	-	-
TCC11X06L-02	675	625	470	-	-	-	-	-	710	675	495	-	-	-	-	-
TCC11X08L-03	630	550	535	475	-	-	-	-	660	580	550	485	-	-	-	-
TCC11X10L-03	710	645	595	545	-	-	-	-	745	675	610	555	-	-	-	-
TCC12X08S-04	660	580	570	500	-	-	-	-	715	655	645	555	-	-	-	-
TCC12X10S-04	745	675	625	570	-	-	-	-	810	755	695	625	-	-	-	-
TCC12X12S-04	840	755	695	635	-	-	-	-	905	835	765	685	-	-	-	-
TCC12X14S-04	805	725	660	585	460	-	-	-	890	845	740	565	460	-	-	-
TCC12X10L-05	755	690	640	585	-	-	-	-	825	775	715	640	-	-	-	-
TCC12X12L-06	925	855	785	700	-	-	-	-	985	925	845	740	-	-	-	-
TCC12X14L-06	885	825	745	645	465	-	-	-	965	935	820	615	465	-	-	-
TCC12X16L-06	810	870	835	755	620	-	-	-	840	925	895	815	645	-	-	-
TCC12X18L-06	735	670	800	780	620	580	-	-	770	710	850	835	655	605	-	-
TCC12X20L-06	790	710	845	850	675	630	-	-	825	755	900	900	705	650	-	-


Above refers to standard configurations, contact Airedale for other options.



Installation Data

Point Loadings

Air Cooled

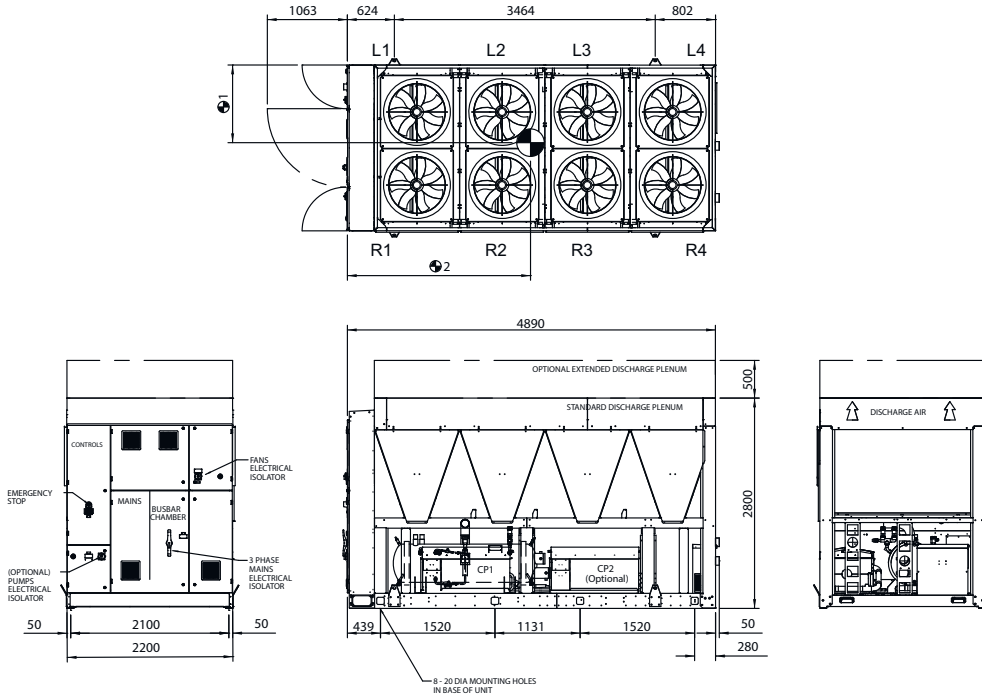


	Standard Unit Point Loads															
	L1 (kg)	L2 (kg)	L3 (kg)	L4 (kg)	L5 (kg)	L6 (kg)	L7 (kg)	L8 (kg)	R1 (kg)	R2 (kg)	R3 (kg)	R4 (kg)	R5 (kg)	R6 (kg)	R7 (kg)	R8 (kg)
TCC22X08S-14	655	605	580	485	-	-	-	-	705	685	655	535	-	-	-	-
TCC22X10S-14	750	710	635	540	-	-	-	-	815	795	705	580	-	-	-	-
TCC22X12S-14	855	790	705	600	-	-	-	-	915	870	780	640	-	-	-	-
TCC22X14S-14	795	715	645	580	530	-	-	-	840	770	705	635	565	-	-	-
TCC22X10L-15	825	810	720	590	-	-	-	-	880	885	785	625	-	-	-	-
TCC22X12L-15	940	895	790	640	-	-	-	-	990	965	855	675	-	-	-	-
TCC22X14L-15	870	800	720	630	560	-	-	-	910	850	775	680	590	-	-	-
TCC22X16L-16	875	840	800	730	650	-	-	-	910	890	855	780	680	-	-	-
TCC22X18L-16	815	760	725	685	630	580	-	-	840	800	765	730	675	610	-	-
TCC22X20L-16	835	770	775	755	710	660	-	-	865	815	815	795	750	685	-	-
TCC23X12S-17	870	900	875	750	-	-	-	-	955	1010	985	820	-	-	-	-
TCC23X14S-17	825	800	770	690	620	-	-	-	905	895	860	760	665	-	-	-
TCC23X16S-17	905	870	830	750	665	-	-	-	980	960	920	825	710	-	-	-
TCC23X18S-17	790	730	740	745	690	635	-	-	855	805	815	815	750	675	-	-
TCC23X16L-19	985	975	930	825	710	-	-	-	1055	1055	1015	895	755	-	-	-
TCC23X18L-19	840	795	825	830	760	690	-	-	900	870	895	895	810	720	-	-
TCC23X20L-20	920	870	895	865	800	725	-	-	985	945	965	925	845	750	-	-
TCC23X22L-20	950	905	945	930	850	795	-	-	1010	975	1015	995	895	830	-	-
TCC23X24L-20	990	935	970	1000	940	865	-	-	1040	1000	1040	1065	995	905	-	-
TCC24X16S-18	890	855	860	810	720	-	-	-	995	985	995	925	795	-	-	-
TCC24X18S-18	835	775	770	750	690	630	-	-	930	890	885	850	770	685	-	-
TCC24X20S-18	870	805	825	810	760	705	-	-	950	915	935	915	850	765	-	-
TCC24X22S-18	910	845	870	875	810	770	-	-	985	945	990	985	905	840	-	-
TCC24X24S-18	980	905	925	920	865	805	-	-	1055	1005	1045	1030	955	870	-	-
TCC24X20L-21	930	890	925	910	840	760	-	-	1005	990	1035	1010	925	820	-	-
TCC24X22L-21	970	925	975	975	895	835	-	-	1035	1020	1085	1080	980	900	-	-
TCC24X24L-21	1040	985	1030	1020	945	865	-	-	1115	1085	1140	1125	1030	925	-	-

Above refers to standard configurations, contact Airedale for other options.

Installation Data

Point Loadings

Freecool

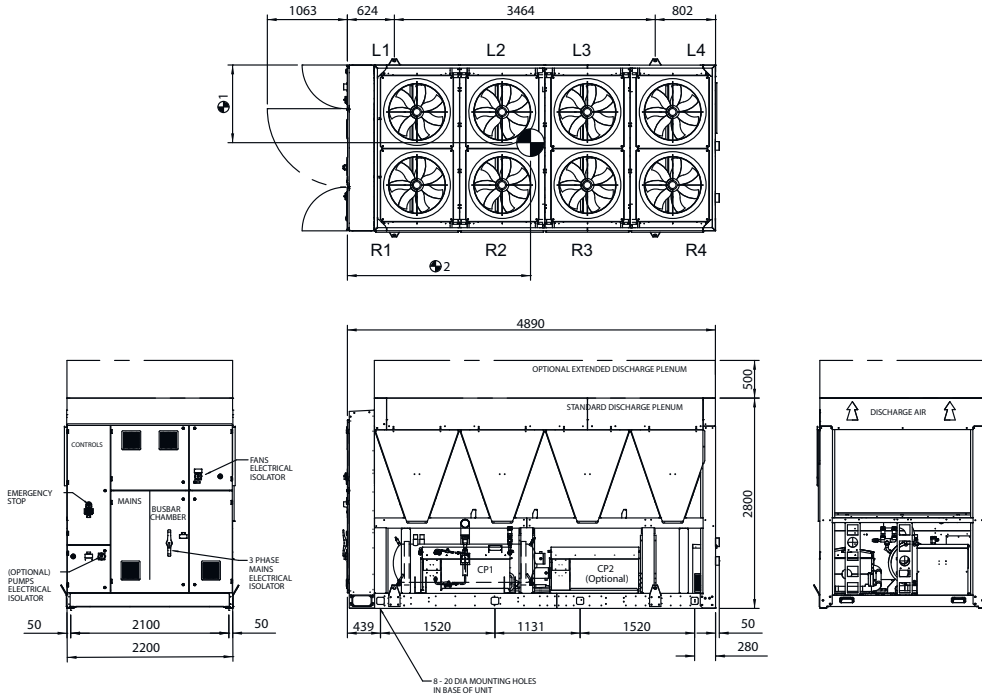

Standard Unit Point Loads																
	L1	L2	L3	L4	L5	L6	L7	L8	R1	R2	R3	R4	R5	R6	R7	R8
	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)
TCF11R06S-07	770	730	615	-	-	-	-	-	840	850	730	-	-	-	-	-
TCF11R08S-07	760	685	660	590	-	-	-	-	785	705	665	595	-	-	-	-
TCF11R06L-11	880	915	745	-	-	-	-	-	890	910	715	-	-	-	-	-
TCF11R08L-08	785	730	720	660	-	-	-	-	795	730	705	635	-	-	-	-
TCF11R10L-10	915	890	870	805	-	-	-	-	925	885	845	780	-	-	-	-
TCF12R08S-09	795	725	715	650	-	-	-	-	835	780	770	680	-	-	-	-
TCF12R10S-05	950	920	905	830	-	-	-	-	990	965	930	845	-	-	-	-
TCF12R12S-05	1085	1045	1020	940	-	-	-	-	1135	1095	1055	960	-	-	-	-
TCF12R14S-05	950	995	985	930	755	-	-	-	1035	1085	1020	860	720	-	-	-
TCF12R12L-12	1195	1180	1155	1045	-	-	-	-	1240	1225	1185	1060	-	-	-	-
TCF12R14L-12	1035	1130	1125	1045	800	-	-	-	1115	1205	1140	950	750	-	-	-
TCF12R16L-12	975	1195	1245	1220	1005	-	-	-	1005	1215	1250	1205	980	-	-	-
TCF12R18L-13	895	825	1135	1225	1170	910	-	-	925	870	1125	1180	1075	875	-	-
TCF12R20L-13	960	885	1205	1345	1280	995	-	-	995	930	1200	1295	1170	950	-	-


Above refers to standard configurations, contact Airedale for other options.



Installation Data

Point Loadings

Freecool

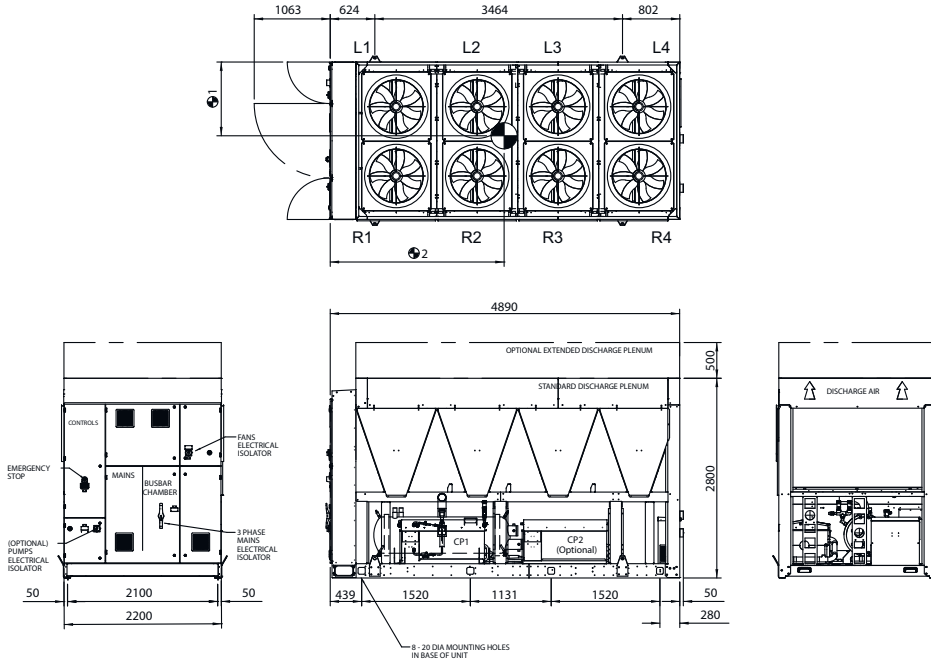


Standard Unit Point Loads																	
	L1 (kg)	L2 (kg)	L3 (kg)	L4 (kg)	L5 (kg)	L6 (kg)	L7 (kg)	L8 (kg)	R1 (kg)	R2 (kg)	R3 (kg)	R4 (kg)	R5 (kg)	R6 (kg)	R7 (kg)	R8 (kg)	
TCF22R10S-22	945	985	985	840	-	-	-	-	970	985	930	780	-	-	-	-	
TCF22R12S-22	1080	1110	1105	945	-	-	-	-	1105	1105	1055	890	-	-	-	-	
TCF22R14S-22	1015	1005	1000	955	850	-	-	-	1020	985	950	885	790	-	-	-	
TCF22R12L-23	1215	1305	1310	1070	-	-	-	-	1210	1245	1185	960	-	-	-	-	
TCF22R14L-23	1140	1175	1180	1100	950	-	-	-	1115	1100	1060	970	845	-	-	-	
TCF22R16L-23	1170	1225	1295	1260	1080	-	-	-	1135	1155	1165	1105	960	-	-	-	
TCF22R18L-23	1090	1105	1145	1165	1100	970	-	-	1050	1040	1040	1030	965	870	-	-	
TCF22R20L-23	1135	1150	1230	1295	1225	1095	-	-	1090	1070	1100	1115	1055	960	-	-	
TCF23R12S-24	1110	1285	1390	1235	-	-	-	-	1145	1265	1290	1110	-	-	-	-	
TCF23R14S-24	1075	1145	1200	1140	1000	-	-	-	1090	1125	1125	1035	905	-	-	-	
TCF23R16S-25	1195	1245	1315	1275	1090	-	-	-	1200	1215	1225	1145	985	-	-	-	
TCF23R18S-25	1045	1055	1130	1200	1140	1015	-	-	1050	1030	1065	1095	1020	920	-	-	
TCF23R18L-28	1145	1205	1335	1435	1370	1200	-	-	1125	1135	1200	1240	1160	1025	-	-	
TCF23R20L-28	1275	1345	1480	1575	1485	1300	-	-	1235	1240	1305	1315	1225	1085	-	-	
TCF23R22L-28	1340	1420	1595	1705	1555	1410	-	-	1280	1295	1385	1410	1280	1180	-	-	
TCF23R24L-28	1410	1490	1665	1825	1745	1540	-	-	1330	1340	1425	1500	1425	1285	-	-	
TCF24R16S-26	1260	1375	1560	1615	1355	-	-	-	1275	1340	1435	1400	1185	-	-	-	
TCF24R18S-26	1195	1255	1355	1425	1350	1175	-	-	1195	1215	1260	1265	1170	1025	-	-	
TCF24R20S-26	1265	1335	1480	1590	1510	1320	-	-	1230	1255	1335	1360	1275	1130	-	-	
TCF24R22S-27	1330	1410	1585	1715	1570	1430	-	-	1280	1300	1410	1455	1330	1225	-	-	
TCF24R24S-27	1455	1530	1705	1830	1710	1505	-	-	1385	1400	1505	1540	1430	1280	-	-	
TCF24R22L-21	1345	1425	1600	1730	1585	1440	-	-	1295	1325	1435	1480	1355	1245	-	-	
TCF24R24L-21	1470	1550	1725	1850	1730	1520	-	-	1405	1425	1530	1565	1450	1300	-	-	

Above refers to standard configurations, contact Airedale for other options.

Installation Data

Point Loadings

Freecool

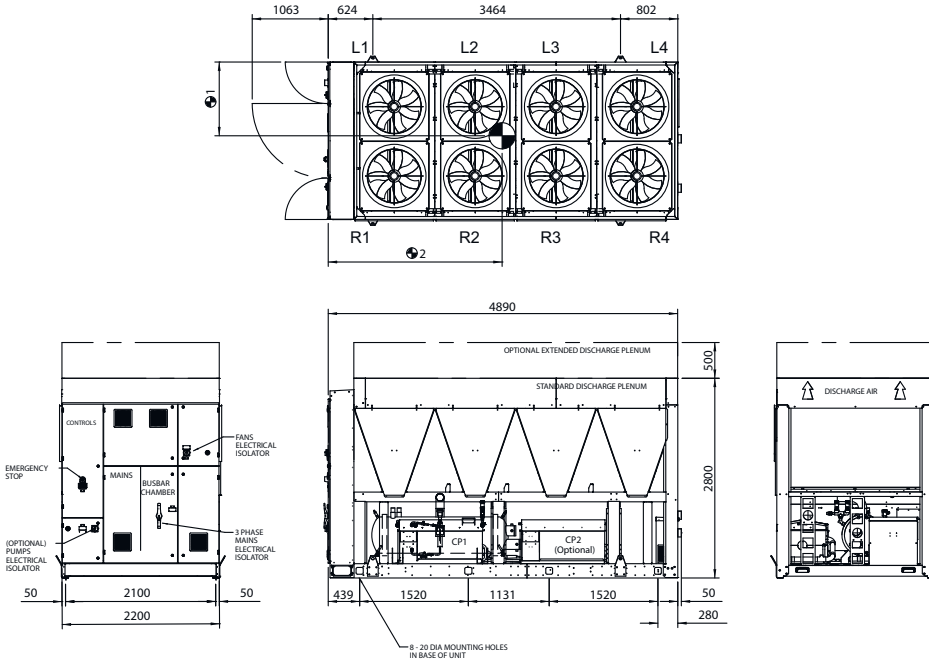

Standard Unit Point Loads																	
	L1	L2	L3	L4	L5	L6	L7	L8	R1	R2	R3	R4	R5	R6	R7	R8	
	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	
TCF11X06S-07	770	730	615	-	-	-	-	-	840	850	730	-	-	-	-	-	
TCF11X08S-07	760	685	660	590	-	-	-	-	785	705	665	595	-	-	-	-	
TCF11X06L-11	880	915	745	-	-	-	-	-	890	910	715	-	-	-	-	-	
TCF11X08L-08	785	730	720	660	-	-	-	-	795	730	705	635	-	-	-	-	
TCF11X10L-10	915	890	870	805	-	-	-	-	925	885	845	780	-	-	-	-	
TCF12X08S-09	795	725	715	650	-	-	-	-	835	780	770	680	-	-	-	-	
TCF12X10S-05	950	920	905	830	-	-	-	-	990	965	930	845	-	-	-	-	
TCF12X12S-05	1085	1045	1020	940	-	-	-	-	1135	1095	1055	960	-	-	-	-	
TCF12X14S-05	950	995	985	930	755	-	-	-	1035	1085	1020	860	720	-	-	-	
TCF12X12L-12	1195	1180	1155	1045	-	-	-	-	1240	1225	1185	1060	-	-	-	-	
TCF12X14L-12	1035	1130	1125	1045	800	-	-	-	1115	1205	1140	950	750	-	-	-	
TCF12X16L-12	975	1195	1245	1220	1005	-	-	-	1005	1215	1250	1205	980	-	-	-	
TCF12X18L-13	895	825	1135	1225	1170	910	-	-	925	870	1125	1180	1075	875	-	-	
TCF12X20L-13	960	885	1205	1345	1280	995	-	-	995	930	1200	1295	1170	950	-	-	


Above refers to standard configurations, contact Airedale for other options.



Installation Data

Point Loadings

Freecool

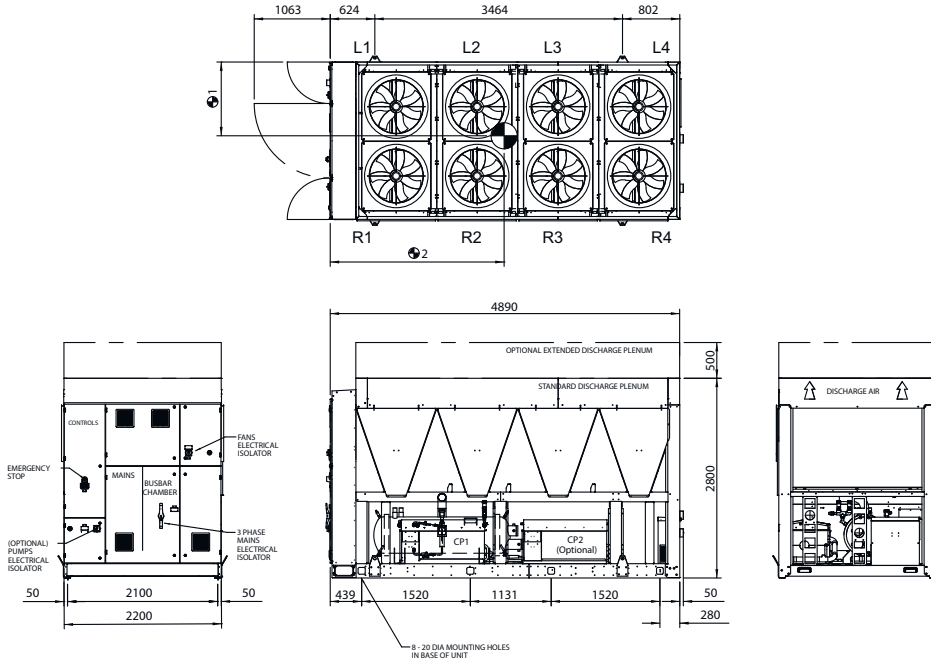

	Standard Unit Point Loads															
	L1 (kg)	L2 (kg)	L3 (kg)	L4 (kg)	L5 (kg)	L6 (kg)	L7 (kg)	L8 (kg)	R1 (kg)	R2 (kg)	R3 (kg)	R4 (kg)	R5 (kg)	R6 (kg)	R7 (kg)	R8 (kg)
TCF22X10S-22	945	985	985	840	-	-	-	-	970	985	930	780	-	-	-	-
TCF22X12S-22	1080	1110	1105	945	-	-	-	-	1105	1105	1055	890	-	-	-	-
TCF22X14S-22	1015	1005	1000	955	850	-	-	-	1020	985	950	885	790	-	-	-
TCF22X12L-23	1215	1305	1310	1070	-	-	-	-	1210	1245	1185	960	-	-	-	-
TCF22X14L-23	1140	1175	1180	1100	950	-	-	-	1115	1100	1060	970	845	-	-	-
TCF22X16L-23	1170	1225	1295	1260	1080	-	-	-	1135	1155	1165	1105	960	-	-	-
TCF22X18L-23	1090	1105	1145	1165	1100	970	-	-	1050	1040	1040	1030	965	870	-	-
TCF22X20L-23	1135	1150	1230	1295	1225	1095	-	-	1090	1070	1100	1115	1055	960	-	-
TCF23X12S-24	1110	1285	1390	1235	-	-	-	-	1145	1265	1290	1110	-	-	-	-
TCF23X14S-24	1075	1145	1200	1140	1000	-	-	-	1090	1125	1125	1035	905	-	-	-
TCF23X16S-25	1195	1245	1315	1275	1090	-	-	-	1200	1215	1225	1145	985	-	-	-
TCF23X18S-25	1045	1055	1130	1200	1140	1015	-	-	1050	1030	1065	1095	1020	920	-	-
TCF23X18L-28	1145	1205	1335	1435	1370	1200	-	-	1125	1135	1200	1240	1160	1025	-	-
TCF23X20L-28	1275	1345	1480	1575	1485	1300	-	-	1235	1240	1305	1315	1225	1085	-	-
TCF23X22L-28	1340	1420	1595	1705	1555	1410	-	-	1280	1295	1385	1410	1280	1180	-	-
TCF23X24L-28	1410	1490	1665	1825	1745	1540	-	-	1330	1340	1425	1500	1425	1285	-	-
TCF24X16S-26	1260	1375	1560	1615	1355	-	-	-	1275	1340	1435	1400	1185	-	-	-
TCF24X18S-26	1195	1255	1355	1425	1350	1175	-	-	1195	1215	1260	1265	1170	1025	-	-
TCF24X20S-26	1265	1335	1480	1590	1510	1320	-	-	1230	1255	1335	1360	1275	1130	-	-
TCF24X22S-27	1330	1410	1585	1715	1570	1430	-	-	1280	1300	1410	1455	1330	1225	-	-
TCF24X24S-27	1455	1530	1705	1830	1710	1505	-	-	1385	1400	1505	1540	1430	1280	-	-
TCF24X22L-21	1345	1425	1600	1730	1585	1440	-	-	1295	1325	1435	1480	1355	1245	-	-
TCF24X24L-21	1470	1550	1725	1850	1730	1520	-	-	1405	1425	1530	1565	1450	1300	-	-

Above refers to standard configurations, contact Airedale for other options.

**Installation Data**

**Unit Lifting**


- Employ lifting specialists
- Local codes and regulations relating to the lifting of this type of equipment should be observed
- Use the lifting eye bolts/lifting lugs provided
- Attach lifting chains to each of the lifting eye bolts/lifting lugs provided; each chain and eye bolt must be capable of lifting the whole chiller
- Lifting hole / lug dimension: 40mm
- Use the appropriate spreader bars/lifting slings with the holes/lugs provided
- Lift the unit slowly and evenly
- If the unit is dropped, it should immediately be checked for damage and reported to Airedale

**CAUTION**  
Only use lifting points provided.

The unit should be lifted from the base and where possible, with all packing and protection in position. If any other type of slinging is used, due care should be taken to ensure that the slings do not crush the casework or coil.

**Lifting Dimensions**

**4 Point**

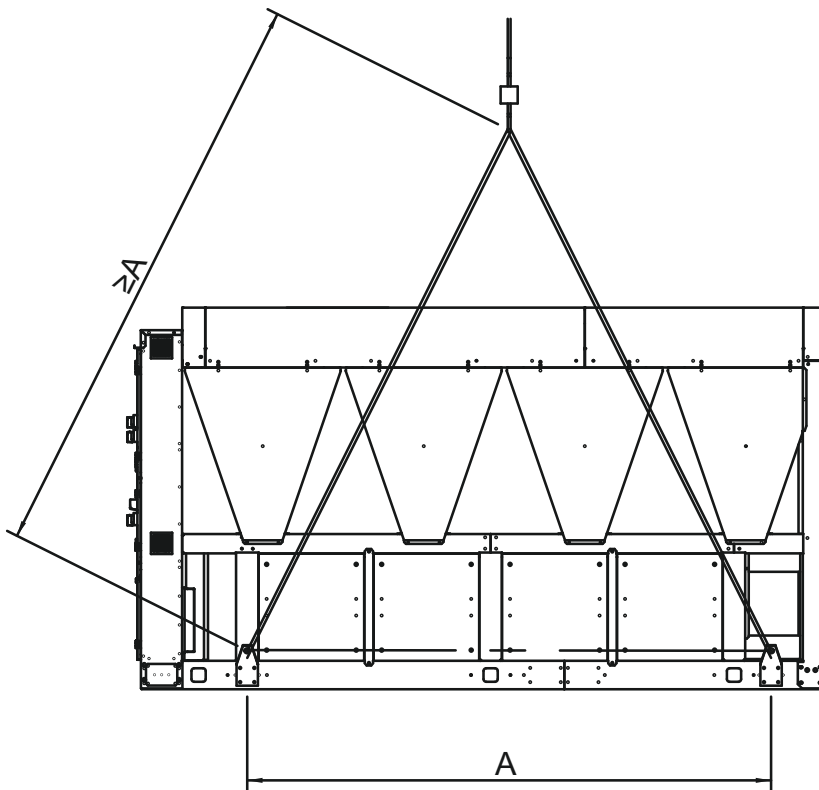


Number of Fans	A (mm)
4	1533
6	2332
8	3464
10	4077

Installation

Installation Data

Lifting Dimensions

8 Point

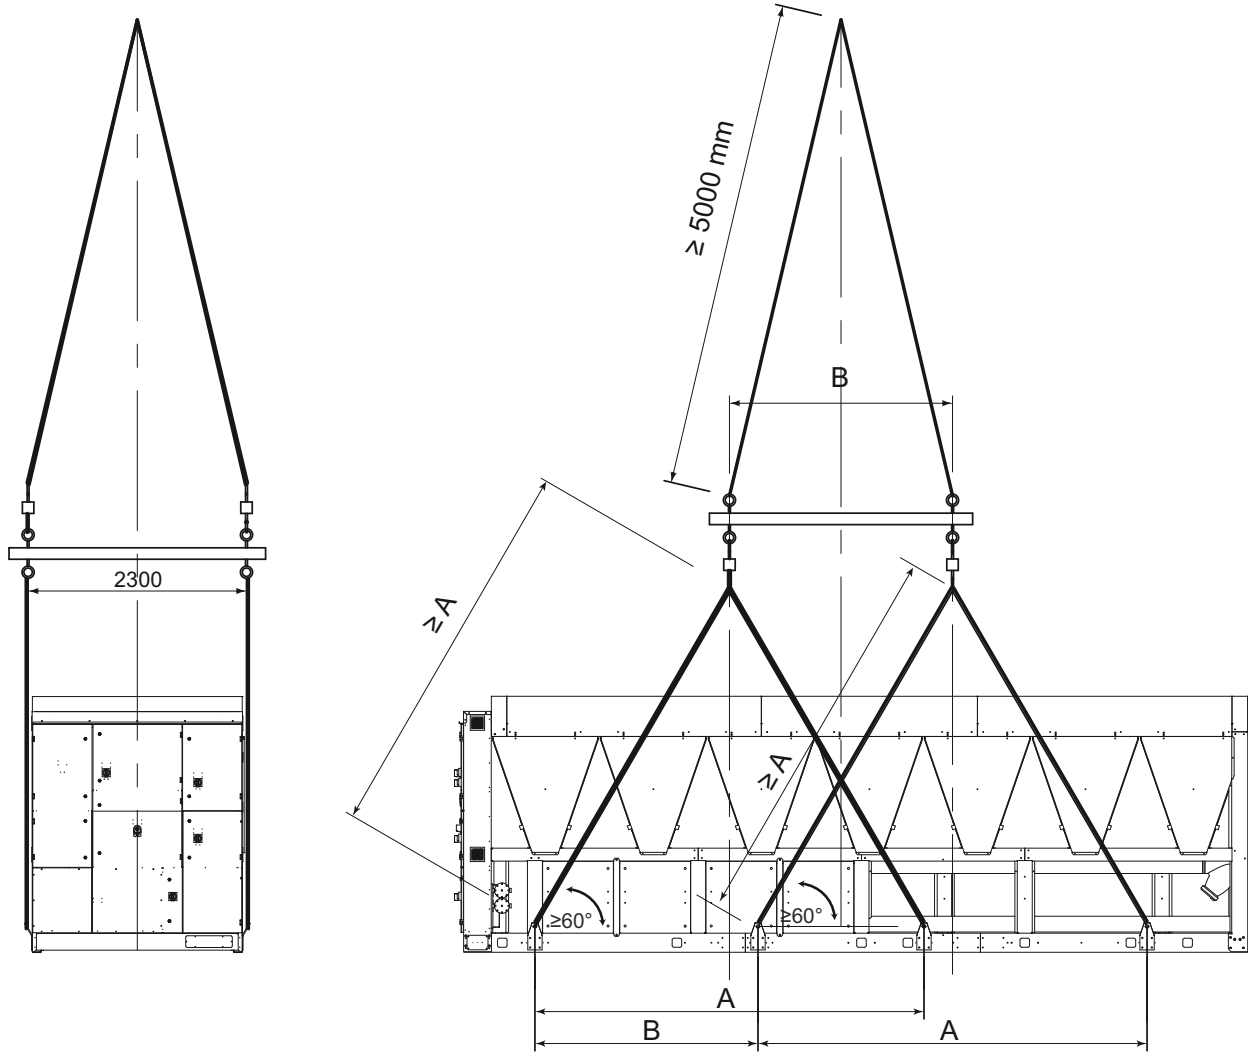

hsallaton





Number of Fans	Single Circuit Machines		Dual Circuit Machines	
	A (mm)	B (mm)	A (mm)	B (mm)
12	3600	1536	3600	1490
14	4500	1536	4500	1536
16	4300	3100	4300	3100
18	5500	2800	5200	2968
20	6500	3164	6500	3139
22	–	–	6650	3966
24	–	–	6650	4950



Installation Data

General Arrangement

4 Fan

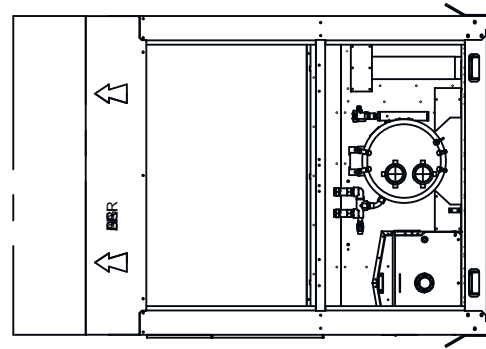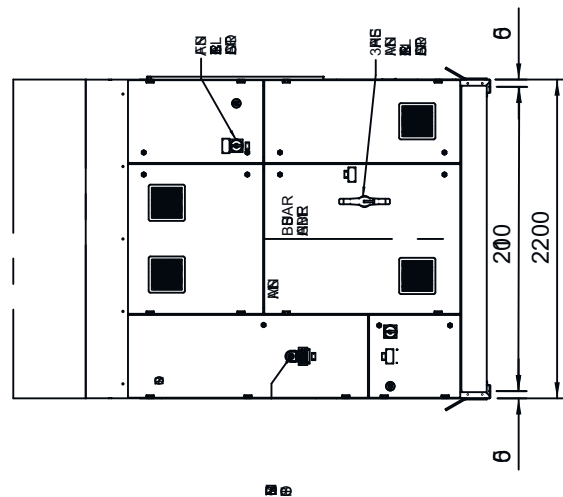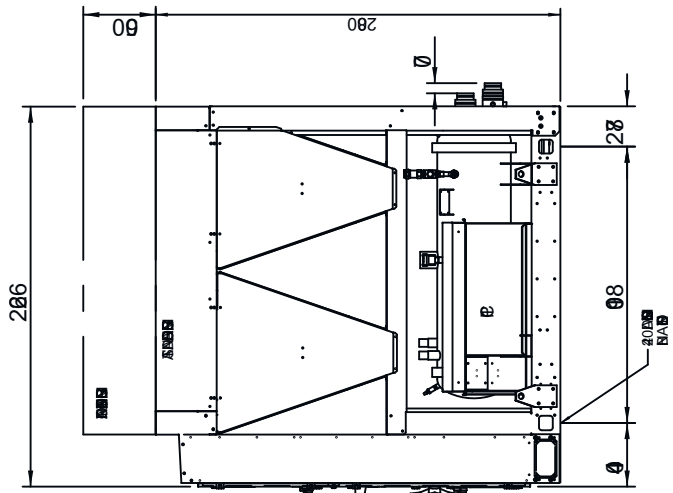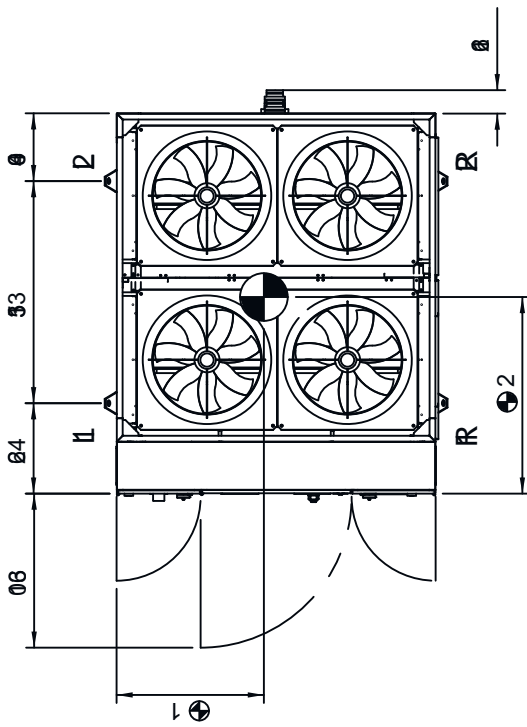


Installation

Installation Data

General Arrangement

6 Fan


hsallaton

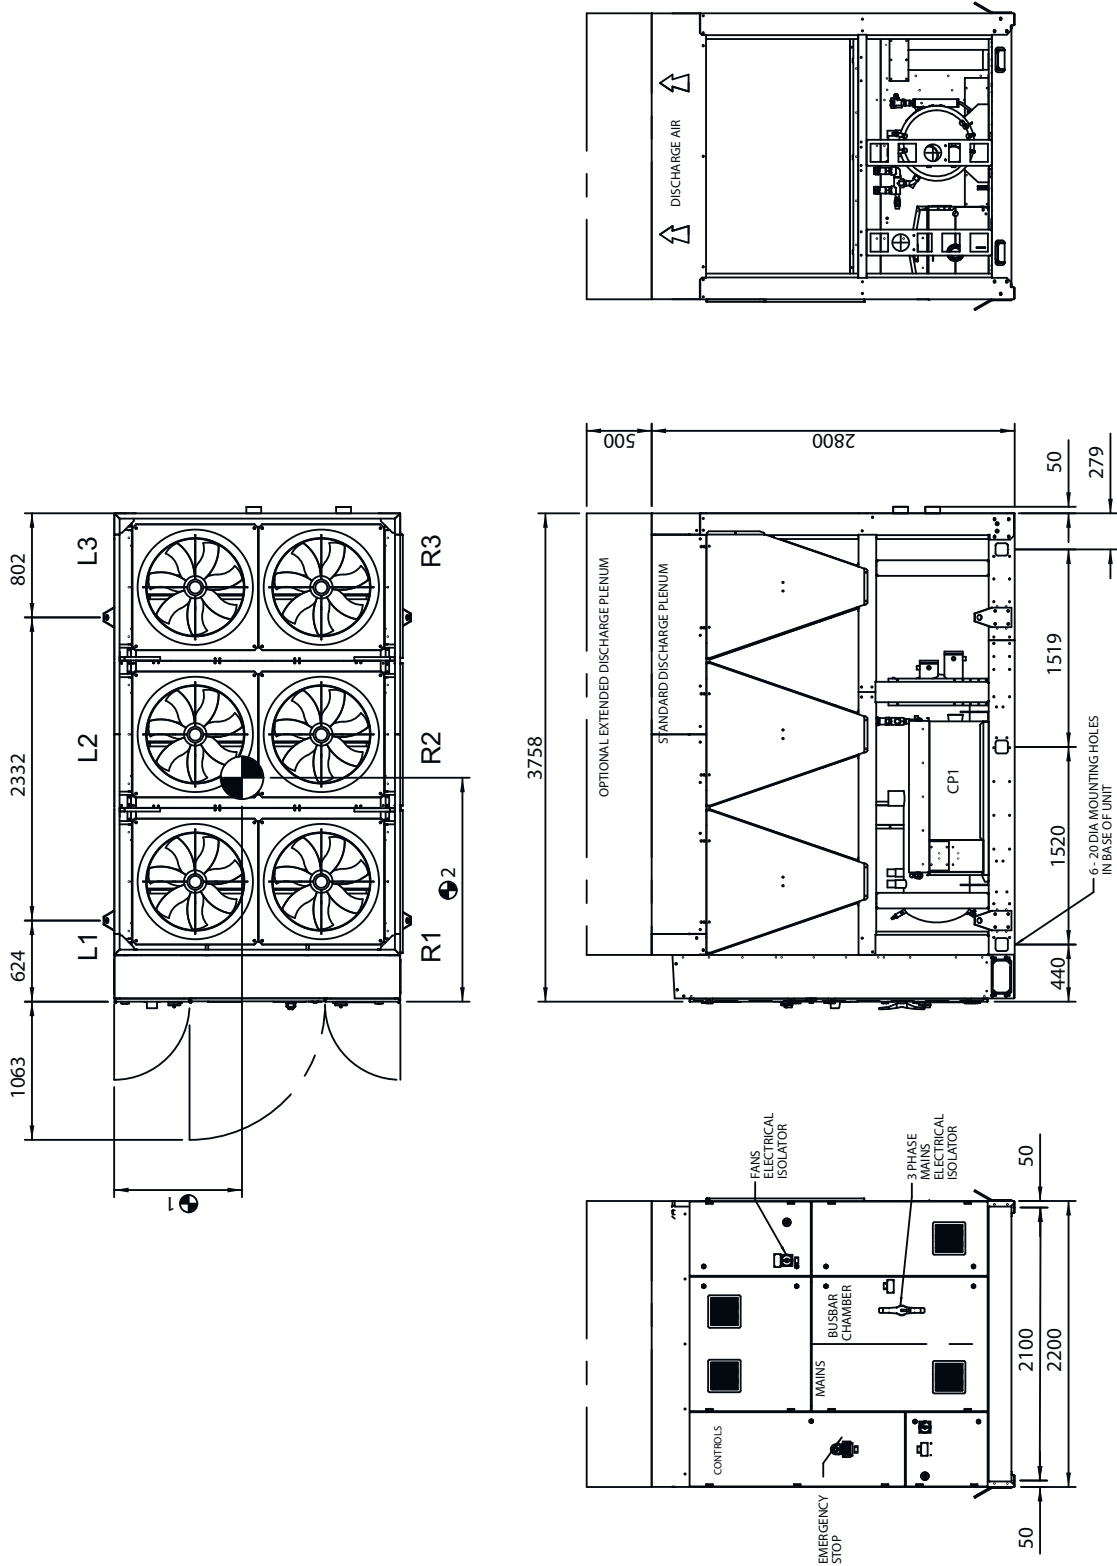

Installation Data

General Arrangement

8 Fan

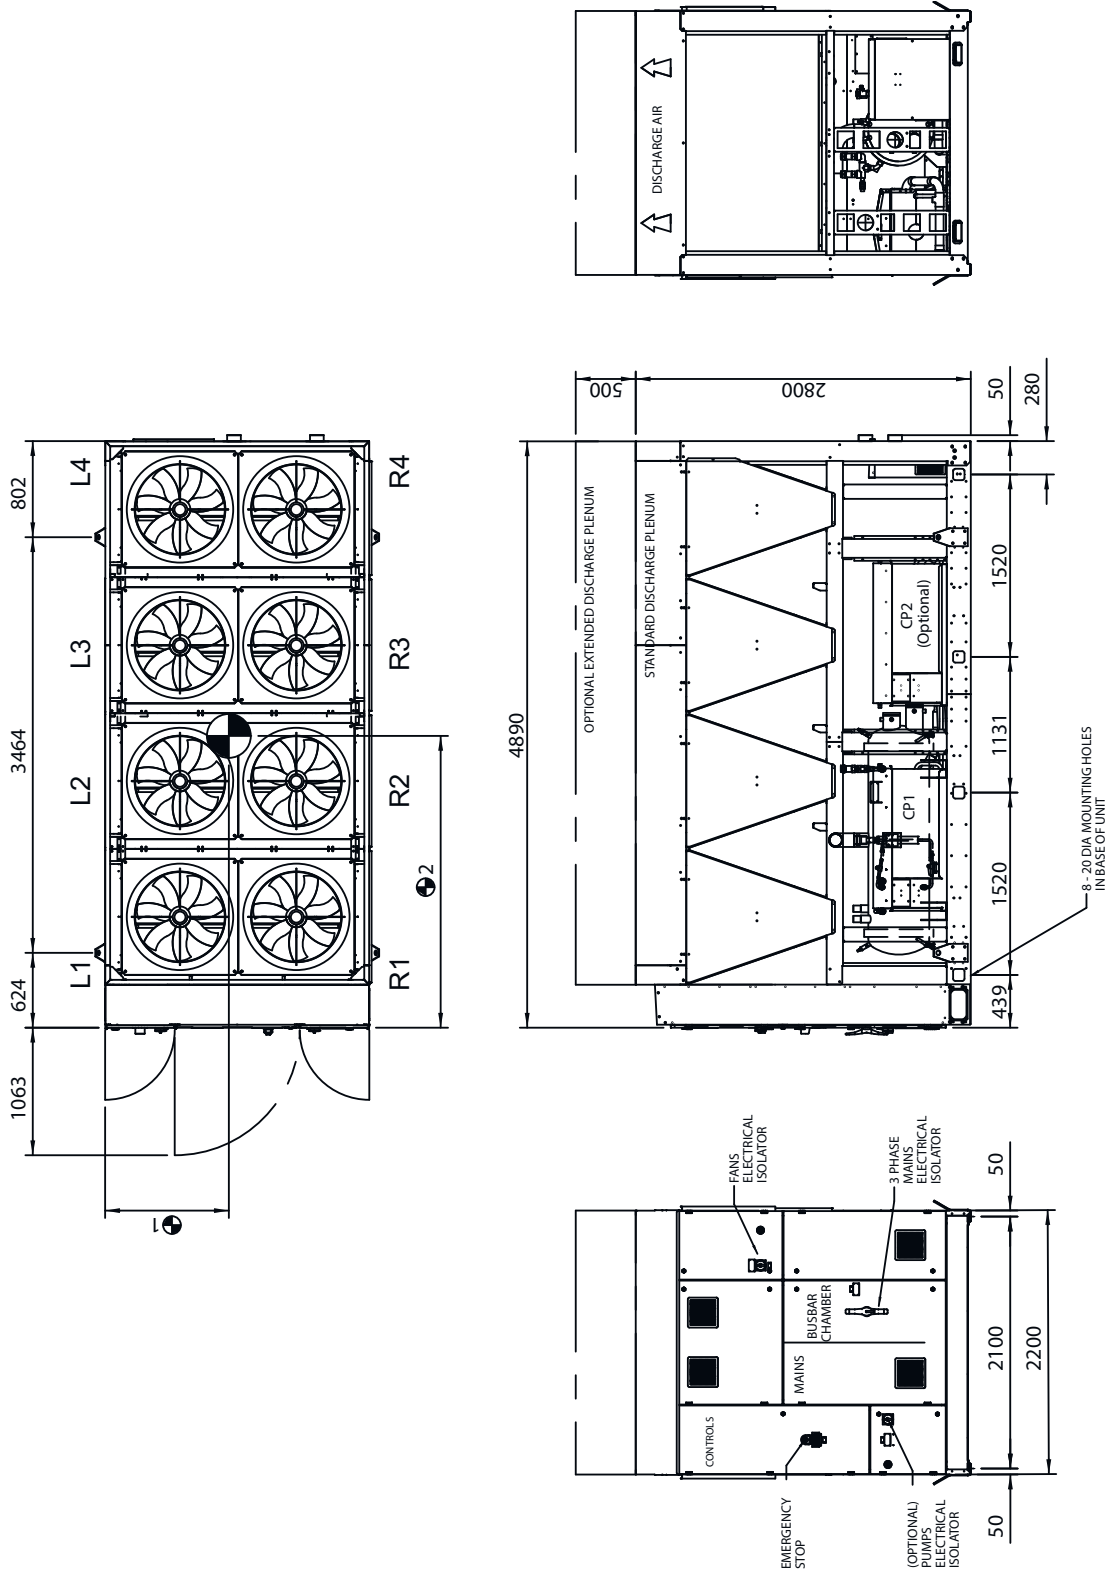


Installation Data

General Arrangement

10 Fan


hsallaton

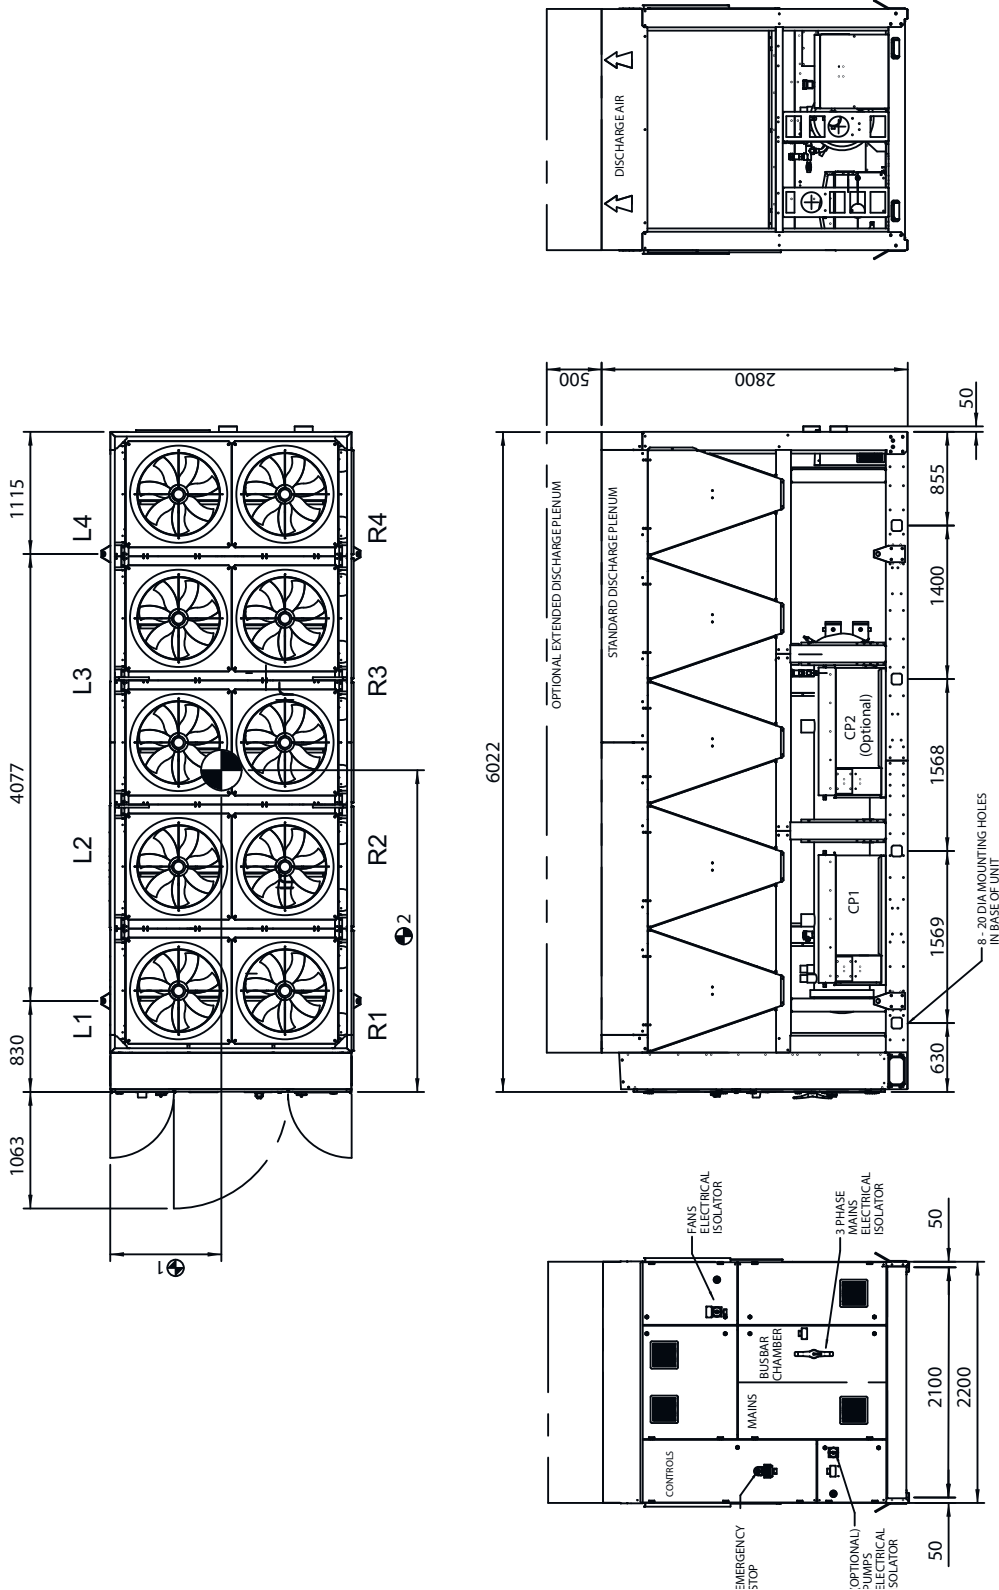

Installation Data

General Arrangement





12 Fan Single Circuit

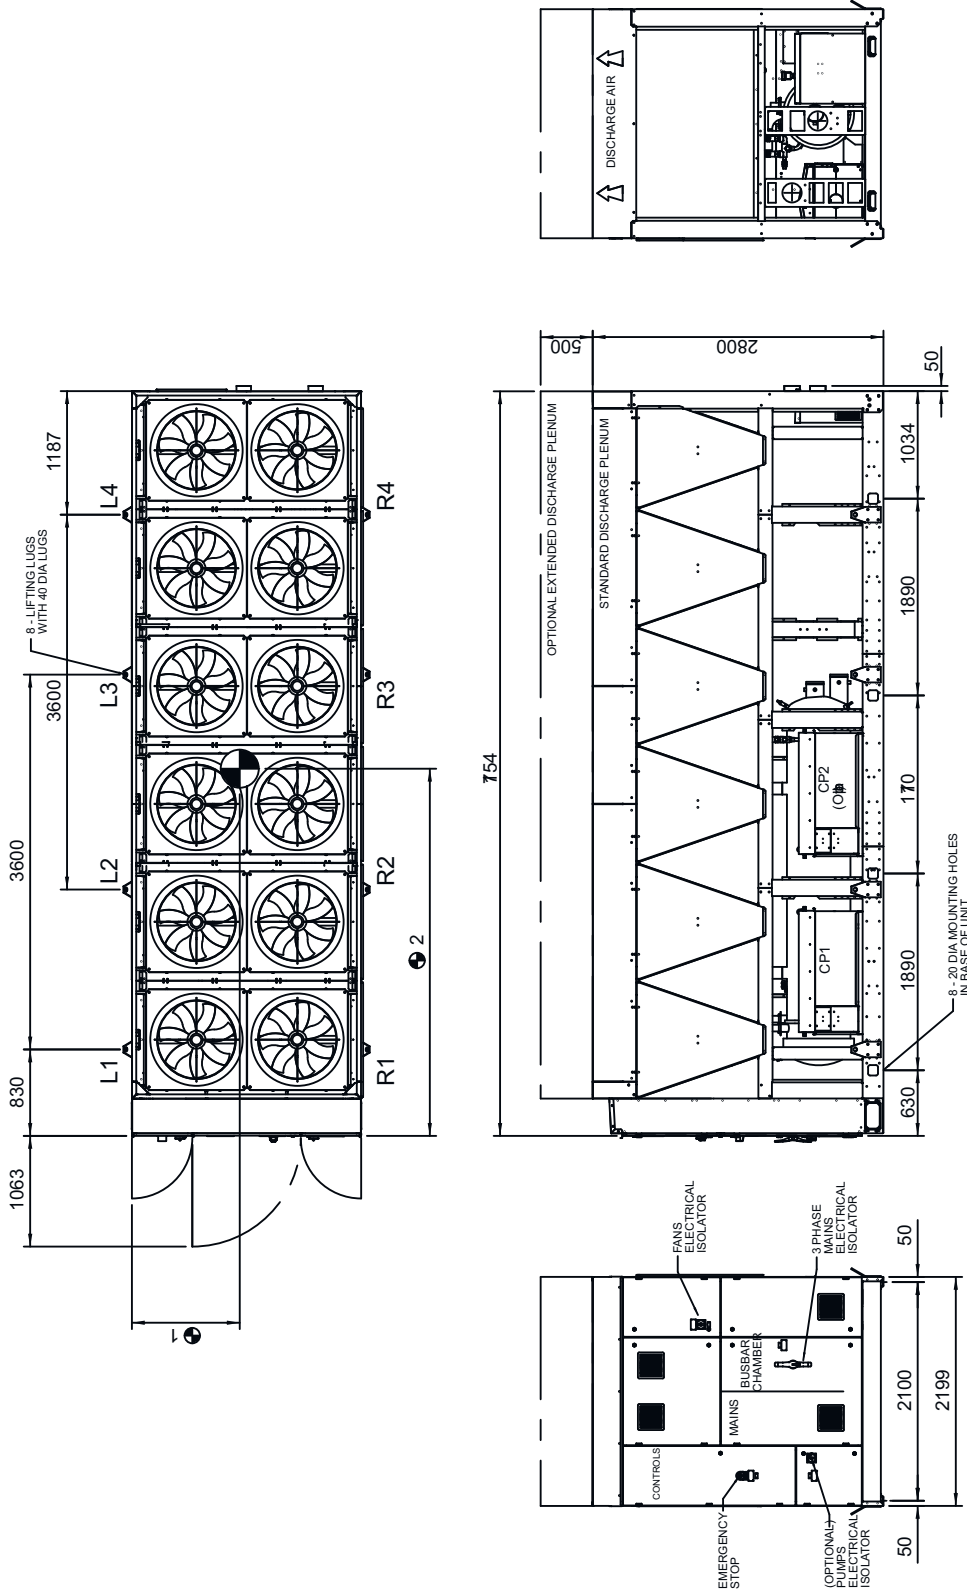

Installation Data

General Arrangement

12 Fan Dual Circuit

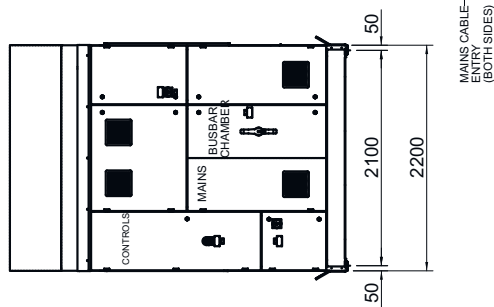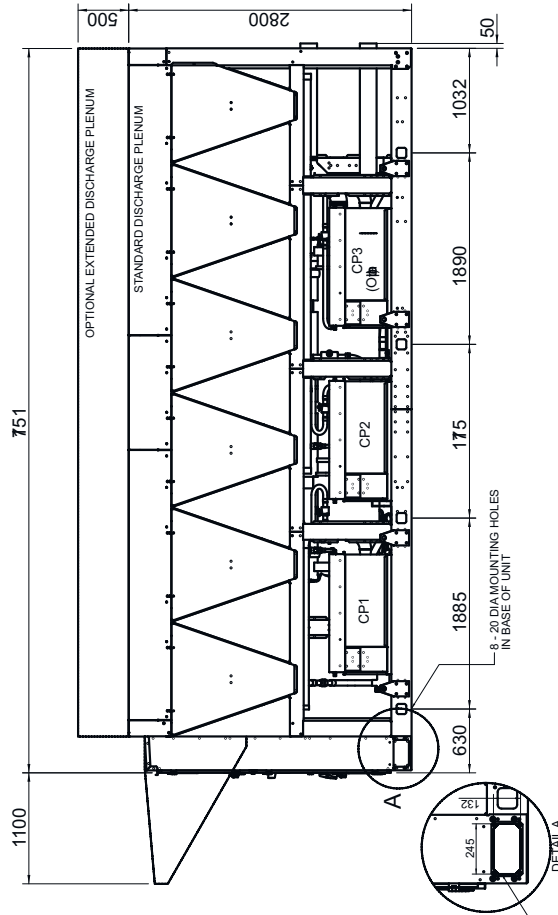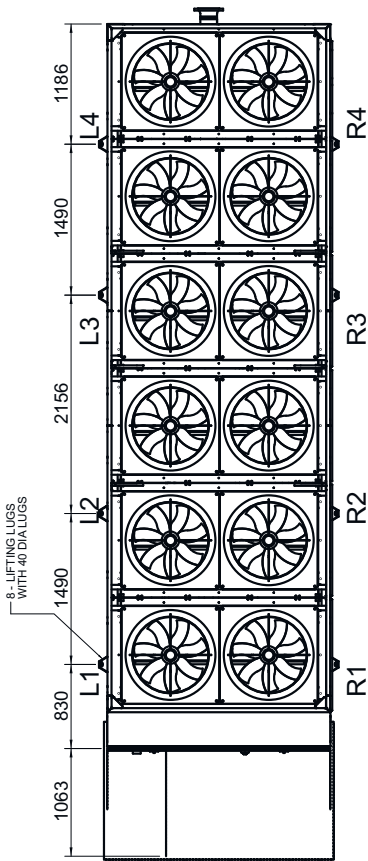


hsallaton

Installation Data

General Arrangement

14 Fan Single Circuit

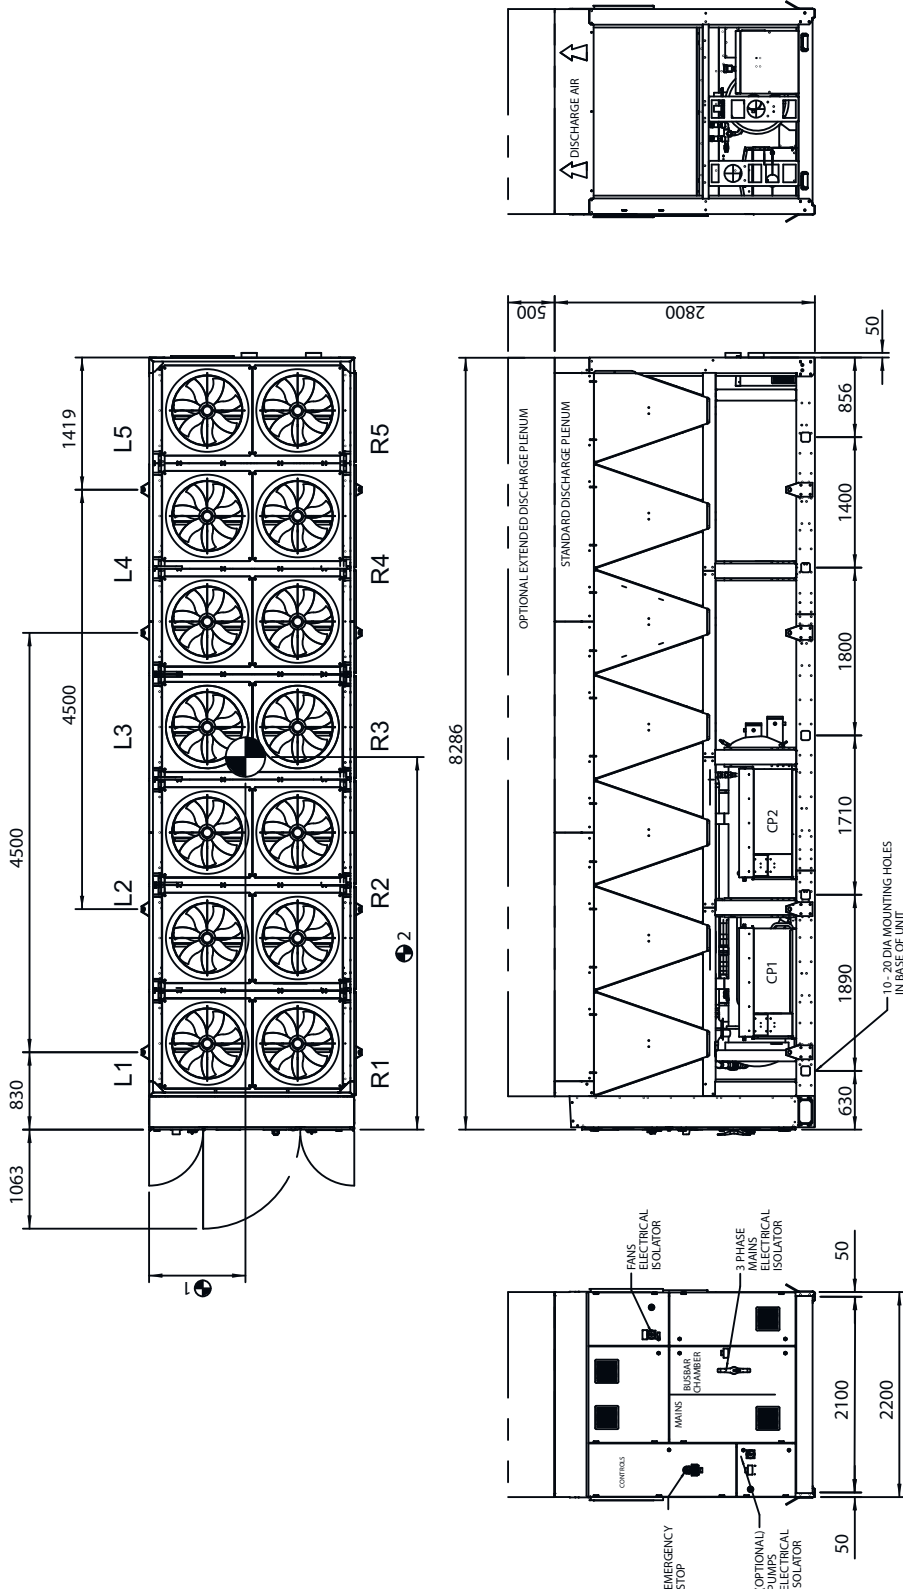


Installation Data

General Arrangement

14 Fan Dual Circuit

hsallaton

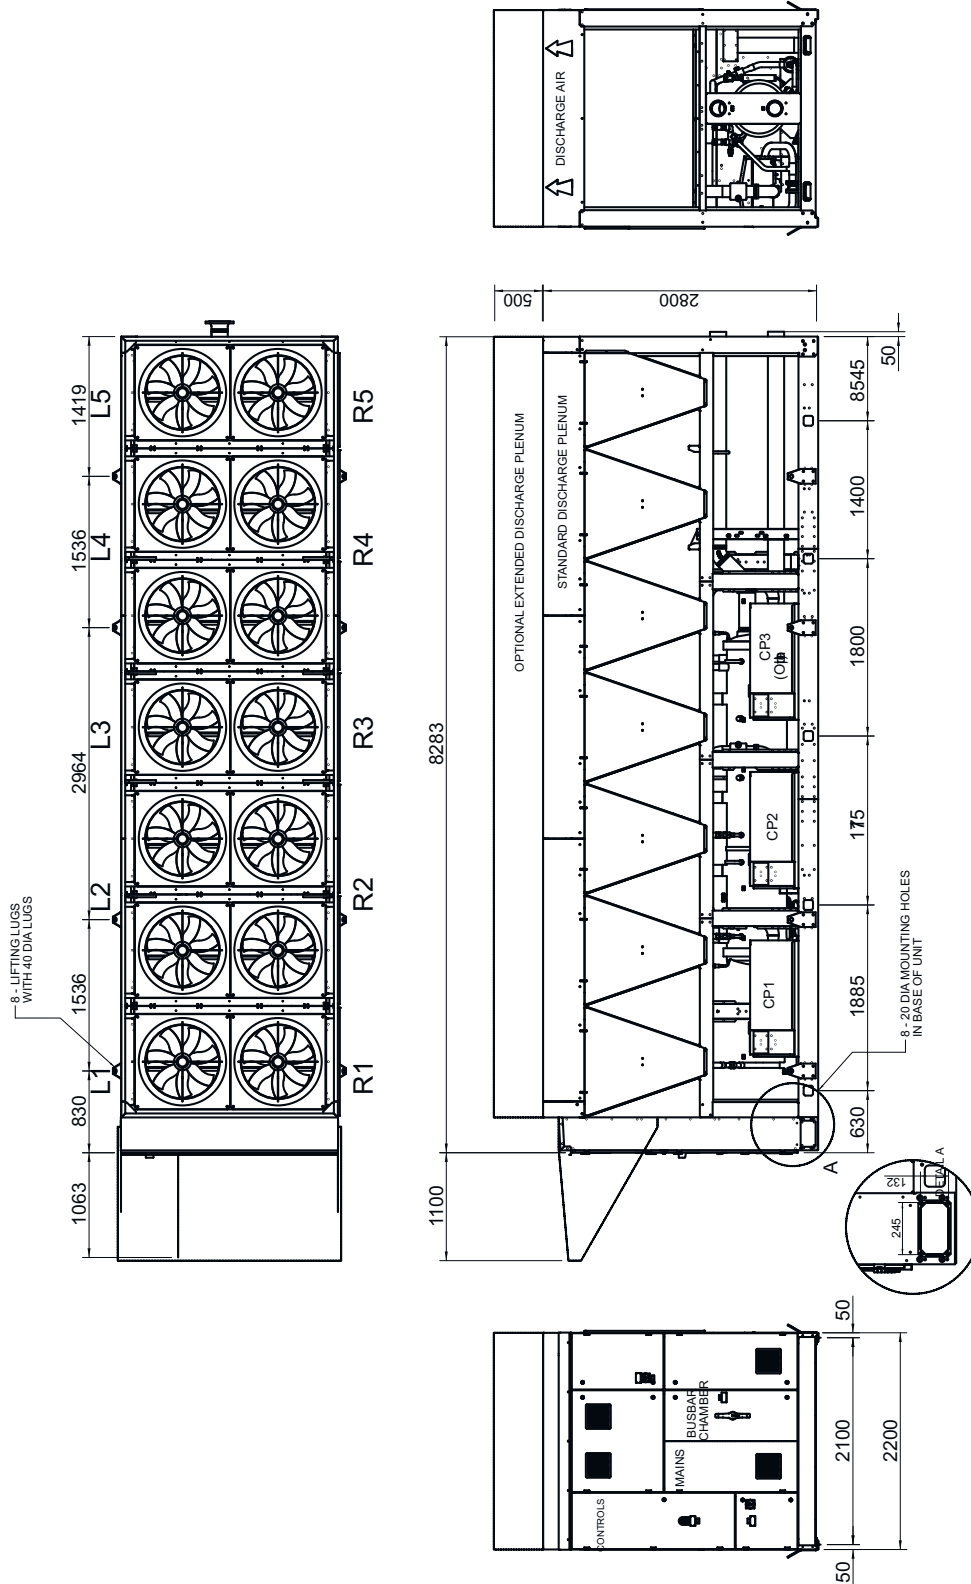




Installation Data

General Arrangement

16 Fan Single Circuit

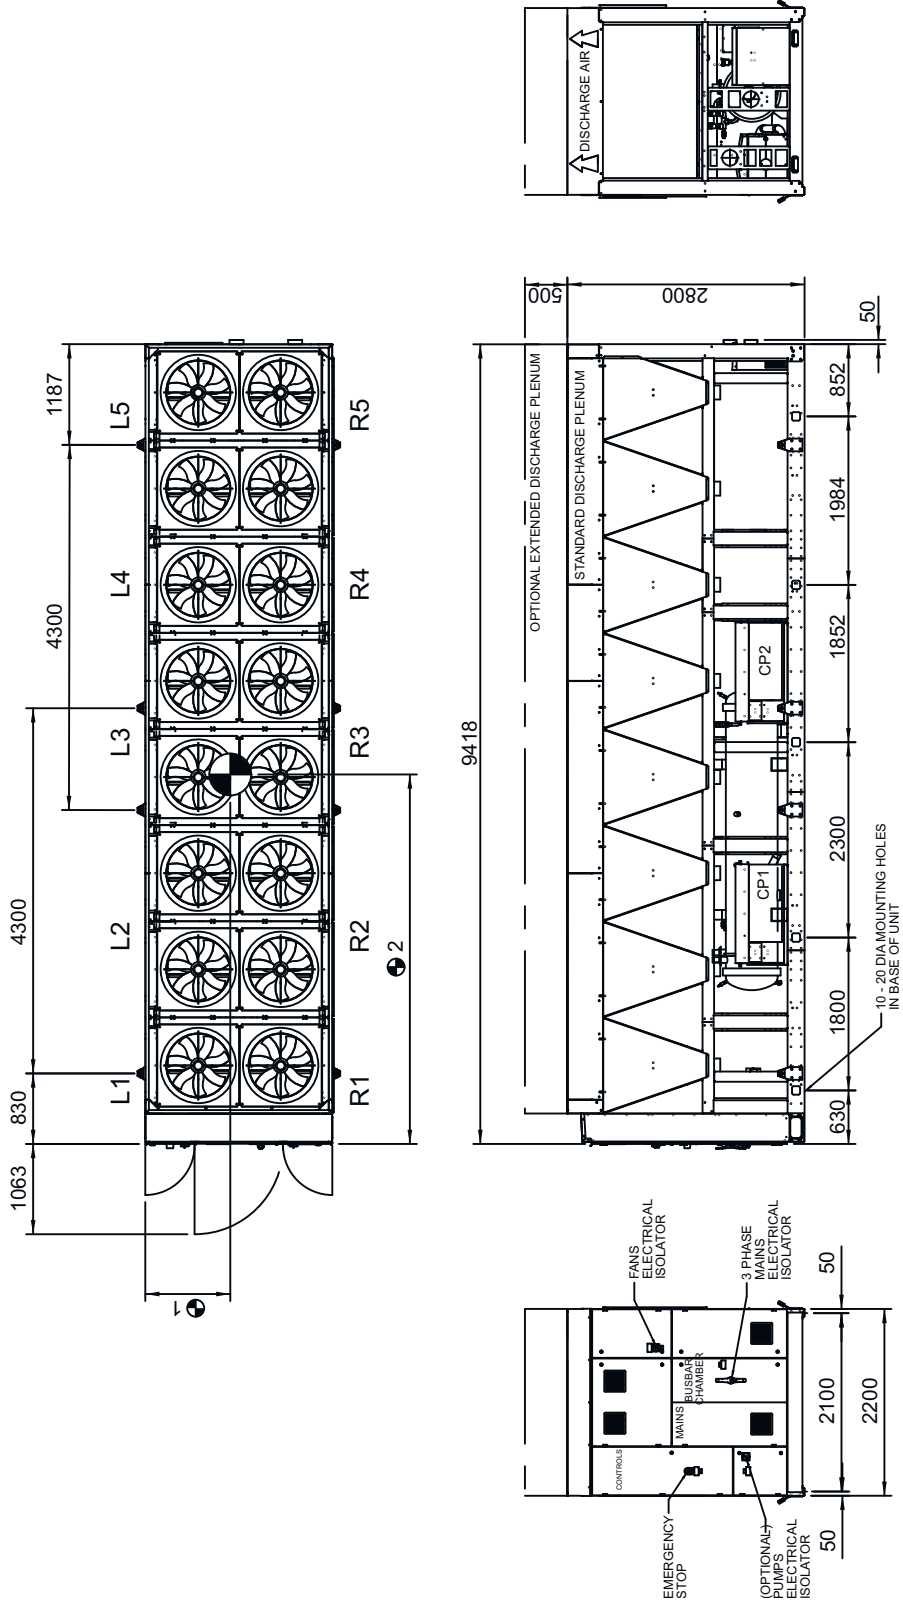


Installation Data

General Arrangement

16 Fan Dual Circuit


hsallaton

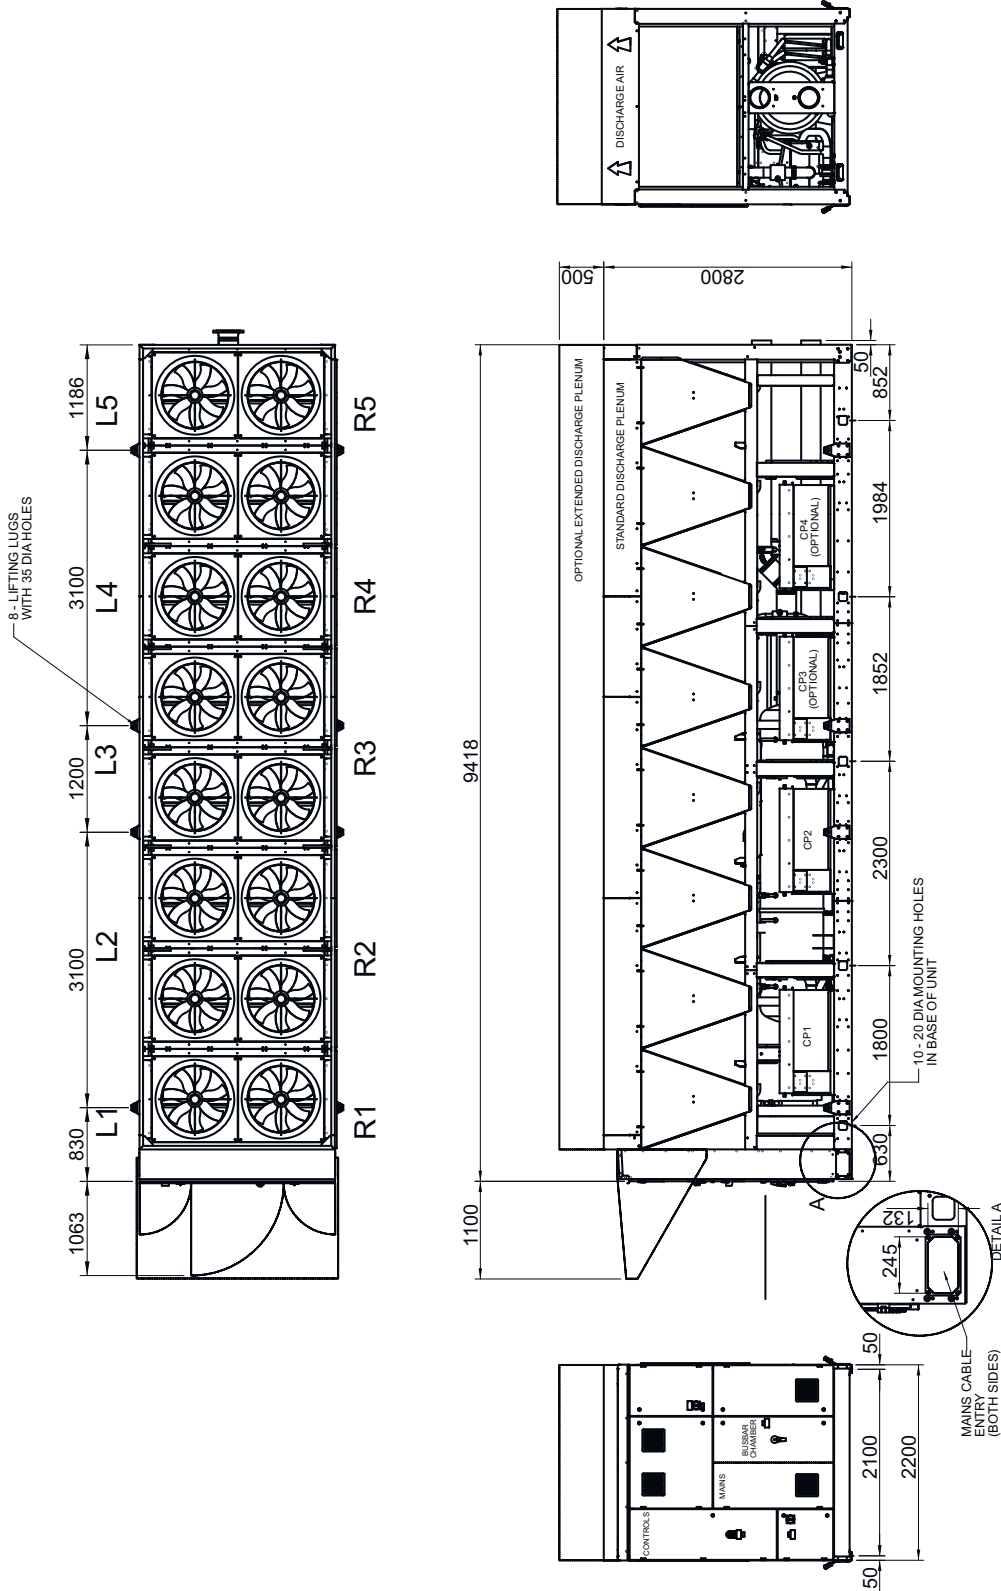

Installation Data

General Arrangement

18 Fan Single Circuit

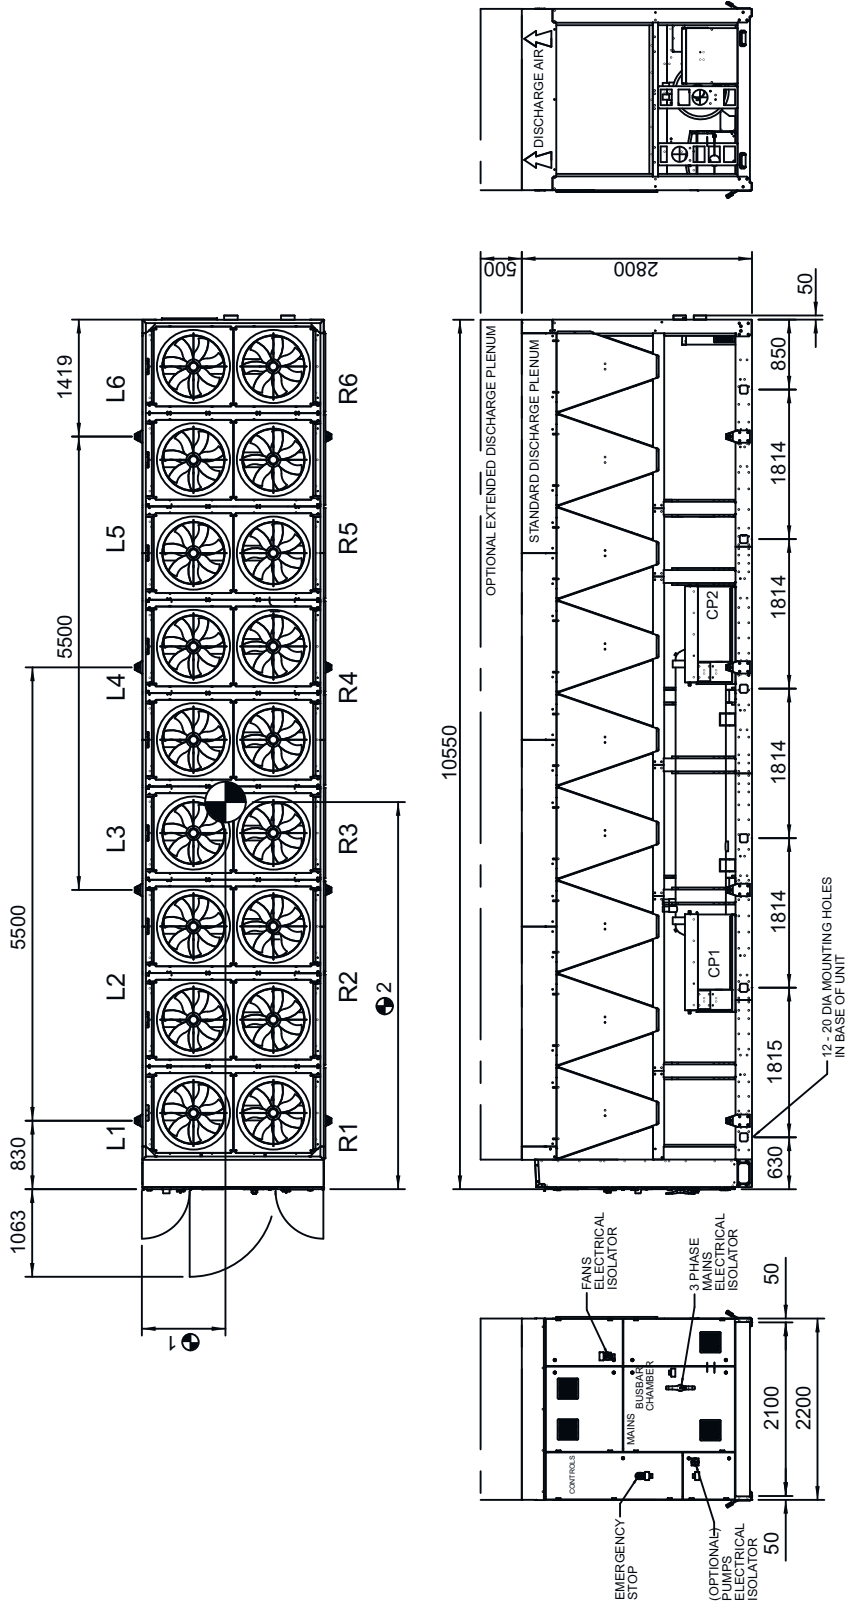


Installation Data

General Arrangement

18 Fan Dual Circuit


hsallaton

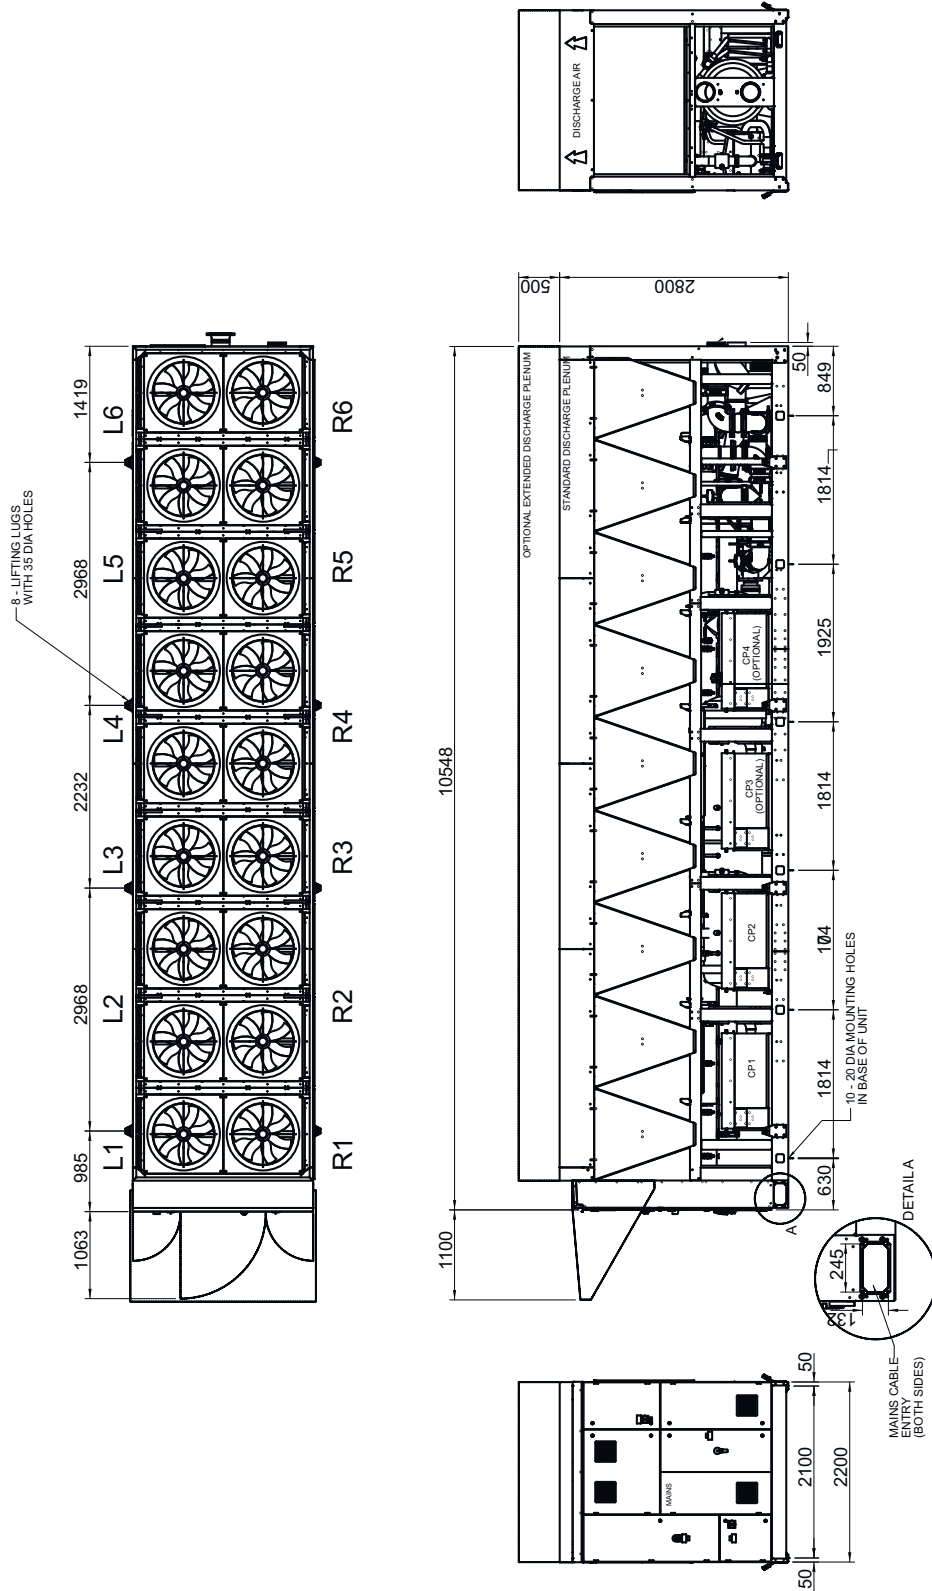

Installation Data

General Arrangement

20 Fan Single Circuit

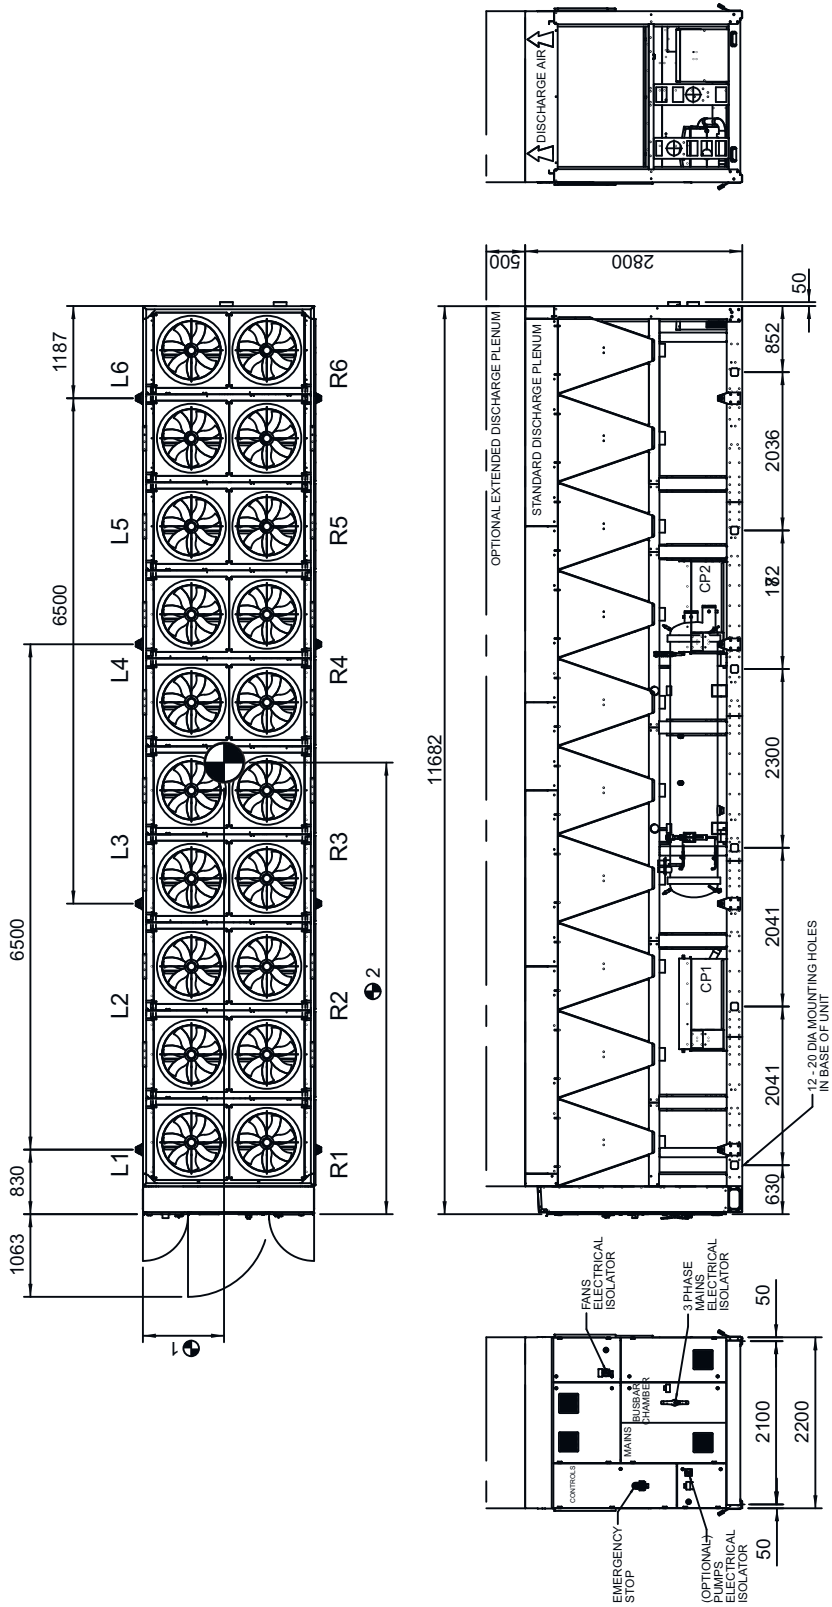


Installation Data

General Arrangement

20 Fan Dual Circuit

hsallaton

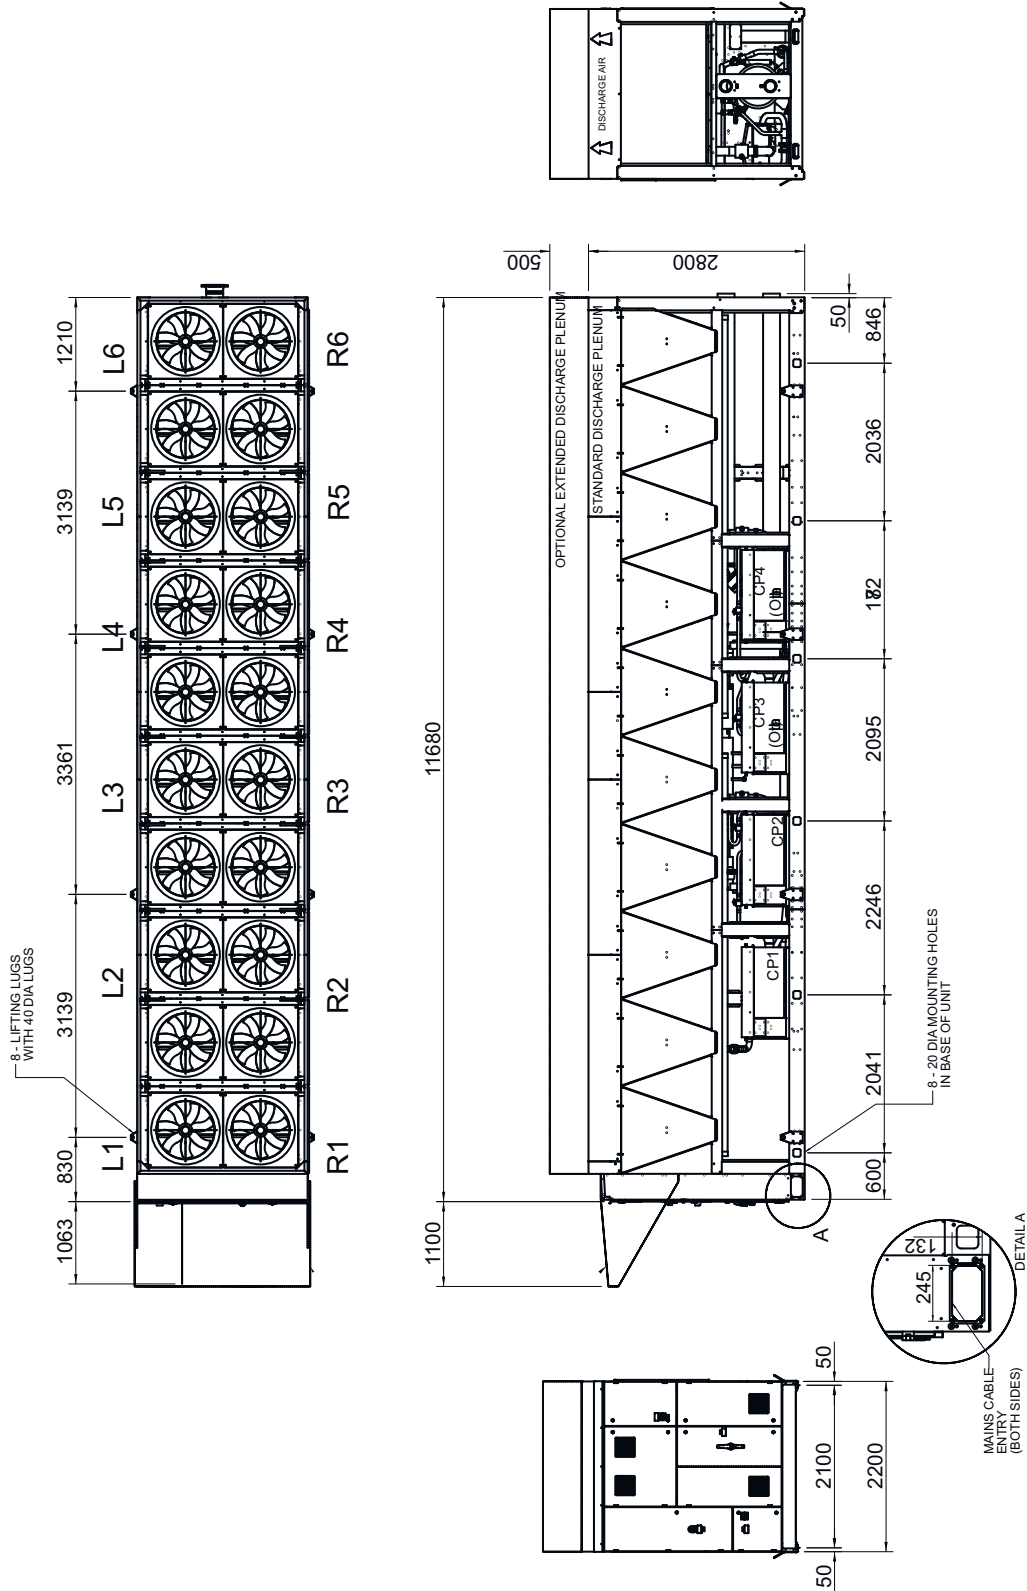






Installation Data

General Arrangement

24 Fan Dual Circuit

hsallaton

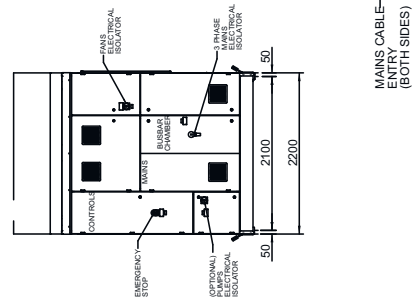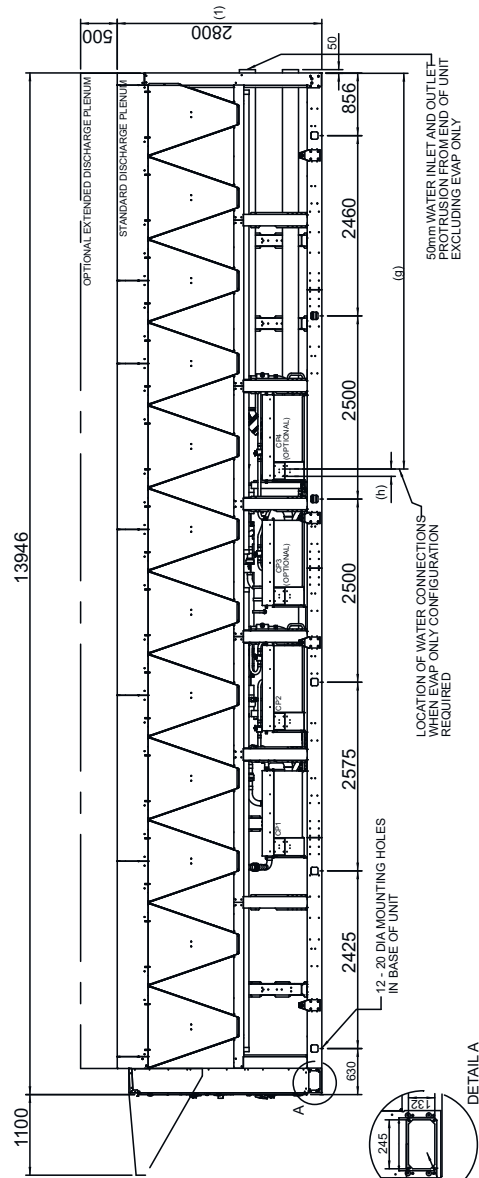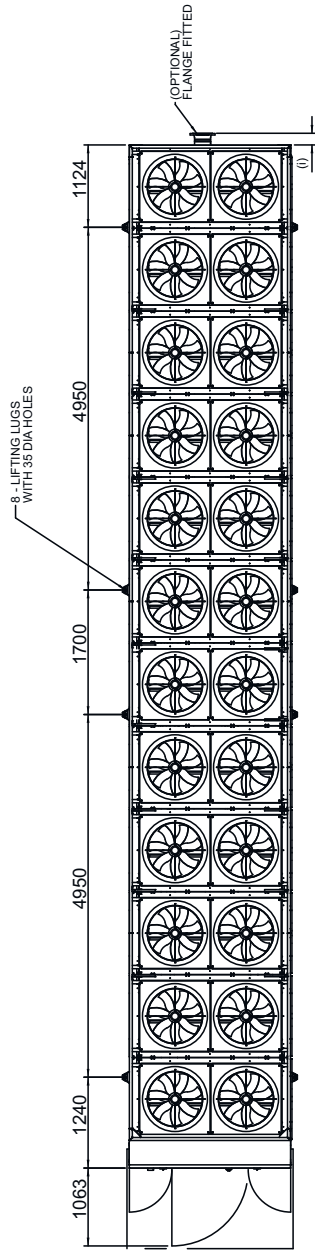




## Installation Data

### Positioning

The installation position should be selected with the following points in mind:

- Position on a stable and even base, levelled to ensure that the compressor operates correctly
- Levelling should be to +/- 5mm
- Where vibration transmission to the building structure is possible, fit spring anti-vibration mounts and flexible water connections
- Observe airflow and maintenance clearances
- Pipe work and electrical connections are readily accessible
- Where multiple units are installed, due care should be taken to avoid the discharge air from each unit adversely affecting other units in the vicinity
- Within a side enclosed installation, the fan MUST be higher than the enclosing structure
- Increase airflow and maintenance clearances for side-enclosed or multiple unit applications
- Ensure there are no obstructions directly above the fans
- Allow free space above the fans to prevent air recirculation

### Airflow & Maintenance Clearances

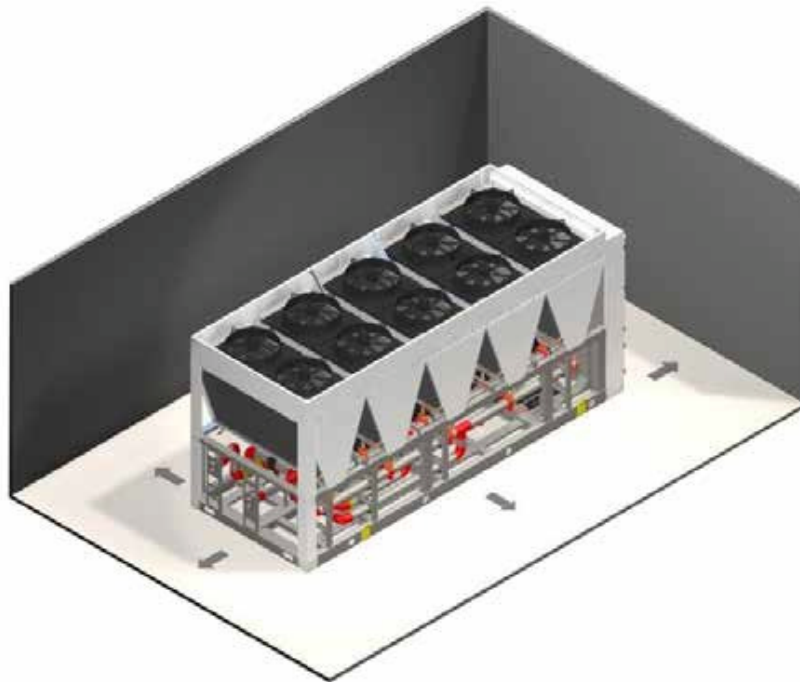

Application	Distance from Overall Base Dimension
Single unit	1300mm
Side-enclosed or multiple units	2600mm

**Installation Data**

**Anti Vibration Mounting (Optional)**


**Spring Type**

Each mount is coloured to indicate the different loads, refer to instructions supplied for correct allocation.

**Dimensions**


	A(1)	B	C	D	E	F
TCC / TCF Units	180	130	225	186	20	16

(1) Unloaded dimension



**Components**

- |    |                        |    |                      |
|----|------------------------|----|----------------------|
| 1  | Locating Screw         | 6b | Lower Retaining Nuts |
| 2  | Retaining Nut & Washer | 7  | Spring Assembly      |
| 3  | Levelling Screw        | 8  | Pressure Plate       |
| 4  | Levelling Lock Nut     | 9  | Top Plate            |
| 5  | Retaining Studs        | 10 | Bolting-down Holes   |
| 6a | Upper Retaining Nuts   |    |                      |



**Installation**

1. Locate and secure mount using bolting down holes (10) in base plate.
2. Ensure mounts are located in line with the unit base.
3. If applicable, remove compressor enclosure covers to allow access to mount fixing holes in the unit base.
4. Lock the upper retaining nuts (6a) to the underside of the top plate (9) before a load is applied.
5. Slacken levelling lock nut (4). (the levelling screw will not move if this is not slackened)
6. Remove retaining nut and washer (2), lower the unit onto the mounts and replace retaining nut and washer.

Beginning with the mount with the largest deflection adjust the height of each mount using the levelling screw (3).

**CAUTION**



Mountings must be adjusted incrementally in turn. Do not fully adjust 1 mount at a time as this may overload and damage springs.

WHEN ALL MOUNTS ARE LEVEL, LOCK EACH INTO PLACE USING THE LEVELLING LOCK NUT (4)

7. Lock all retaining nuts (6a and 6b) to the extreme ends of the retaining studs (5)

**CAUTION**




Do not connect any services until all anti vibration mounts have been fully adjusted.

**Pad Type**

**Components/Installation**


1. M16 Bolt (Not Supplied)
2. Washer (Not Supplied)
3. Fixing Pad 6173231
4. A V Pad 6173223
5. 2 x M16 Nut (Not Supplied)
6. Unit Base
7. Unit Mounting Plinth

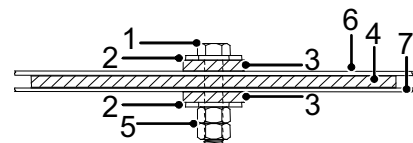

**Anti Vibration Mount location to Unit and Plinth**

The Anti Vibration mount is larger than the unit base. Consideration must be made with regard to steelwork / concrete plinth sizes. Full information is available on the approved General Arrangement drawings.

The base of the unit is open. Considerations must be made for service and maintenance requirements if the unit is installed on a gantry.

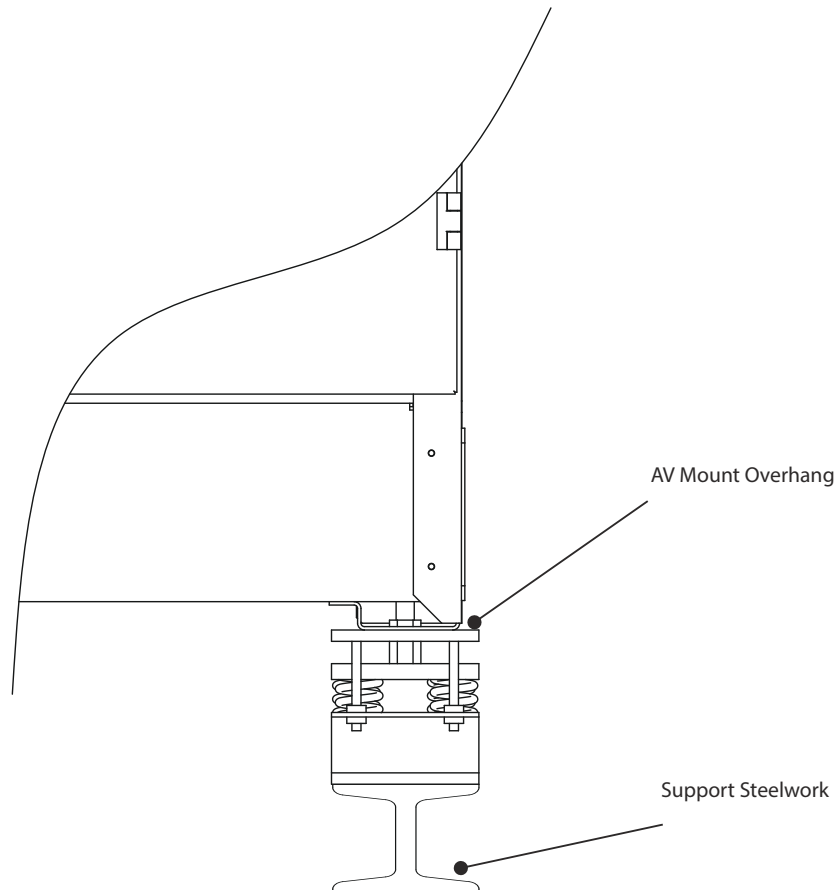

**Interconnecting Wiring**

**General**

As standard the equipment is designed for 400V, 3 phase, 3 wire 50Hz and a separate permanent 230V, 1 phase, 50Hz supply, to all relevant IEE regulations, British standards and IEC requirements.

The control voltage to the interlocks is 24V, always size the low voltage interlock and protection cabling for a maximum voltage drop of 2V.

Avoid large voltage drops on cable runs, particularly low voltage wiring.

**CAUTION** 

A fused and isolated electrical supply of the appropriate phase, frequency and voltage should be installed.

Wires should be capable of carrying the maximum load current under non-fault conditions at the stipulated voltage.

A separately fused permanent single phase and neutral supply **MUST BE FITTED** for the evaporator trace heating and control circuits,

FAILURE to do so will INVALIDATE WARRANTY.


**CAUTION** 


ALL work **MUST** be carried out by technically trained competent personnel.



Isolate **REMOTE**LY the mains incoming supply to the BUSBAR chamber prior to maintenance or repair work.

hsallaton

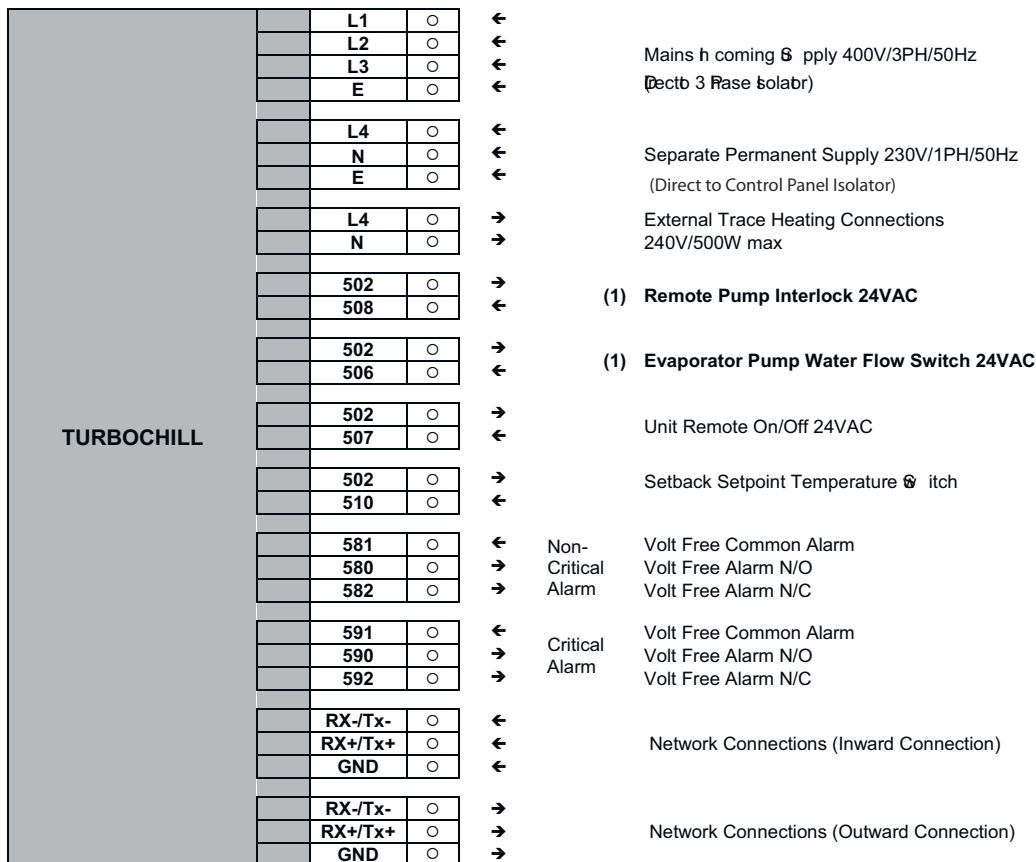

**CAUTION**  (1) **MUST** be directly wired to the chiller to validate warranty.

### Power Quality & Harmonics

Variable speed drives are now common place due to their efficiency and versatility. Not ignoring these facts, care must be taken when installing VSD technology into new and existing installations. This is due to the effect the introduction of such technology may have on line harmonics of a buildings electrical system. VSDs by their nature cause distortion of the AC line by drawing current in pulses, rather than continuously from the supply resulting in harmonic generation. The useful power to a motor is that obtained from the fundamental frequency of 50Hz. The additional currents at the higher frequencies are not useful to the appliance and are therefore transmitted back onto the line.

Examples of other non-linear loads that cause harmonics are:-

#### Single phase loads, e.g.

- Switched mode power supplies
- Personal computers
- HF fluorescent ballasts
- Compact fluorescent lamps

#### Three phase loads, e.g.

- Variable frequency drives
- Inverters
- Large UPS systems

The distortion of the line caused by harmonics can cause the following associated issues:-

- Erroneous operation of control systems
- Nuisance tripping of circuit breakers
- Overloading of transformers
- Overloading of capacitors
- Overvoltage problems
- Excessive currents in neutral conductor

The 3rd, 5th, 7th and 9th harmonics are considered to be the predominant frequencies produced by non-linear loads. To minimize the harmonic effect, each Turbocor compressor is fitted with a 5% line reactor to help reduce the harmonics and improve the displacement power factor above 0.95<sup>(1)</sup>. However, to further reduce the effects and to help meet limits for engineering recommendation (ER) G5/4, the following guidelines can be followed.

### Current Harmonics

Harmonic currents contribute to system losses. Mitigation measures can be implemented in the following ways:

- a) Install passive/active harmonic filters
- b) Install the unit as far from the source transformer as possible

### Voltage Harmonics

Harmonic voltage distortion causes disturbance to other loads and increases losses in them. Methods for harmonic voltage reduction can be achieved in the following ways:

- a) Increase the size of the supply transformer
- b) Connect the unit to a point with a high fault level (low impedance)
- c) Keep the unit as far from the point of common coupling (PCC) as possible

### Engineering Recommendation G5/4


It is important to understand that G5/4 is effectively an "Installation Standard" and applies to the total harmonic generating equipment installed by a consumer. G5/4 identifies consumers by their PCC to the supply and applies limits at that point. G5/4 is not a product or equipment standard and therefore no single item of equipment can be said to comply.

Note: (1) Based at full load conditions.

**Liquid Level Sensor**

The liquid level sensor is designed to measure the amount of refrigerant inside the flooded evaporator of a Turbochill and send a current signal between 4 and 20mA to the microprocessor.

This signal is used by the controller to control the flow of refrigerant into the evaporator for optimal and energy efficient performance. The liquid level sensor will be calibrated and located on the evaporator upon dispatch of the unit. However in the following section there is a quick guide on how to reset and recalibrate the sensor.

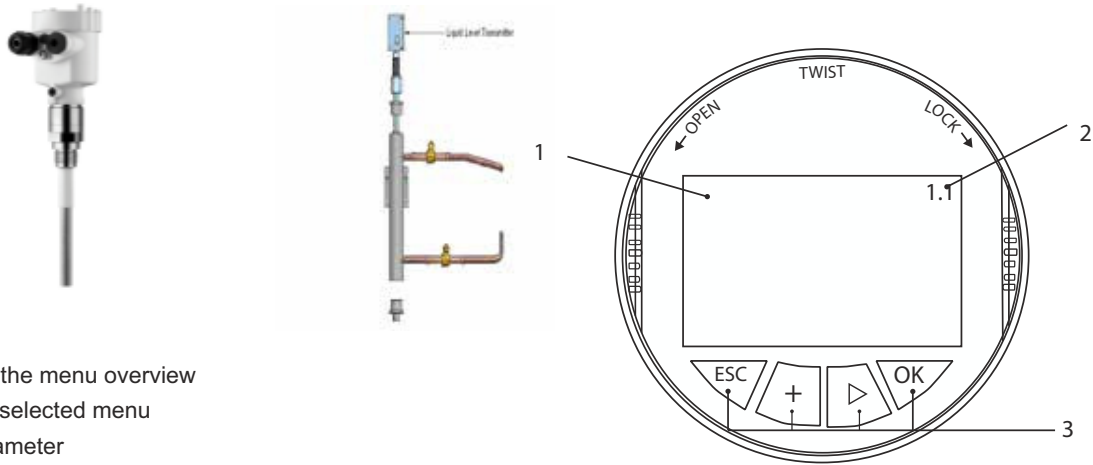

Technical FreeCool

**OK key**

- Move to the menu overview
- Confirm selected menu
- Edit parameter
- Save Values

▷ key to select

- Menu Change
- List entry
- Select editing position

+ key

- Change value of the parameter

**ESC key**

- Interrupt input
- Jump to the next higher menu

Setup instructions / guide	The liquid level sensor is used to monitor the level of refrigerant inside the evaporator by sending a 4 to 20mA signal to the controller. The transmitter then governs the amount of refrigerant in the evaporator.
Step 1 Apply power	To set-up the sensor, power needs to be applied. This can be done by turning on the breaker within the control panel. After power is applied the level sensor does an internal check for 30 seconds. This check includes the internal electronics, the sensor type etc. The output signal jumps briefly to the fault condition (10 seconds.)
Step 2 Minimum adjustment	Through the menu structure "Basic adjustment", select the "min adjustment". Set to 0.00% (58.00 pF)
Step 3 Maximum adjustment	Set the maximum adjustment Set to 100.00% (101.00 pF)
Step 4 Damping	Set the damping to "0". This suppresses any fluctuation in the display level.
Further information	Further information is available from Airedale upon request.

## Pre Start Checks

**CAUTION**

ALL work MUST be carried out by technically trained competent personnel.

The equipment contains live electrical and moving parts, ISOLATE prior to maintenance or repair work.

**Water Flow**

Make sure that you have the correct water flow rate before turning the unit on. (Refer to commissioning documentation)

**CAUTION**

If the unit is operated without water the unit will be damaged.

**Shut Off Valves**

All shut off valves must be opened prior to starting unit.

**Electrical Power Supply**

The power supply to the unit must be correct to design. The three phase power must be of correct phase orientation. A permanent single phase supply (L4) provides power to the microprocessor and evaporator trace heater.

**IMPORTANT**

Check phase rotation of electrical supply prior to running the compressor as it's direction sensitive.

**Visual Inspection**

Check that the unit is of satisfactory condition and that it's not damaged.

**CAUTION**


A damaged component could indicate a reason why the unit is not operating. For example: A refrigerant leak etc.

**Electrical Overloads**






Check that circuit breakers are all turned on. If not investigate why they have tripped. This could be the reason why the unit has turned off.

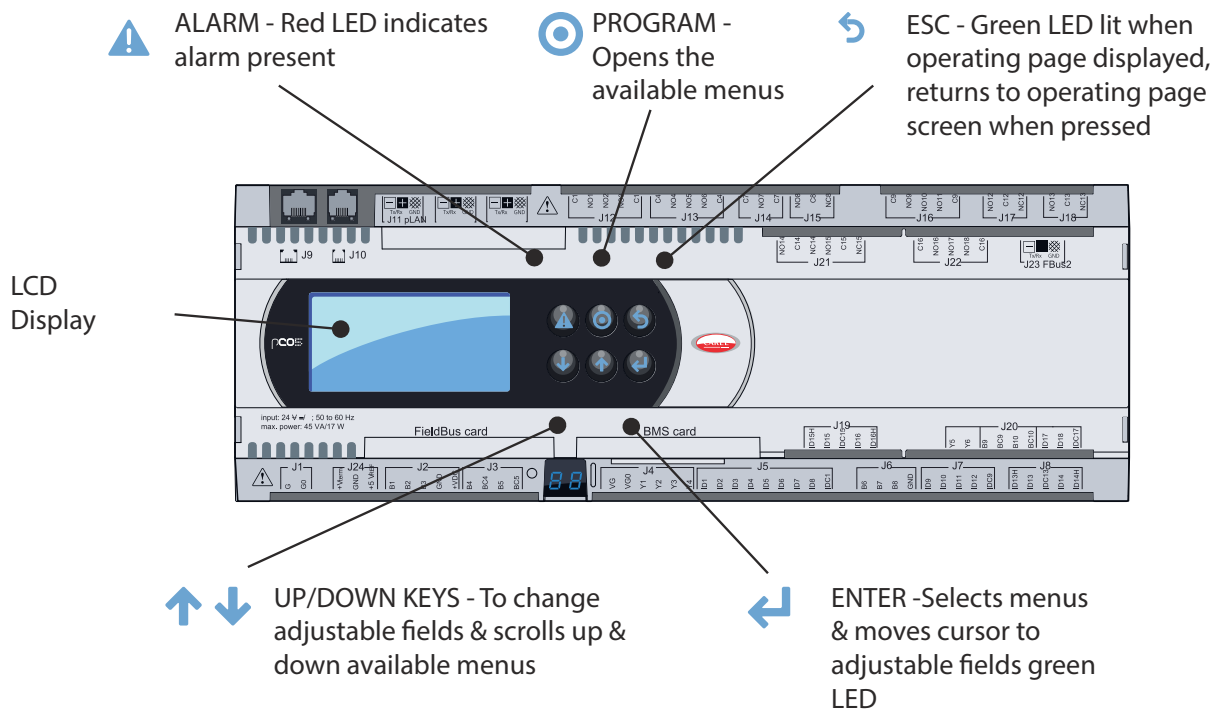**pCO5 Built In Display and Keypad**

The in-built display is equipped with LCD display (8 rows x 22 columns) with 6 buttons.



**Display/Keypad**

- 1  UP/DOWN KEYS - to change adjustable fields & scrolls up & down available menus
- 2  ENTER - selects menus & moves cursor to adjustable fields blue led
- 3  ESC - green LED lit when operating page displayed, returns to operating page screen when pressed
- 4  PROGRAM - opens the available menus
- 5  ALARM - red LED indicates alarm present
- 6 8 ROW LCD DISPLAY
- 7 CURSOR (FLASHING) Top left position = "HOME" indicates adjustable fields

**Monitoring**

The microprocessor also monitors and displays the following measured parameters:

- Supply water temperature
- Return water temperature
- Suction pressure of each circuit
- Liquid pressure of each circuit
- Suction temperature at each circuit
- Superheat for each circuit






### Unit Operation



The unit must not be started unless the pre start checks have been carried out.


### Restarting the Unit




To turn the unit on press the  key to enter the program menu.


Using the  or  keys select the Unit On/Off option and press .

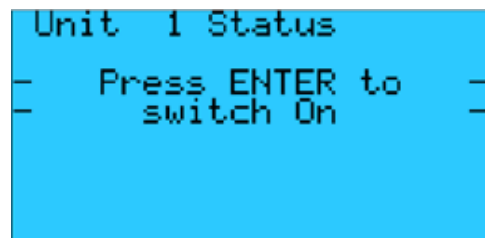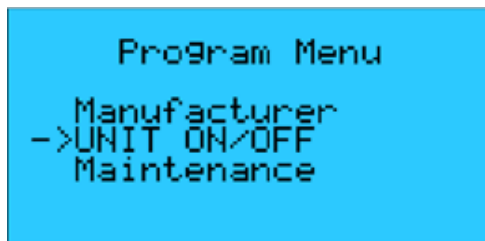


When  is pressed the above screen will be shown.

To turn the unit on simply press the  key again and the screen will change:

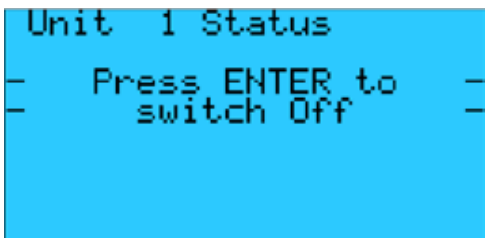





**CAUTION**  
The chiller will be going through its start-up sequence.  
Pressing  will turn the unit off.


Once the screen has changed to the above press the  key which will return back to the main screen




**Changing the Setpoint**



To change the set point of the unit from the main screen press the  button.

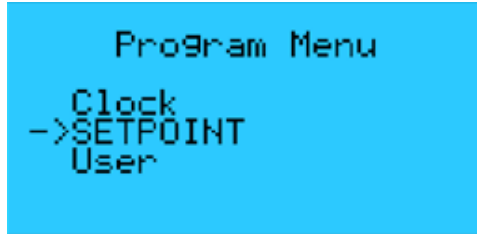
Use the  and  to scroll to the set point option as shown below and press 



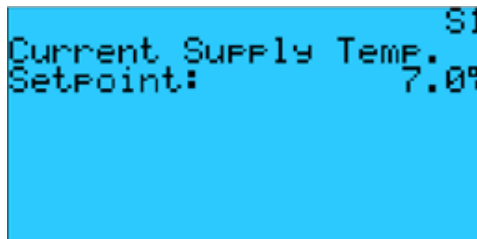


The following screen will be shown:




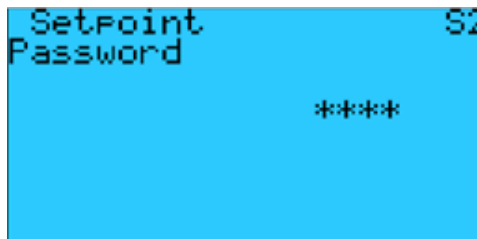



Using the  or  button scroll to the password screen

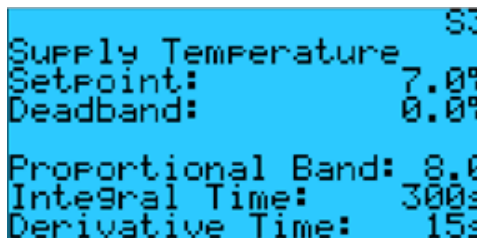

Enter the password 4648 using the  and  keys and press  after each number is entered. (The numbers start at 5555. So down one to 4, up one to 6 etc).

When the final number is entered the screen will jump to the set point adjustment screen:



To adjust the set point press the  key to highlight the set point, using the  and  keys enter the required set point and press the  key until the cursor returns to the top of the screen.


**Enabling Pumps**

**Pump Start-Up**

Use the start-up guide for the general setting of the pump controller including the setting of the correct direction of rotation.

The start-up guide will be started the first time when the controller is connected to a supply voltage.

It can be restarted in the menu under GENERAL. Please note that in this case all previous settings will be erased.

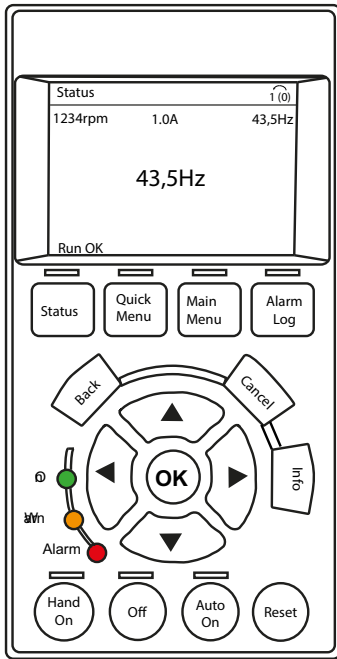

**Editing Buttons**

- OK** Select parameter and enables the change of parameters
- Hand On** Enables control of drive via the GLCP. Start the motor and allows speed setting using arrow keys.
- Off** Stops the motor.
- Auto On** Enables drive control in controls input
- Reset** Resets the drive after an alarm

**Indicator Lights**

- Open**
  - The pump running has stopped by a dysfunction
  - flashing the pump has been stopped by the user (Closed external start stop bus).
- Warn (orange)**
  - The pump has been stopped in the on/off button.
- Alarm (red)**
  - Indicates an alarm or warning

**Navigation Buttons**

- Left/Right** Navigates from one menu to another. When the menu is changed, the display shows always the top display of the new menu.
- Up/Down** Navigates up and down in the individual menu.
- Back** Reverts to the previous step or layer in the navigation structure.
- Cancel** Last change or command will be cancelled as long as the display has not been changed.
- Info** Displays info about a command, parameter of function.
- Status** Indicates the status of the drive and / or motor.
- Quick Menu** Allows quick setup of the drive, most common parameters and functions can be accessed here.
- Main Menu** Used to access all parameters for programming.
- Alarm Log** Displays a list of the 10 latest alarms, Extra info can be obtained by selecting the alarms.

**Running the pump alone for low ambient flow protection or during commissioning.**

To run the pumps alone without operating the compressors, the following procedure is carried out:

1. Set the remote unit ON / OFF to the OFF position (Open Circuit).
2. Remote pump ON / OFF to ON position (Closed Circuit).
3. Turn the unit ON by display through the microprocessor.

The pumps on the chiller will start. Cooling will not be enabled until the remote unit ON / OFF is to the ON position.

This method is used to ensure that there is water flow through the chiller during periods of unit shut down.

To reinstate cooling the unit remote ON / OFF is to be Closed.



### Operational Maintenance checks

#### Owners Responsibility

To ensure that the chiller can be maintained correctly ensure the following requirements are met.

Maintain a safe working environment around the chiller, free from obstructions and debris.

The unit shall follow the maintenance schedule below as a minimum.

**CAUTION**  
 The equipment contains live electrical and moving parts, ISOLATE prior to maintenance or repair work.

Ensure lock off procedures are carried out accordingly.

If inverter driven pumps are used ensure at least 5 minutes is allowed for them to discharge any electrical charge.

### Maintenance

#### General Inspections

	Task	Frequency		
		3 Mths	12 Mths	60 Mths
General Inspections	Check for visible mechanical damage to unit.	•		
	Visually inspect the unit for general wear and tear, treat metalwork.	•		
	Rust should be inhibited, primed and touched up with matching paint.			
	Check for excess vibration from other rotating equipment.	•		
	Clean Microchannel condenser coil	•		

Maintenance



#### Service Tools / Test Equipment

- Touch-up Paint
- Stiff Brush

#### Safety Equipment

- Safety Glasses / Goggles

#### Procedures

##### Coil Cleaning

To clean micro channel condenser coils use detergent and a stiff bristled brush.

For heavy dirt, use either a high pressure water with a broad spray pattern or a non acidic cleaner (Ph ≥7 <10.5).

Do not steam clean.

**Maintenance**

**Electrical Inspection**

	Task	Frequency		
		3 Mths	12 Mths	60 Mths
Electrical Inspection	Check mains power supply voltages		•	
	Check electrical terminals are tight.		•	
	Check for signs of hot spots/ discolouration on power cables.		•	
	Check amperages are as per design.	•		



Service Tools / Test Equipment	Safety Equipment
<ul style="list-style-type: none"> <li>• Voltmeter</li> <li>• Screwdrivers / Allen Keys</li> <li>• Ammeter</li> </ul>	<ul style="list-style-type: none"> <li>• Safety Glasses / Goggles</li> </ul>

**Procedures**

**Electrical Connections**

Ensure all electrical connections are tight and correctly terminated.

**Electrical Earthing**

Check that the unit is correctly earthed.

**Voltage**

Measure the voltage at the following points and record on the maintenance sheet:

- Voltage at busbar
- Dedicated power supply
- Voltage at permanent supply
- Control voltage at transformer (min 22.5V, max 25V)

The voltage measurements should be carried out with the unit MCB's turned off.

**EC Fan Interrogation**

The EC fans can be interrogated by connecting a hardware interface kit from the fan to a PC. The kit comprises of a USB to RS232 9-pin "D-type" adapter. This should be installed on the PC with the software supplied with the kit.

The "COM" port of the USB to RS232 adapter should be assigned to a free COM port between COM 1 and 4 via the system device manager.

Connect the RS232 to RS485 interface converter to the USB port of your PC via the USB to RS232 serial interface lead and connect the RS485 output to the fan.

Tx += RS A      Tx - = RS B

(Except high airflow fans. Interogation is via a separate module available from Airedale)

Maintenance

**Maintenance**

**Refrigeration**

	Task	Frequency		
		3 Mths	12 Mths	60 Mths
Refrigeration	Compare the following and compare results with commissioning records:			
	Suction, liquid and discharge pressures.	•		
	Refrigeration system temperatures, suction, liquid and discharge. Record superheat and sub cooling temperatures.	•		
	Check each circuit sight glass for dryness and bubbles for indication of leaks.	•		
	Head pressure control is maintained.	•		
	Record details on F-Gas record.	•		
	Pressure relief valves. (replace in accordance to building insurance)			•



**Service Tools / Test Equipment**

- Refrigerant Manifold Gauges
- Spanners
- Voltmeter

**Safety Equipment**

- Safety Glasses / Goggles
- Gloves
- Overalls

**Procedures**

**HP / LP Safety Pressure Switch Settings**

Check operation of HP/LP cut-out.

**Settings**

LP cut-out – (Auto reset for 3 times when the Low Pressure is detected over a period of 1 hour)

Has a 2 minute delay on start-up (similar to a Low ambient kit)

Low pressure cut-out 0.29 +/- 0.2 Barg

HP switch (Manual reset): High pressure switch 17.5 Barg +/- 0.7 Barg

HP limiting function 15.0 Barg / 1.5 Barg differential

**Maintenance**

**Waterside**

	Task	Frequency		
		3 Mths	12 Mths	60 Mths
Waterside	Check pressure drop of water strainer against graphs. If excessive clean the strainer.		•	
	Visually inspect pipe and pipework insulation. Ensure pipework clamps are secure.		•	
	Inspect for water leakage.	•		
	Check pressure drop of evaporator against graphs. Clean evaporator if excessive.	•		
	Check condition of Water / Glycol solution to ensure that the system is protected against corrosion, scale and microbiological fouling, ensuring maximum heat transfer efficiency.	•		



**Service Tools / Test Equipment**

- Spanners
- Manometer
- Thermometer
- Refractometer

**Safety Equipment**

- Safety Glasses / Goggles
- Gloves
- Overalls

**Procedures**

**Water Strainer**

A water strainer must be fitted to the inlet side of the chiller evaporator. Failure to do so may result in severe damage and will void the AIREDALE warranty.

**Water Flow Rate**

Check that the design water flow rate is available to the unit. If not available do not turn unit on.

**Waterside Pressure Drop**

Measure the waterside pressure drop of the unit ensuring that the pump (if fitted) is operating.

**Glycol Strength**

Check and record the glycol type and strength. Low levels of glycol can cause freeze up problems when operating at low temperatures or during the unit off state during cold ambient conditions.

Glycol concentration is measured by use of a Refractometer.

Maintenance

**Differential Pressure Sensor**

Ensure that the differential pressure sensor operates satisfactorily; the best way to do this is to reduce the flow to the chiller.

From pressure curves determine the design flow rate / pressure drop

Make sure that any effects of glycol in the system are taken into account (flow rate and pressure drop).

Input into the controller the reduced pressure drop (kPa) value (normally 80% of design flow rate)

Once this value is programmed into the controller the water flow rate can be reduced to verify that the low flow alarm is activated.

Ensure that the tubes connected to the sensor are insulated.

**Flow Switch**

A “paddle” type flow switch is fitted, wired to the chiller control panel and tested. This should be fitted on the outlet of the evaporator and before isolation valves.

A flow switch must also be fitted on the condenser outlet (water cooled models).

**Pump Interlock**

Check that the pump interlock is fitted and functioning correctly.



**Maintenance**

**Controls**

Controls	Task	Frequency		
		3 Mths	12 Mths	60 Mths
	Change controller battery.		•	

The controller will keep the strategy for a short period of time with no battery.



**Service Tools / Test Equipment**

- Small Terminal Screwdriver

**Safety Equipment**

- Electrostatic Wristband

**Procedures**

The following controller settings are to be recorded on the maintenance sheet:

- Head pressure differential (bar)
- Minimum suction pressure (bar)
- Supply water set point (Summer / Day) (°C)
- Supply water set point (Winter / Night) (°C)
- Minimum supply water temperature (°C)

**Maintenance**

**System**

	Task	Frequency		
		3 Mths	12 Mths	60 Mths
System	Check the following against the commissioning records:			
	Record operating conditions.	•		
	Water on / off temperatures.	•		
	Water pressure drop.	•		

**Unit Operation Checks**

Record the following operating conditions of the unit at stable conditions:

- Suction pressure (bar)
- Liquid pressure (Bar)
- Discharge pressure (Bar)
- Suction temperature (°C)
- Liquid temperature (°C)
- Discharge temperature (°C)
- Superheat (K)
- Sub cooling (K)
- Water return temperature (°C)
- Water supply temperature (°C)

**Low supply water trip**

To check operation of the low temperature trip the following procedure can be carried out.

With the unit running increase the low temperature limit to the actual supply water temperature.

This will trip the unit in a safe manner without risk of freezing the evaporator.

Return the low temperature limit to correct value after test (this will allow the unit to operate correctly).

**Liquid line sight glass**

Record the status of the liquid line sight glass:

- Clear / Flashing
- Wet / Dry

The sight glass is used to indicate:

- The condition of the refrigerant in the system
- Lack of refrigerant
- Moisture content of the refrigerant

The colour of the sight glass depends on the moisture content of the refrigerant. The recommended moisture levels of a system should be below 75ppm.

An indication of green / dry are to be considered as perfect conditions meaning full protection by the filter drier against effects from moisture.

If the green colour starts to fade, the colour change from green to yellow has begun and the indicator should therefore be watched carefully. If the colour changes to yellow it is a clear signal that the capacity of the filter drier is exceeded and should be replaced as soon as possible.

**F-Gas Leak Detection Checks**

Perform an F-Gas refrigerant leak detection on the unit and ensure no refrigerant leaks are found.

Checks must also be carried out on the operation of the refrigerant leak detector in accordance to manufacturers instructions.

**Troubleshooting**

	<b>Fault</b>	<b>Possible Cause</b>	<b>Remedy / Action</b>
General	Unit will not start	No power. Wired incorrectly. Loose wires. Remote on/off.	Check power supply to the controller. Check wire connections in accordance with wiring diagram. Check all wires, connections, terminals etc. Check that the remote on/ off is at the on position.
Refrigeration	Compressor not operating	No power to compressor. Low pressure cut-out operated (large or complete loss of refrigerant charge). Compressor showing fault on controller.	Check isolator, fuses, MCBs, contactor and control circuit wiring. Recover refrigerant, repair, pressure test, evacuate and recharge system. Determine fault, refer to alarm codes for further information.
	Head pressure too high / HP cut-out operated	Condenser coil clogged or dirty. Overcharge of refrigerant. Normally troublesome in warm weather. Air or other non-condensable gas in system. Head pressure controller faulty. Fan not operating or operating inefficiently.	Clean condenser. Remove excess refrigerant from system using correct refrigerant handling techniques. Evacuate system and re-charge with new refrigerant. Check EC fan control module - if faulty - replace. Check motor - if faulty - replace.
	Head pressure too low	Fan operating too fast in low ambient conditions.	Check EC fan control module - if faulty - replace.
	Suction pressure too low	Flash gas (bubbles in sight glass) at liquid line. Clogged filter drier (pressure / temperature drop across it).	Investigate for refrigerant leaks, repair, pressure test, evacuate and re-charge system. Replace drier cores.
Condenser	Condenser fan not operating - power on	Power supply failure. Wiring to motors. Motor / fan assembly jammed. Motor internal overheat protector tripped. Faulty motor windings / capacitor. Minimum speed set too low.	Check power supply at circuit breaker. Check voltage at motor terminals. Isolate unit and check free rotation of motor/fan assembly. If faulty - replace. Carry out continuity check at terminals "TK" in motor terminal box. If tripped and motor hot - check to see if the motor bearings have seized / fan difficult to turn. If tripped and motor cold - replace motor. Motor humming would indicate fault in motor or capacitor. Check windings for continuity and if OK replace capacitor. Adjust head pressure controller to suit.
	Condenser fan runs too fast	High ambient condition or excessive re-circulation of air around condenser coil. Minimum set speed setting incorrect. Incorrect pressure sensor setting. Faulty EC fan. Faulty pressure sensor.	Check installation against design. Adjust as necessary. Adjust via microprocessor. Replace fan. Replace sensor.
	Condenser fans runs only slowly	Incorrect pressure setting. Faulty EC fan. Faulty pressure sensor. Motor / capacitor faulty. Motor wired incorrectly.	Adjust via microprocessor. Replace fan. Replace sensor. Replace. Check against wiring diagram - correct as required.


Troubleshooting

	Fault	Possible Cause	Remedy / Action
Waterside	Pump not operating	No power to pump. Inverter tripped and does not auto reset (the microprocessor will try and auto reset 3 times)	Check isolator, fuses, MCBs, contactor and control circuit wiring.  Reset inverter drive via microprocessor.
	No water flow	Strainer blocked.	Clean strainer
	Pump noisy	Air in water system. Pump cavitations.	Purge air from water system. Ensure there is 0.5m NPSH suction head to avoid cavitations.
	Unit not operating due to water pressure sensor low limit alarm.	Low flow alarm operating.	Check that the low flow pressure variable is set correctly. If too high the unit may have nuisance trips.
	Low temp limit alarm	Partial blockage in evaporator causing low flow.(1) No heatload on system	Clean evaporator Ensure heatload is available for unit to operate
	Water/ Glycol freezing up (crystallizes)	Insufficient glycol / water concentration for operating temperatures.	Check glycol concentration and add accordingly.

(1) The water flow is reduced however the differential pressure switch may still remains healthy as the pressure would increase.

## Alarms

### Alarm Menu Display

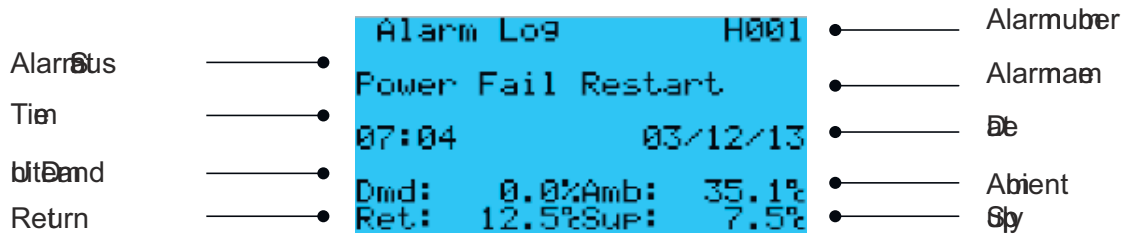

### Alarm Log

The alarm page offers a log of the last 150 alarm messages in a scrolling log, pressing the alarm button will enter the alarm page.


Consequently the most recent alarm has the lowest log number (001) and will be displayed upon entering the alarm page. As another alarm occurs, the alarm number increases until 150 alarms have occurred. From this point on, alarm 001 moves to 002 and any new alarm will reside in position 001.

As new alarms are generated and cleared, the highest number logs (150) in the scroll will be lost.

### Viewing the Alarm Log


By using the arrow keys, the last 150 alarms generated can be reviewed in chronological order. The display provides the alarm type information and the time and date of each alarm occurrence.

### Alarm Detection

When the controller detects an alarm an output is generated to the relevant alarm relay which in turn illuminates the button. To see which alarm has accrued press the  button and the most recent alarm will be displayed.

If the alarm light is on, the alarm page can be interrogated to identify which alarm is active.

### Resetting the Alarm

The auto reset alarms will automatically reset once the conditions are within the set parameters. To clear a manual alarm press the  button twice and the red LED will disappear.

Alarms

Code	Description	Auto Reset	Unit Disabled	Component Disabled	Cause	Action	Default Alarm Type
AL001	Comp1 MB Comms.Offline	•		•	Communication to the compressor has failed	Check: Wiring / modbus card / compressor communication board / compressor fuses and power	1 = Non critical
AL002	Comp2 MB Comms.Offline						1 = Non critical
AL003	Comp3 MB Comms.Offline						1 = Non critical
AL004	Comp4 MB Comms.Offline						1 = Non critical
AL005	Power Meter MB Offline	•	•	•	Communication to the power meter has been lost	Check: wiring / modbus card / power meter	1 = Non critical
AL006	Cond. Pressure1 Fault	•		•	The sensor has gone out of its operating range	Check: wiring / sensor	1 = Non critical
AL007	Evap.Diff.Press. Fault						1 = Non critical
AL008	Evap.Flow Meter Fault						1 = Non critical
AL009	Return Temp. Fault						1 = Non critical
AL010	Supply Temp. Fault						1 = Non critical
AL011	Temp. Setpoint Fault						1 = Non critical
AL012	Cond.Air On Temp Fault						1 = Non critical
AL013	Clock Alarm						•
AL014	Phase Failure	•	•	•	The 3 phase power supply crossed / loss (wait 30s with a power meter on power up)	Check 3 phase connection	2 = Critical
AL015	Emergency Stop	•	•	•	The emergency stop button has been pressed	Release the emergency stop button	2 = Critical
AL016	Evaporator Flow Alarm	•	•	•	No evaporator flow has been detected	Check: pumps are running / flow	2 = Critical
AL017	Low Pressure 1 Switch	•	•	•	Circuit 1 suction pressure below 0.5 bar	Check: refrigerant charge / EEV operation	2 = Critical
AL018	Comp1 Status Alarm	•		•	Contactor has been switched on but has failed to operate	Check: high pressure switch / contactor. / wiring.	1 = Non critical
AL019	Comp2 Status Alarm						1 = Non critical
AL020	Comp3 Status Alarm						1 = Non critical
AL021	Comp4 Status Alarm						1 = Non critical
AL022	Mains Failure	•	•	•	The permanent L4 supply has failed to the control panel	Check: L4 supply	2 = Critical
AL023	Pump1 Status Alarm		•	•	Contactor has been switched on but has failed to operate	Check: contactor / wiring	1 = Non critical
AL024	Pump2 Status Alarm						1 = Non critical

Troubleshooting

## Alarms

Code	Description	Auto Reset	Unit Disabled	Component Disabled	Cause	Action	Default Alarm Type
AL025	Low Supply Temperature	•	•	•	The supply water temperature is too low	Check: flow rate / Unit TD	1 = Non critical
AL026	High Cond. Pressure 1	•	•	•	Circuit 1 condensing pressure is higher than 13.6Bar	Check: condenser / condenser fans	1 = Non critical
AL027	pCO <sub>2</sub> Module Offline	•		•	Communication to the pCO <sub>2</sub> expansion module has been lost	Check: communications link / wiring	1 = Non critical
AL028	Leak Detector 1 Fault			•	The output from the leak detector is out of range	Check: leak detector / wiring	1 = Non critical
AL029	Leak Detector 2 Fault			•			1 = Non critical
AL030	Leak Detector 3 Fault	•		•			1 = Non critical
AL031	Leak Detector 4 Fault			•			1 = Non critical
AL032	Possible Leak Comp.1				The reading from the leak detector is above the threshold	Check: pipe work around the leak detector	1 = Non critical
AL033	Possible Leak Comp.2	•					1 = Non critical
AL034	Possible Leak Comp.3						1 = Non critical
AL035	Possible Leak Comp.4						1 = Non critical
AL036	Inverter Temp. Comp.1	•		•	The temperature of the compressor inverter is high	Check: liquid line to the compressor / solenoid valves	1 = Non critical
AL037	Discharge Temp. Comp.1	•		•	The temperature of the discharge gas is high	Check: refrigerant charge / discharge temperature sensor	1 = Non critical
AL038	Suction Press. Comp.1	•		•	The suction pressure is too high / low at the compressor	Check: charge / system load / sensor / suction strainer	1 = Non critical
AL039	Discharge Press.Comp.1	•		•	The discharge pressure has exceeded it limit	Check: The sensor / condenser/ shut off valves	1 = Non critical
AL040	3Ph. Current Comp.1	•		•	Indicates there maybe an excessive load on the system		1 = Non critical
AL041	Cavity Temp. Comp.1	•		•	The cavity temperature inside the compressor is high	Check: the liquid cooling line / solenoid valve	1 = Non critical
AL042	Air/Water Temp. Comp.1	•		•	There maybe insufficient water flow due to air gaps	Check: Sensor limits	1 = Non critical
AL043	Compress. Ratio Comp.1	•		•	The compression ratio of the compressor is out of range	Check: condenser / evaporator loads and settings	1 = Non critical

Alarms

Code	Description	Auto Reset	Unit Disabled	Component Disabled	Cause	Action	Default Alarm Type
AL044	Bearing Reset Comp.1	•		•	Low suction pressure / liquid	Check: refrigerant circuit	1 = Non critical
AL045	SCR Temp. Comp.1	•		•	Indicates insufficient cooling to the SCR plate	Check: alarms limits in the compressor	1 = Non critical
AL046	System Lockout Comp.1			•	When a SCR / inverter / cavity temperature fault occurs more than 3 time in 30minutes	Check: motor cooling line and solenoids valves / cycle compressor power	1 = Non critical
AL047	Inverter Temp. Comp.2	•		•	The temperature of the compressor inverter is high	Check: liquid line to the compressor / solenoid valves	1 = Non critical
AL048	Discharge Temp. Comp.2	•		•	The temperature of the discharge gas is high	Check: refrigerant charge / discharge temperature sensor	1 = Non critical
AL049	Suction Press. Comp.2	•		•	The suction pressure is too high / low at the compressor	Check: charge / system load / sensor / suction strainer	1 = Non critical
AL050	Discharge Press.Comp.2	•		•	The discharge pressure has exceeded it limit	Check: the sensor / condenser/ shut off valves	1 = Non critical
AL051	3Ph. Current Comp.2	•		•	Indicates there maybe an excessive load on the system		1 = Non critical
AL052	Cavity Temp. Comp.2	•		•	The cavity temperature inside the compressor is high	Check: the liquid cooling line / solenoid valve	1 = Non critical
AL053	Air/Water Temp. Comp.2	•		•	There maybe insufficient water flow due to air gaps	Check: sensor limits	1 = Non critical
AL054	Compress. Ratio Comp.2	•		•	The compression ratio of the compressor is out of range	Check: condenser / evaporator loads and settings	1 = Non critical
AL055	Bearing Reset Comp.2	•		•	Low suction / liquid	Check: refrigerant Circuit	1 = Non critical
AL056	SCR Temp. Comp.2	•		•	Indicates insufficient cooling to the SCR plate	Check: alarms limits in the compressor	1 = Non critical
AL057	System Lockout Comp.2			•	When a SCR / inverter / cavity temperature fault occurs more than 3 time in 30 minutes	Check: motor cooling line and solenoids valves / cycle power	1 = Non critical
AL058	Inverter Temp. Comp.3	•		•	The temperature of the compressor inverter is high	Check: liquid line to the compressor / solenoid valves	1 = Non critical
AL059	Discharge Temp. Comp.3	•		•	The temperature of the discharge gas is high	Check: refrigerant charge / discharge temperature sensor	1 = Non critical

Troubleshooting



Alarms

Code	Description	Auto Reset	Unit Disabled	Component Disabled	Cause	Action	Default Alarm Type
AL060	Suction Press. Comp.3	•		•	The suction pressure is too high / low at the compressor	Check: charge / system load / sensor / suction strainer	1 = Non critical
AL061	Discharge Press.Comp.3	•		•	The discharge pressure has exceeded it limit	Check: the sensor / condenser/ shut off valves	1 = Non critical
AL062	3Ph. Current Comp.3	•		•	Indicates there maybe an excessive load on the system		1 = Non critical
AL063	Cavity Temp. Comp.3	•		•	The cavity temperature inside the compressor is high	Check: the liquid cooling line / solenoid valve	1 = Non critical
AL064	Air/Water Temp. Comp.3	•		•	There maybe insufficient water flow due to air gaps	Check: sensor limits	1 = Non critical
AL065	Compress. Ratio Comp.3	•		•	The compression ratio of the compressor is out of range	Check: condenser / evaporator loads and settings	1 = Non critical
AL066	Bearing Reset Comp.3	•		•	Low suction / liquid	Check: refrigerant circuit	1 = Non critical
AL067	SCR Temp. Comp.3	•		•	Indicates insufficient cooling to the SCR plate	Check: alarms limits in the compressor	1 = Non critical
AL068	System Lockout Comp.3			•	When a SCR / inverter / cavity temperature fault occurs more than 3 time in 30 minutes	Check: motor cooling line and solenoids valves / cycle power	1 = Non critical
AL069	Inverter Temp. Comp.4	•		•	The temperature of the compressor inverter is high	Check: liquid line to the compressor / solenoid valves	1 = Non critical
AL070	Discharge Temp. Comp.4	•		•	The temperature of the discharge gas is high	Check: refrigerant charge / discharge temperature sensor	1 = Non critical
AL071	Suction Press. Comp.4	•		•	The suction pressure is too high / low at the compressor	Check: charge / system load / sensor / suction strainer	1 = Non critical
AL072	Discharge Press.Comp.4	•		•	The discharge pressure has exceeded it limit	Check: the sensor / condenser/ shut off valves	1 = Non critical
AL073	3Ph. Current Comp.4	•		•	Indicates there maybe an excessive load on the system		1 = Non critical
AL074	Cavity Temp. Comp.4	•		•	The cavity temperature inside the compressor is high	Check: the liquid cooling line / solenoid valve	1 = Non critical
AL075	Air/Water Temp. Comp.4	•		•	There maybe insufficient water flow due to air gaps	Check: sensor limits	1 = Non critical
AL076	Compress. Ratio Comp.4	•		•	The compression ratio of the compressor is out of range	Check: condenser / evaporator loads and settings	1 = Non critical
AL077	Bearing Reset Comp.4	•		•	Low suction / liquid	Check: refrigerant Circuit	1 = Non critical

Troubleshooting

Alarms

Code	Description	Auto Reset	Unit Disabled	Component Disabled	Cause	Action	Default Alarm Type
AL078	SCR Temp. Comp.4	•		•	Indicates insufficient cooling to the SCR plate	Check: alarms limits in the compressor	1 = Non critical
AL079	System Lockout Comp.4			•	When a SCR/inverter/cavity temperature fault occurs more than 3 time in 30minutes	Check: motor cooling line and solenoids valves / cycle power	1 = Non critical
AL080	Hours Limit Comp.1			•	The hours run for the compressor has exceeded the threshold	If component is functioning correctly perform maintenance and reset hours	1 = Non critical
AL081	Hours Limit Comp.2			•			1 = Non critical
AL082	Hours Limit Comp.3	•		•			1 = Non critical
AL083	Hours Limit Comp.4			•			1 = Non critical
AL084	Hours Limit Pump 1			•	The hours run for the pumps has exceeded the threshold	If component is functioning correctly perform maintenance and reset hours	1 = Non critical
AL085	Hours Limit Pump 2	•		•			1 = Non critical
AL086	Liquid Level 1 Fault	•		•	Circuit 1 liquid level sensor has gone out of range	Check: the sensor / Wiring	1 = Non critical
AL087	CW Valve Feedback	•		•	Valve failed to open	Check: valve operation / Wiring	1 = Non critical
AL088	Cond. Pressure2 Fault	•	•	•	Circuit 2 condensing pressure sensor has gone out of its operating range	Check: wiring / Sensor	1 = Non critical
AL089	Low Pressure 2 Switch			•	Circuit 2 suction pressure is below 0.5 bar	Check: refrigerant charge / EEV operation	2 = Critical
AL090	High Cond. Pressure 2			•	Circuit 2 condensing pressure is higher than 13.6 Bar	Check: Condenser / Condenser Fans	1 = Non critical
AL091	Liquid Level 2 Fault	•	•	•	Circuit 2 liquid level sensor has gone out of range	Check: wiring / Sensor	1 = Non critical
AL092	Evap.Inlet Temp. Fault	•	•	•	The sensor has gone out of its operating range	Check: wiring / sensor	1 = Non critical
AL093	Serious Alarm Comp.1			•	The compressor has been in alarm more than 5 times in 2 hours	Check the operation of the compressor / circuit	1 = Non critical
AL094	Serious Alarm Comp.2			•			1 = Non critical
AL095	Serious Alarm Comp.3			•			1 = Non critical
AL096	Serious Alarm Comp.4			•			1 = Non critical
AL097	Evap. Low Flowrate		•	•	The evaporator flow rate is equal to or less than 20% of design	Check the evaporator strainer, or for any other blockages	1 = Non critical
AL098	Liq. Valve EVD1 Alarm			•	The electronic expansion valve driver used to position the flooded evaporator liquid level control valve is in alarm	Check the wiring between the EVD and the liquid level control valve / check the operation of the control valve stepper motor	2 = Critical
AL099	Liq. Valve EVD2 Alarm			•			2 = Critical

Troubleshooting

Alarms

Code	Description	Auto Reset	Unit Disabled	Component Disabled	Cause	Action	Default Alarm Type
AL100	High Liquid Level Cct1	•			High level of refrigerant in flooded evaporator	Check the operation of the liquid level control valve	1 = Non critical
AL101	Low Liquid Level Cct1	•			Low level of refrigerant in flooded evaporator	Check the operation of the liquid level control valve / refrigerant leak	1 = Non critical
AL102	High Liquid Level Cct2	•			High level of refrigerant in flooded evaporator	Check the operation of the liquid level control valve	1 = Non critical
AL103	Low Liquid Level Cct2	•			Low level of refrigerant in flooded evaporator	Check the operation of the liquid level control valve / refrigerant leak	1 = Non critical
AL104	Cond.Return Temp.Fault	•	•	•	The sensor has gone out of its operating range	Check: wiring / sensor	1 = Non critical
AL105	Cond.Supply Temp.Fault	•	•	•	The sensor has gone out of its operating range	Check: wiring / sensor	1 = Non critical
AL106	Cond.Diff.Press. Fault	•	•	•	The sensor has gone out of its operating range	Check: wiring / sensor	1 = Non critical
AL107	Condenser Flow Alarm	•			No condenser flow has been detected	Check: condenser pump is running / flow	2 = Critical
AL108	Unit Pump Down Cct1			•	The circuit has been partially pump down and disabled	Check for refrigerant loss and reset	2 = Critical
AL109	Unit Pump Down Cct2			•			2 = Critical
AL110	Possible Unit Ref.Leak	•			A possible unit refrigerant leak has been detected	Check for refrigerant loss	1 = Non critical
AL111	Mains Isolator Status Alarm	•	•	•	Mains isolator is off.	If safe to do so switch on.	2 = Critical
AL112	Circuit 1 Condenser Fan Trip	•			One or more condenser fans have tripped on circuit 1.	Check circuit 1 condenser fan operation / wiring.	1 = Non critical
AL113	Circuit 2 Condenser Fan Trip	•			One or more condenser fans have tripped on circuit 2.	Check circuit 2 condenser fan operation / wiring.	1 = Non critical
AL114	Condenser Fan Isolator Status	•		•	Condenser fan isolator is off.	If safe to do so switch on.	1 = Non critical
AL115	Pump Isolator Status	•		•	Pump isolator is off.	If safe to do so switch on.	1 = Non critical
AL116	Refrigerant Leak Detector 1 MB Communications Offline	•			Communication to the leak detector has failed	Check: wiring / modbus connection / leak detector.	1 = Non critical
AL117	Refrigerant Leak Detector 2 MB Communications Offline	•					1 = Non critical
AL118	Refrigerant Leak Detector 3 MB Communications Offline	•					1 = Non critical
AL119	Refrigerant Leak Detector 4 MB Communications Offline	•					1 = Non critical

Troubleshooting

**Pump Alarms**

Code and display text	Warning	Status			Operating Mode	Re-setting
		Warning	Alarm	Locked Alarm		
1	Too high leakage current			•	Stop	Man.
2	Mains phase failure		•		Stop	Auto
3	External fault		•		Stop	Man.
16	Other fault		•		Stop	Auto
				•	Stop	Man.
30	Replace motor bearing	•			-	Man. (3)
32	Overvoltage	•			-	Auto
			•		Stop	Auto
40	Undervoltage	•			-	Auto
			•		Stop	Auto
48	Overload		•		Stop	Auto
				•	Stop	Man.
49	Overload		•		Stop	Auto
55	Overload	•			-	Auto
					Stop	Auto
57	Dry running	•			Stop	Auto
64	Too high CUE temperature	•			Stop	Auto
70	Too high motor temperature	•			Stop	Auto
77	Communication fault, duty / standby	•			-	Auto
89	Sensor 1 outside range		•		(1)	Auto
91	Temperature sensor 1 outside range	•			-	Auto
93	Sensor 2 outside range	•			-	Auto
96	Setpoint signal outside range	•			(1)	Auto
148	Too high bearing temperature	•				Auto
			•		Stop	Auto
149	Too high bearing temperature	•				Auto
			•			Auto
155	Inrush fault		•			Auto
175	Temperature sensor 2 outside range	•			-	Auto
240	Re-lubricate motor bearings	•			-	Man. (3)
241	Motor phase failure	•			-	Auto
			•		Stop	Auto
242	AMA did not succeed (2)	•			-	Man.

(1) in case of an alarm, the CUE will change the operating mode depending on the pump type

(2) AMA, Automatic Motor Adaption

(3) Warning is reset in display 3.20





Head Office  
Airedale International Air Conditioning Ltd  
Leeds Road  
Rawdon  
Leeds LS19 6JY

Tel: +44 (0) 113 2391000  
Fax: +44 (0) 113 2507219

E-mail [enquiries@airedale.com](mailto:enquiries@airedale.com)  
Web [www.airedale.com](http://www.airedale.com)

A **MODINE** Company



**SYSTEMY HVAC Sp. z o.o.**  
ul. Rydygiera 8, 01-793 Warszawa  
tel.: +48 22 101 74 00  
fax: +48 22 101 74 01  
e-mail: [biuro@systemy-hvac.pl](mailto:biuro@systemy-hvac.pl)  
[www.systemy-hvac.pl](http://www.systemy-hvac.pl)

TM\_TURBOCHILL\_TCC\_TCF\_R134a\_200\_1700kW\_7525355\_V1\_2\_0\_08\_2014